



LISTA AS A PARTNER

LISTA offers organisation. With success, experience and a systemic approach. For more than 75 years, we have offered our customers concepts for more organised and efficient working. Because we offer more than just a high-quality product, competent advice and

a wide range of services: the LISTA system creates perfect interlocking solutions for smooth work processes. And this makes us a leading partner in the area of workspace and storage equipment worldwide.



BENEFITS AT A GLANCE

- Comprehensive range from A for access control to W for workstation systems
- Modular system
 all products can be freely combined
- Maximum flexibility
 with a choice of colours, configuration options and more
- Tailor-made solutions for customers with specific needs
- **Expert planning** including visualisation with LISTA Draw
- 10-year guarantee unique in the industry

- Wide range of services such as training, assembly, labelling etc.
- Worldwide distribution and service network for customer service without borders
- First-class references from more than 100,000 prestigious companies worldwide



THE LISTA PROGRAMME

Profile on LISTA	04
Features and special characteristics	22
Drawer cabinets	38
Workshop trolley	80
Drawer storage walls	84
NC storage and transport systems	100
Workstation systems and workbenches	106
Cabinet systems	168
Shelving systems	218
Partition material and labelling system	248
	_
0 1 16 1 1 16 1	270


www.lista.com

Order/Contact partners/Colours

WELCOME TO THE NO. 1

As varied as your challenges in modern storage and workspace equipment are, so too are the industries we provide with suitable solutions. Bet that your business is also on our customer list?

This gives you the certainty that we are experts and know how different the requirements are in the different areas.

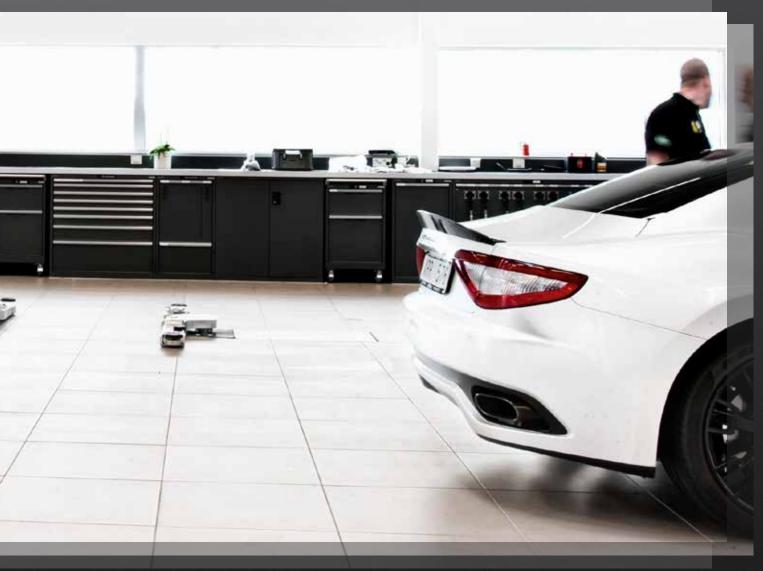

Automotive



Banking and administration



Careers, education and leisure



Fire brigades and police





Healthcare



Aviation



Mechanical engineering



Metalworking



Motor sport



Museums



Public transport



Schools and universities



Watches, jewellery, coins



Maintenance and repair



Defence and security



Tool manufacturers

SYSTEMATIC WORK

The system-based approach is a LISTA trademark. To help you set up your business in the best way possible, we offer you a comprehensive range for all functional areas. Combine individual modules freely as required, from the warehouse, workshop, production and assembly to the office.

Yet the LISTA system cannot only fit in any space. Our products can be individually configured, equipped with matching doors, countertops, variable interior layouts and accessories. And if this still does not lead to the optimal solution, our engineers will develop a special solution for you.


In this way, the LISTA system combines a consistent look and feel with individual functionality, thereby creating the basis for efficient processes in your company. In other words, LISTA allows you to work faster, more productively or simply better.



OPTIMUM MATERIAL FLOW

In addition to ergonomic workplace design and storage, the fast and easy transport of goods and material is a decisive criterion for efficiency and productivity in a company. LISTA solutions ensure a smooth material flow and thus make a valuable contribution to further optimising your intralogistics. More on this starting on page 36.



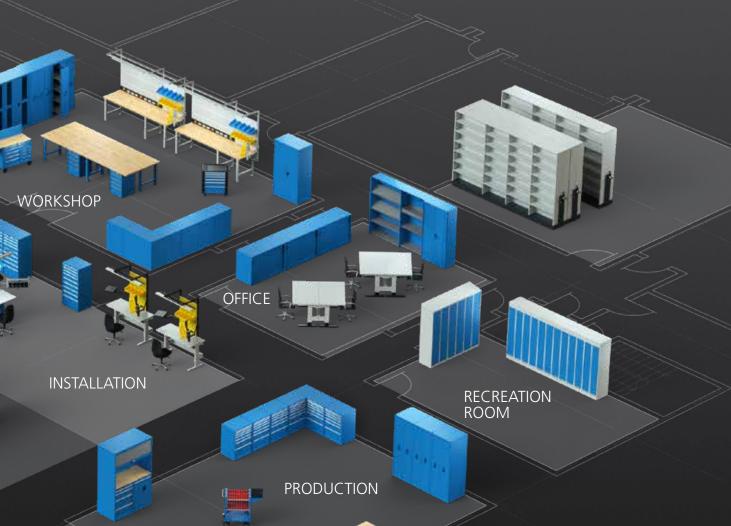

STANDARD PRODUCTS

pre-configured for you



SYSTEM SOLUTIONS

- individually configurable products
- separate components
- accessories

SPECIAL SOLUTIONS

- individual engineering
- industry-specific solutions



LISTA SYSTEM SOLUTIONS AT A GLANCE

The working world is becoming more varied. So it is quite fitting that LISTA system solutions can be used to design working environments flexibly and according to requirements. The indivi-

dual modules are available in different versions and offer numerous options for individual configuration. After all, we don't want to sell you just anything, but always the solution that suits you.

DRAWER CABINET




WORKSTATION








CABINET

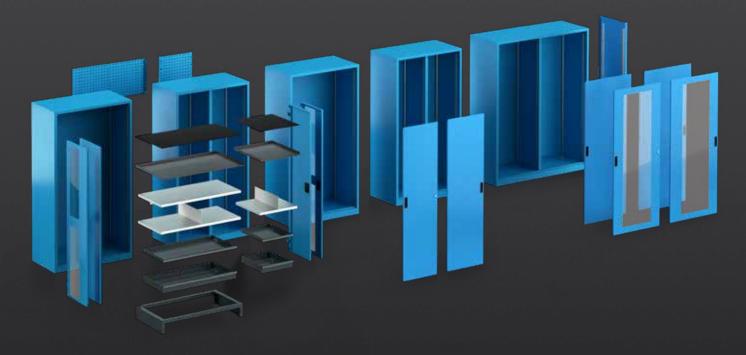


L1006 UNIVERSAL SHELVING

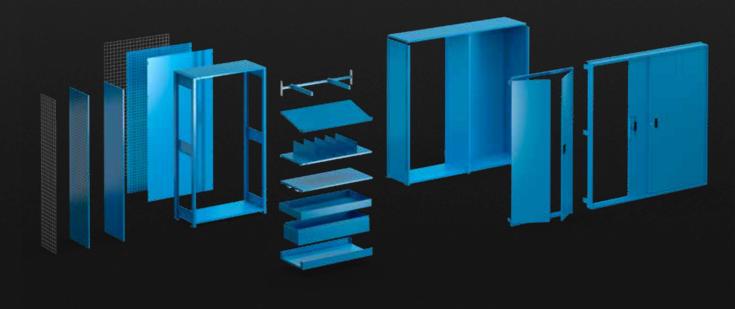

OPTIMISE YOUR WORKSPACE WITH LISTA

From the favourite colour to the perfect drawer partition: delivering the best product for you is important to us. That's why LISTA offers you free choice in almost all areas. Our surfaces, for example, are available as an ESD version or with an antibacterial coating in addition to the individual colour preference. You will

also receive multi-level locking solutions, up to fully automatic access control, as required. Not to mention comprehensive partition material, accessories and, last but not least, attractive extras such as our EDGE design cabinet.

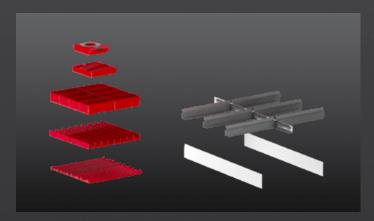

Comprehensive partition material

Plastic boxes, troughs, anti-slide mats, dividers and more: the right partition material brings order to your LISTA drawers and also ensures more efficient workflows and increased productivity. See p. 248.



Smart accessories

Accessories such as hooks, lights or desk chairs complete your LISTA system. Design each workstation ergonomically and precisely to suit your individual requirements. See p. 162.



Free choice of colours

Twelve standard colours, six colour combinations, all other colours available. LISTA also provides you with the exact visual solution that suits you. Discover the possibilities. See p. 22.



Variable locking systems

LISTA provides you with the optimum locking system for your requirements, from standard locking systems with replaceable cylinders to fully electronic control systems. See p. 28.

You can also find further information in our LOCKING SYSTEMS brochure.



Electronic access control

With our electronically controlled access system LISTA E-Control, you can protect valuable and important stored goods particularly securely and efficiently. See p. 32.

For more information, see our ACCESS CONTROL SYSTEMS brochure.



ESD solutions

Your LISTA workspace equipment is also available as an ESD version to protect sensitive components from electrostatic discharge. See p. 24.

Further information can be found in our ESD SOLUTIONS brochure.



Antibacterial surface

Infection control included: LISTA solutions are also available with an antibacterial surface coating for medical areas and others requiring increased hygiene.

More information can be found in our HEALTHCARE SOLUTIONS brochure.



EDGE statement light

EDGE, the LISTA designer cabinet with LED light signature, shines your workspace in a new light. Exciting. Different. State-of-the-art. See p. 34.

Further information can be found in our EDGE brochure.

THE LISTA PROMISE

Actually, it is very simple: we want you to be satisfied with your LISTA solution. That's why we focus on you as a customer in everything we do. For our products, this means: we manufacture in first-class quality with a long-term quarantee and responsibility

for the future. In this way, you can be sure that LISTA will not only provide you with a high-quality and durable solution, but also a sustainably produced solution.



TOP INDUSTRIAL QUALITY

LISTA products meet the very highest standards of quality. They are robust, made of top-quality materials and manufactured with first-class workmanship. That is why we offer a 10-year guarantee for our products. This is unique in the industry, but that's not all that LISTA customers can rely on. LISTA solutions have been awarded myriad international certifications, so they can be used worldwide. What's more, they'll still be in use years and decades from now: in addition to the very best industrial quality, we also guarantee subsequent deliveries of your product over a long period of time.



THE HIGHEST MANUFACTURING STANDARDS

We aim to provide the LISTA system with a consistently high level of quality. We therefore manufacture our products exclusively in Switzerland and Germany. State-of-the-art manufacturing technology and ongoing investment and innovation in our production processes ensure superb results. This has made LISTA a byword for reliability and security as a partner for storage and operating equipment for over 75 years.



QUALITY MANAGEMENT

We set ourselves realistic goals and review them on an ongoing basis in order to be able to improve our competitiveness and performance in a sustainable way, and thereby increase customer satisfaction. Our quality and environmental management system meets all of the requirements of the international ISO 9001:2015 and ISO 14001:2015 standards. As far as we are concerned, quality begins with our workforce, so we also have ISO 45001:2018 certification.













ENVIRONMENTAL PROTECTION

Environmental protection is an integral part of our corporate culture. We are committed to sustainable climate protection out of genuine conviction. By voluntarily participating in the Energy Agency for Business scheme, LISTA is committed to actively reducing CO2 emissions and optimising energy efficiency.





SUSTAINABILITY

Environmental awareness and sustainability are integrated right from the very development of our products and carried across into all of the subsequent processes. This runs all the way through, from the procurement of raw materials to production and distribution, and finally the long-term use of our cabinets, shelving and other solutions. One reason why we are able to do this is that we mainly use steel as a material. In addition to robustness and durability, the fact that steel can be 100 per cent recycled is another convincing argument in favour of its use.



SERVICE FROM A SINGLE SOURCE

You can order your LISTA product quickly and easily from the catalogue or configure it online. And it's just as easy if you have any questions or need technical support. Contact LISTA

Service and you will also receive a tailor-made solution from consultation to customer service. Training included.

All contact addresses can be found on p. 270 and online at: About LISTA > Contact







ADVICE, PLANNING AND VISUALISATION

Is your project bigger and more extensive? Then we will be happy to advise you personally, work with you to analyse your individual needs and visualise your new furniture system with the aid of our planning software.



SPARE PARTS

You can obtain the right replacement parts in original LISTA quality for each of our products.



INDIVIDUAL ENGINEERING

Do you have any special requirements for your operating equipment? Do you require special technical features, special sizes or a company-specific design? If so, we're happy to help by offering our individual engineering service. You can rely on our many years of experience in planning, manufacturing and assembling customer-specific solutions. Even complex projects and ambitious tasks are in the best hands with LISTA.



CUSTOMER SERVICE

For technical queries, simply get in touch with our customer service team. They will provide expert advice and can also come to you if necessary.



REPAIRS

Do you need a LISTA product to be repaired? Our experts will ensure that your solution is working again as quickly as possible, as you can expect from LISTA.

LISTA After Sales can best be reached via the contact form on the Internet at: Services > After Sales



INSTALLATION

Your LISTA solution is assembled by skilled technicians. They install the system on site and can also train your employees if necessary. This ensures that the equipment can be put into operation smoothly and also guarantees the successful use of our products over the long term.



TRAINING

Whether you need to know more about products or customer applications, general background information or practical assembly instructions, at the LISTA Workspace Academy we offer specialist training on the topics that really interest you.

Course overview and registration can be found online: www.lista-academy.com




AFTER SALES

After installation and setup, our experienced staff are available to help you with advice and assistance at any time.

REFERENCES

With LISTA you are in good company. More than 100 000 prestigious companies around the world trust our solutions. Covering a cross-section of industries and sizes, from ABB to the Zurich

University of Applied Sciences. Take a look at our customer list. And if you want to be included: just contact us and ask.

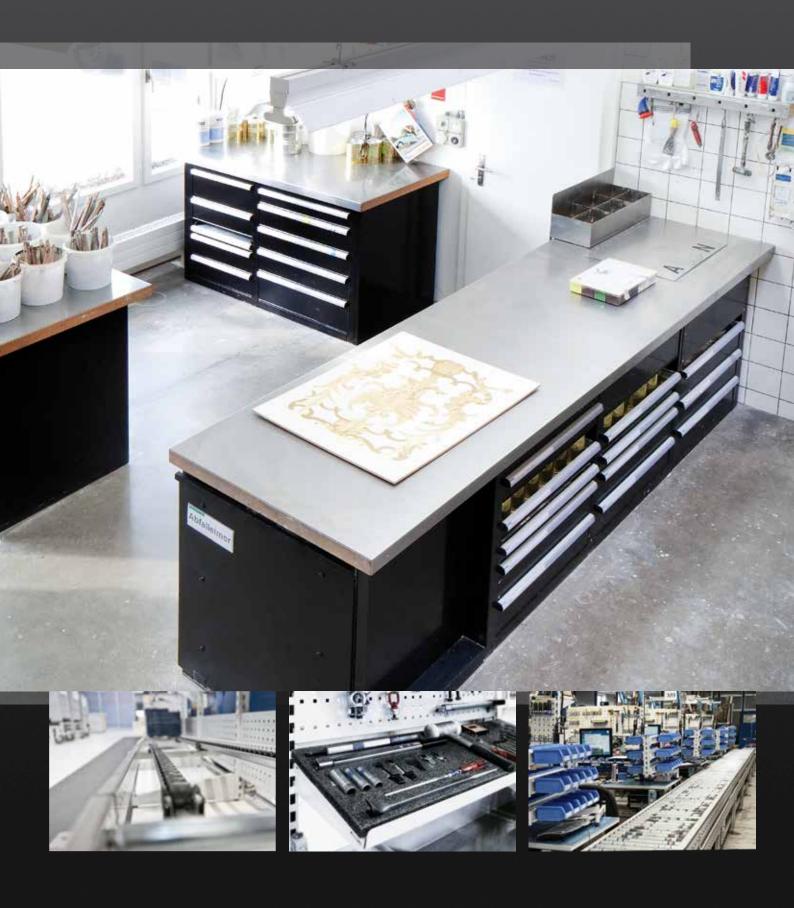





Automotive

Audi, BMW, Bugatti, Chrysler, Citroën, Continental, Daimler, Dallara, Ferrari, Ford, Lamborghini, Magna, MAN, Maserati, McLaren, Mercedes-Benz, Opel, Peugeot, Porsche, Renault, Rolls-Royce, Toyota, Volvo, VW

Banking and administration

Credit Suisse, Deutsche Bank, ÖNB, PWC Sanitas, UBS

Careers, education and leisure

BFI Vocational Training Centre Steiermark, HBLA for Forestry Management, OTT-Jakob Spanntechnik, swimming pools and sports grounds, Waldrich Coburg

Fire brigades and police

Professional fire brigade, fireproofing service, voluntary fire brigade

Healthcare

Baxter, Bayer, Berlin-Chemie, Biotronik, Caritas, German Red Cross, Evonik Industries, Klosterfrau Healthcare Group, Merck, Novartis, Rega, Roche, Spitex, Synthes, Takeda









Aviation

Airberlin, Airbus, Air France, Austrian, Eurocopter, KLM, Lufthansa, MTU Aero Engines, Qatar Airways, Rega, Singapore Airlines, Swiss

Mechanical engineering

ABB, Benteler Automotive, Bühler, Getrag, Heidelberg, Schaeffler Group, Siemens, ThyssenKrupp

Metalworking

Cameron, Danieli, Georg Fischer, Hein & Oetting Feinwerktechnik Oerlikon, ThyssenKrupp

Motor sport

Sauber F1, McLaren F1, Ferrari F1, Red Bull F1

Museums

Birmingham Museums and Art Gallery, British Museum, Christie's Education, Vienna Museum of Art History, Muséum National d'Histoire Naturelle, Museum of London, Stiftung Stadtmuseum Berlin, Verkehrshaus der Schweiz



















Public transport

Alstom, BUG Verkehrsbau AG, DB, KCRC Hong Kong, RATP Paris, SBB, Stadler Rail, VBZ Zurich

Schools and universities

ETH, University of Cambridge, University of Manchester, Hochschule der Künste, Hochschule Rapperswil, RWTH Aachen, Zurich University of Applied Sciences

Watches, jewellery, coins

Cartier, Chopard Genève, Glashütte, IWC, Louis Vuitton, Patek Philippe Genève, Pro Aurum, Richemont, Rolex, Swarovski, Swatch

Maintenance and repair

AMAG, Galliker, auto workshops, PSA Group, Porsche, Re Steel

Defence and security

Alenia Aermacchi, Austrian Federal Army, German Federal Army, Eurocopter, Forsvaret, Dutch Royal Air Force, Krauss Maffei, Rheinmetall, RUAG, U.S.

Tool manufacturers

BOSCH, D'Andrea, Fehlmann, Gerardi, Hella, Hilti, Kintek, Leitz, Precitool, Sandvik, SECO, Stahlwille, Stihl, Walter



Free choice of colours

COLOUR YOUR WORKSPACE

The LISTA storage and workspace equipment is available in twelve standard colours, twelve further predefined colour variants and, on request, in any colour and colour combination. This allows you to design each workstation completely flexibly and individually. Different colours for different work areas, coloured accents to increase clarity or complete company facilities in the corporate design: it's all possible. You can find an overview of our colours and colour codes on the fold-out pages at the end.



YOU SET THE TREND

Do you have a special colour preference? No problem: LISTA solutions are available in any trend colour of your choice. Here are some examples that we have implemented for our customers:



Standard colours



Pale blue RAL 5012



Ruby red RAL 3003



Light grey RAL 7035



Dove grey NCS S 4502-B



Reseda green RAL 6011



Gentian blue RAL 5010



Capri blue RAL 5019



RAL 5005

.050

Metallic grey NCS S 6502-B



RAL 9010

.060

Black NCS S 9000-N



An additional 12 predefined colours*



Grey aluminium RAL 9007



Brilliant blue RAL 5007



White aluminium RAL 9006



Turquoise blue RAL 5018



Pale grey NCS S 2000-N



Pebble grey RAL 7032



Ultramarine blue RAL 5002



Flame red RAL 3000



Grey white RAL 9002



Slate grey RAL 7015




Sky blue RAL 5015




Orange RAL 2004

www.lista.com

^{*12} other predefined colours are available at extra cost.

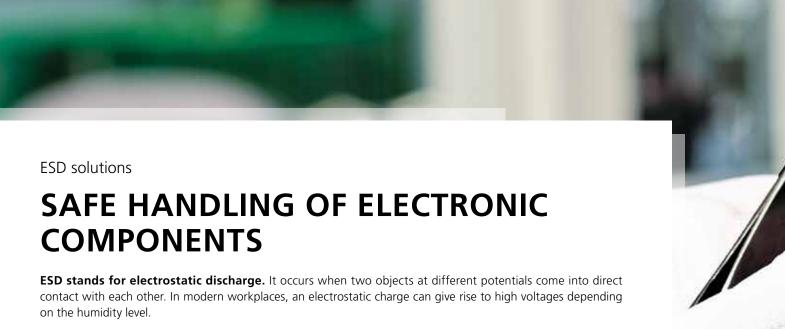

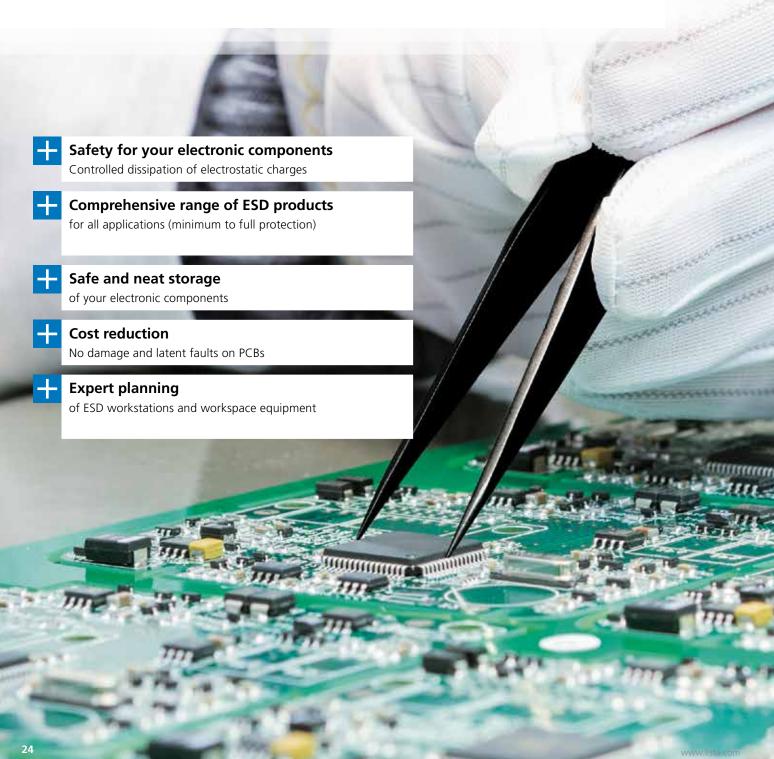





WHEN IS ESD DANGEROUS OR HARMFUL?

It often goes unnoticed by people due to its low energy. However, even very small electrical discharges can quickly damage electronic components or lead to a hidden defect. If damage caused by ESD is noticed too late, high repair or replacement costs can result. Worse than the financial damage is the additional subsequent damage to reputation if, for example, a complete product batch is affected, which can, in turn, lead to a loss of customers

The general rule therefore is:

"Where there is no charge, there is no discharge."

ESD-safe equipment for handling ESD-sensitive components reduces the risk of static discharge to a minimum. This requires a comprehensive protection concept.



Warning symbol for ESD-sensitive components.



ESD protection components

THE COMPREHENSIVE ESD WORK PROGRAMME FROM LISTA


In order to avoid high costs, LISTA offers a complete ESD planning and implementation service – from advice to installation. LISTA has combined years of experience in workstation development with a sound knowledge of ESD problems and developed a comprehensive ESD workstation programme: all painted surfaces feature a colour coating designed by LISTA that dissipates charges and prevents electrostatic discharge.



IMPORTANT!

All ESD protection zones must be checked regularly!


CONFIGURE AND ORDER ESD ZONES INDIVIDUALLY

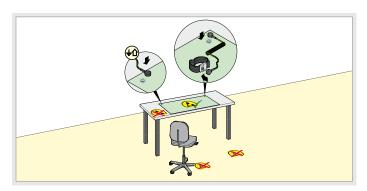



Minimum ESD protection


Dissipative table mat with wrist strap

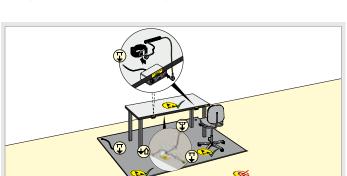

C Version C

ESD isolated solution


- Dissipative table top with wrist strap
- Dissipative desk chair
- Dissipative floor mat

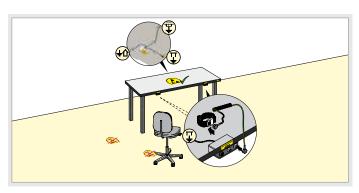

B Version B

Standard ESD protection

Dissipative table top with wrist strap

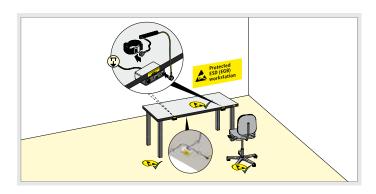

D Version D

ESD protection zone

- Dissipative table top with wrist strap
- Dissipative desk chair
- Dissipative base plate

A COMPREHENSIVE ESD PROTECTION ZONE INCLUDES THE FOLLOWING **AREAS:**





Workstations

The perfect ESD workstation is ergonomically adaptable and ESD protected. Electrostatic charges are dissipated in a controlled manner via the working surface and grounding cable so that the workstation stays charge-neutral.



Personnel grounding

People are a primary source of electrostatic charges. Wrist strap with grounding cable and shoes are therefore recommended for people working in an electronics manufacturing environment. Desk chairs or stand-up seats should also have ESD protection.



Electronic components are best stored in closed ESD drawers or hingeddoor cabinets as well as ESD shelving (Faraday cage) with appropriate ESD containers.



Markings

ESD-protected areas must be marked. Signs or additional labels should be used to warn of ESD-sensitive components.




>>> see ESD catalogue




HOW ARE COMPANIES AFFECTED BY ESD?

"They work on components without knowing whether or not these components can be damaged during production." Checklist for the equipment and maintenance of ESD protection zones to comply with the following ESD basic principles: "Where there is no charge, there is no discharge."

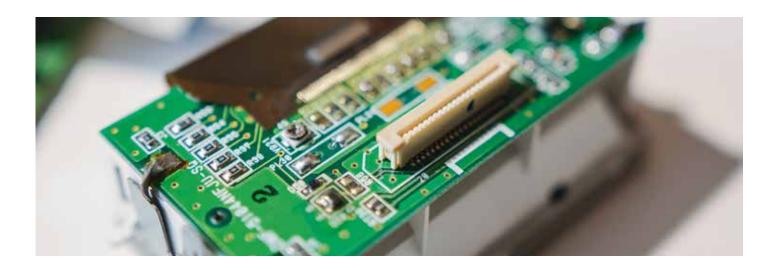

ESD CHECKLIST FOR COMPANIES

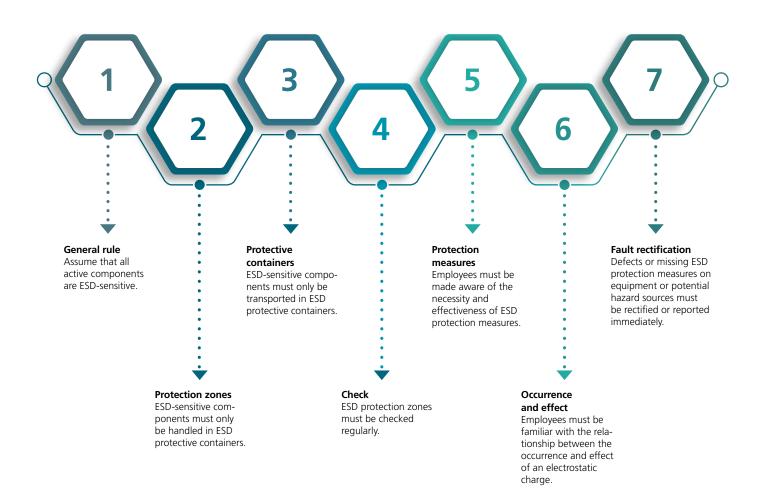





OVERVIEW OF LISTA ACCESS SOLUTIONS



KEY LOCK

Proven standard locking system

KEY Lock, our standard locking system with replaceable cylinders.

- manual opening/locking with key
- simultaneously lockable for multiple, as well as different, products with only one key or separately lockable with several keys
- key availability guaranteed for years



CODE LOCK

The solution with number combination

When locking with CODE Lock, the key is replaced by a number combination. A simple four to six-digit code is all that is needed to open the product.

- manual opening/locking with number code
- lock readout and programming with LISTA Access software (option)







RFID LOCK

Ready for the future: The solution with RFID badge

In addition to the CODE Lock, the LISTA RFID Lock enables opening and locking via standard radio-frequency identification (RFID). It consists of a transponder in the lock and standard mobile RFID badges/cards/tags.

- manual opening/locking via RFID badge or number code
- most standard RFID badges/cards/tags can be used
- lock readout and programming with LISTA Access software (option)



AUTO LOCK

The ultimate solution: Automatic opening and locking

The LISTA AUTO Lock features the same functionality as our RFID Lock, however opening and locking take place automatically. With LISTA Access software (option), time profiles can also be programmed in the lock or on the user for time-limited access for increased security.

- automatic opening/locking via RFID badge or number code
- most standard RFID badges/cards/tags can be used
- locks automatically after a preset time or at the push of a button
- lock readout and programming with LISTA Access software (option)
- time-limited access programmable via LISTA Access software (option)





LISTA LOCKING SYSTEMS IN A DIRECT COMPARISON

	KEY Lock	12 3 - CODE Lock	RFID Lock	6 AUTO Lock
MANUAL ACCESS				
Key	+			
Do not exceed max. number of different cylinders	as many as you like			
Do not exceed max. number of locks:	as many as you like			
ELECTRONIC ACCESS				
Code		+	+	+
Do not exceed max. number of user codes		100	100	100
RFID			+	+
Do not exceed max. number of locks:		as many as you like	as many as you like	as many as you like
Automatic opening/locking				+
MANAGEMENT				
Lock ID Code		+	+	+
LISTA Access software		+	+	+
INTERFACES				
Free contact for external systems			+	+

EXTENSIVE ACCESSORIES FOR OUR LOCKING SYSTEMS



Basic set

- 1 AC/DC adapter (12W/5V) 1 Combi-lock connection,
- complete 1 Assembly instructions
- 4 Cable ties

Art. no. 19.160.000



Expansion set

- 1 Combi-lock connection, complete
- 1 Connection cable, 2 m 4 Cable ties

Art. no. **19.161.000**



Extension cord set

1 Connection cable, 2 m (one set is required per two metres)

Art. no. **19.162.000**



Program badges Set of 5, colour: white Art. no. 19.581.000



User badges Set of 5, colour: blue Art. no. **19.580.000**



RFID card reader for PC Art. no. 19.591.000



Security eCard 2 items Art. no. **19.579.000**



When ordering a **LISTA product** with electronic lock, please add the suffix of the relevant lock type/locking type (.C, .F or .A) to the article number from the table (e.g. **71.088**. XXX.C).

Order example for drawer cabinet with:

CODE Lock = 71.088.XXX**.C RFID Lock** = 71.088.XXX.**F AUTO Lock** = 71.088.XXX.**A**



FULL CONTROL WITH LISTA ACCESS



with the LISTA Access software, you have a particularly easy and user-friendly solution for managing and configuring your LISTA CODE, RFID or AUTO Lock. I enables faster learning and management of the lock, users and user groups via USB. Other additional functions are also available such as changing the lock ID code or creating summary assignment tables (permissions).

System requirements

Operating system: Windows 7 or higher

CPU: Intel Atom or similar (recommended Intel i3 or higher)

RAM: 2 GB (recommended 4 GB)

Free hard disk space: 500 MB (recommended 1 GB)


Functions

- Lock training and management
- User management
- Group classification
- Assignment table (permissions)
- Synchronisation of lock and database via USB



LISTA Access software Art. no. 19.590.000



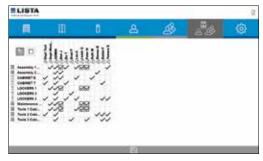

Further information and downloads at: **www.lista.com/locks**

31

LISTA Electronic Control

SECURITY AT ALL LEVELS

The electronically controlled access system LISTA Electronic Control gives you maximum flexibility to allocate and manage access rights. This means that you can not only control access to the entire cabinet, individual drawers or the drawer compartments developed specially for this system but can also combine different system versions in a single cabinet. Just as required.





THE MODULAR SYSTEM FOR INTERNAL LOGISTICS SOLUTIONS

Level 1 Security



Access control at cabinet level

LCC - LISTA Cabinet Control

Electronically controlled access to the entire cabinet. Available for sizes $36 \times 36 \times (717 \times 725 \text{ mm})$ $54 \times 36 \times (1023 \times 725 \text{ mm})$

Level 2 Security

>>

Access control at drawer level

LDC - LISTA Drawer Control

Electronically controlled access to specific individual drawers. Available for sizes $36 \times 36 \times (717 \times 725 \text{ mm})$ $54 \times 36 \times (1023 \times 725 \text{ mm})$


Level 3 Security





Access control at compartment level

LPC - LISTA Parts Control

Electronically controlled access to specific drawer compartments. Available for sizes $36 \times 36 \times (717 \times 725 \text{ mm})$

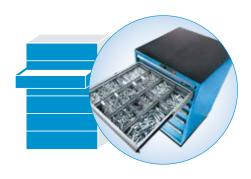



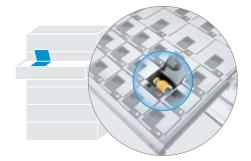

eCONTROL





Don't search, find

LISTA eControl provides you with a tailor-made software solution for the storage and access management of your LISTA products. The software ensures optimal management so that you can access the desired product with as few steps as possible. eControl is simple, self-explanatory and event-controlled, so withdrawals are also possible without prior entry. The solution can optionally be integrated into your existing ERP system via an interface and – in addition to full transparency and time-saving withdrawal – also enables comprehensive controlling based on data and evaluations.





LISTA Electronic Control is available either as a complete system consisting of hardware and software or as hardware only to enable you to use your own software.

LISTA EDGE

GET THE LOOK

More form for your workspace: Discover EDGE, the new LISTA design cabinet with LED technology. The ultimate eye-catcher is available in two variants and different dimensions. Look forward to an individual statement light in the workshop, sales room, studio and office.









- Vertical light strip along the cabinet front left and right
- Geometrical, uniform overall appearance
- Colour white
- Available in cabinet height 850 mm (other versions on request)






Form to the point: EDGE DOTS


- Individually controlled LED elements on the handle corners
- Technologically dynamic radiance
- Available in four colours (with optional myDOTS software package, colour mixing and intensity can be individually adjusted)
- Available in cabinet heights of 700, 800, 850, 1000, 1150, 1450 mm (other versions on request)

EDGE STATEMENT LIGHT: HIGHLIGHTS



Expressive accentuation

+ High-quality radiance




Different lighting moods

Sustainable LED technology

Material flow

OPTIMUM PROCESSES

Workspace equipment is important for efficient workflows in your business. LISTA therefore offers you a wide range of storage and workstation systems that can be optimally adapted to your workflow and combined into a process-optimised solution. LISTA systems include storage solutions from universal shelving to warehouse lifts, the individually configurable workstation system, linking options, workbenches and mobile solutions. LISTA also provides driverless transport systems for the automated transport of goods and materials within the company. All in all: the best conditions for optimising your material flow.

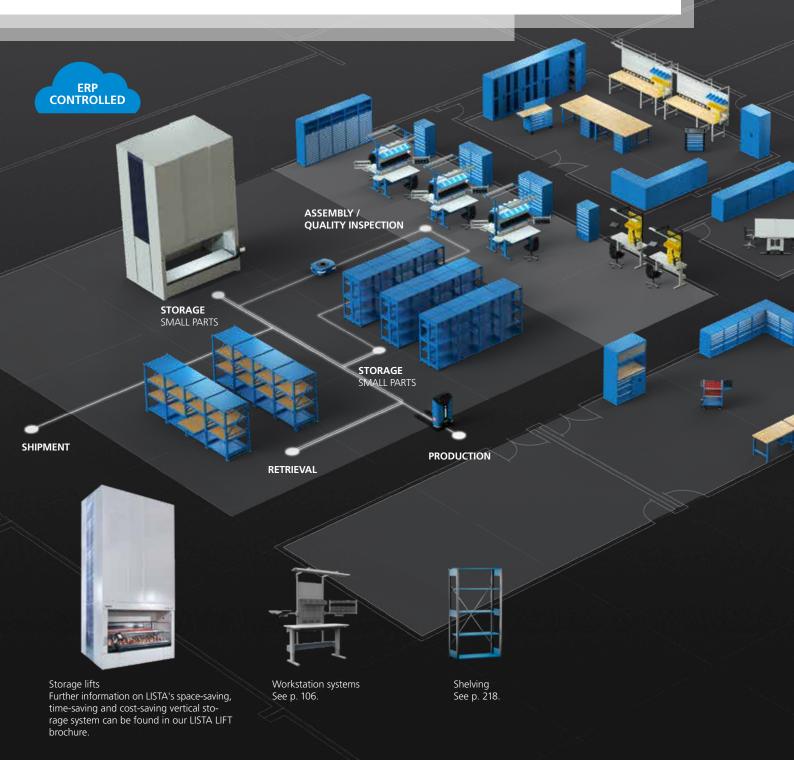





LISTA SLIM

LISTA SLIM provides you with a particularly efficient solution for your intralogistics. The system offers a high loading capacity with low unladen weight. The lifting height can be adjusted up to 3 m depending on the lifting capacity. At the same time, 360° collision protection, millimetre-accurate navigation and the automatic charging function ensure maximum safety and reliability.



LISTA FLOW

Its technical features and high functionality make the FLOW series one of the leading AGVs for loading capacities up to 1000 kg. Thanks to its combined navigation with laser/QR, it achieves optimum accuracy with the highest possible safety and efficiency.



Belt



Heavy Carrier



Castors







OTHER AGV SOLUTIONS

In addition to vehicles for automated material flow in industrial environments, driverless transport systems for picking and sorting supplement the LISTA AGV range. This gives you the right solution for a wide range of applications, such as retail or shipping, from vertical pickers to manoeuvrable small sorters.

YOUR ADVANTAGES WITH DRIVERLESS TRANSPORT SYSTEMS

+

Automated product movement



Fast storage and retrieval



Decreasing error rate



Reduced product damage

+

Reduced labour requirements



Greater flexibility in the warehouse



Improved safety at the workstation



Exceptional value for money

ROBUST ALL-ROUNDERS

LISTA drawer cabinets provide a robust and well protected storage option for equipment and many other items. High-quality specifications and a variety of individual configuration options make these robust all-rounders ideal for a wide variety of requirements and environments. Their special design guarantees optimum space utilisation. In addition, housing and drawers can be variably partitioned, intelligently labelled, protected with access control and finished in almost any colour. Nowhere else will you find this degree of flexibility.







can be utilised to the full
since drawers can be fully extended and the drawer
shell heights are optimised

Well protected

against dirt, liquids and mechanical load through
closed housing with impact and abrasion-resistant
surface

Outstanding safety features safety catch to prevent unwanted drawer opening and anti-tilt mechanism to prevent opening of more than one drawer at a time

Corrosion protection
 with electrophoretic dip painting and environmentally friendly powder coating

Optimum order and organisation
thanks to special LISTA partition material for every
purpose and perforated, slotted drawers

Professional labelling
with LISTA Script labelling software and clip-on label holders which fold upwards

Perfectly smooth running
through differential pull-out without a crossbar

The state of the s

Secure locking option
with interchangeable cylinder for adaptation
to existing locking systems and electronic locking
systems via CODE, RFID or AUTO Lock


Fully compatible with LISTA partition material thanks to the standardised unit of measure see p. 248



Drawer cabinets



Haximum use of drawer space



Optimum shell height

- drawer sides and rear panels the same height as the fronts
- maximum use of vertical space
- optimum protection against items falling out and loss of stored items



Full extension

- maximum use of horizontal space
- everything in view
- optimum access



Pull-out without crossbar

- perfectly smooth running and ease of movement through differential pull-out without a crossbar
- enables the drawer to be fully extended



Quiet locking tab

- special plastic cover in the locking tab
- smooth and quiet locking process

Professional labelling



Label holder which folds upwards

- on drawers, troughs, metal dividers, separators and housing
- for easy, clean and protected labelling



LISTA Script

The LISTA Script labelling software offers:

- numerous labelling options
- pictograms
- barcode generator

As a LISTA customer, you can download our LISTA Script labelling software free of charge from our website under Products > Accessories > LISTA Script.

■ Partition material for every purpose



The LISTA standard

Our drawer partition materials are standardised and therefore compatible with the entire LISTA range.

>>> Drawer partition material see p. 248

LISTA Script slide-in labels see p. 268



Benefits of LISTA storage systems

Storage in drawers

Storing small parts in drawers rather than on shelves ensures that stored items are protected from dust and contamination while saving space and optimising organisation. The entire contents of the drawer are visible in no time, whereas with a shelf, items may have to be moved or reached over to gain access.

- The depth of a compartment can be adapted to suit the stored items at any time, and any number of parts can be placed one behind the other
- By simply pulling out the drawer, you can clearly see the contents and have everything within reach in a truly space-saving way

∓ Ex

Example of space requirement

Usable depth $4 \times 600 = 2400 \text{ mm}$ Depth of aisle $2 \times 1000 = 2000 \text{ mm}$ Total 4400 mm


Storage on shelves

- If the parts are smaller than the depth of the shelves, there is a lot of unused space behind the goods
- If the items are stored behind one another, then space is needed for both visibility and access



Example of space requirement

Usable depth $8 \times 300 = 2400 \text{ mm}$ Depth of aisle $4 \times 800 = 3200 \text{ mm}$ Total 5600 mm

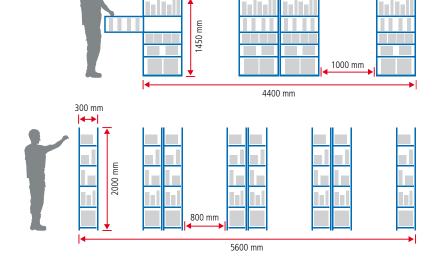

600 mm

Optimum order and organisation



Plastic boxes and troughs for small and cylindrical items



Tool holders for NC storage



Metal separators for different sized parts



PE foam inserts for special and measuring tools



Perforated, slotted drawers hold items firmly in place


- a series of slots around the drawer walls hold the partitioning material firmly in place
- perforated drawer bases enable slotted dividers, metal separators, dividers, holding pins or milling cutter holders to be optionally screwed in place

41

		Depth 27 E			Depth 36 E						
LISTA Units	18×27 E	27×27 E	36×27 E	54×27 E	18×36 E	27×36 E	36×36 E	45×36 E	54×36 E	64×36 E	78×36 E
Cabinet floor area mm	411×572	564×572	717×572	1023 × 572	411×725	564×725	717×725	870×725	1023 × 725	1193×725	1431×725
Drawer	306×459	459×459	612×459	918×459	306×612	459×612	612×612	765×612	918×612	1088×612	1326×612

www.lista.com

Flexibly adaptable



Variable raised edges

- raised edges on three sides of stationary cabinets for simple and easy cleaning
- raised edges on four sides of mobile cabinets to protect the goods being transported



Punch out

- housing covers with pre-perforated holes which can be punched out
- for retrofitting with a table top or second drawer cabinet on top



Base/forklift base

- optional base and forklift base (for drawer cabinets with a width of 36 E and over)
- makes it easy to adjust the height of the drawer cabinet
- enables the loaded cabinet to be lifted and moved with a forklift truck




Mobile cabinets

Our mobile cabinets are supplied with:

- raised edges on all four sides and push-bar
- black ribbed mat
- two swivel castors with brakes
- two fixed castors and single-drawer locking mechanism

Stationary cabinets can be converted to mobile cabinets at any time.

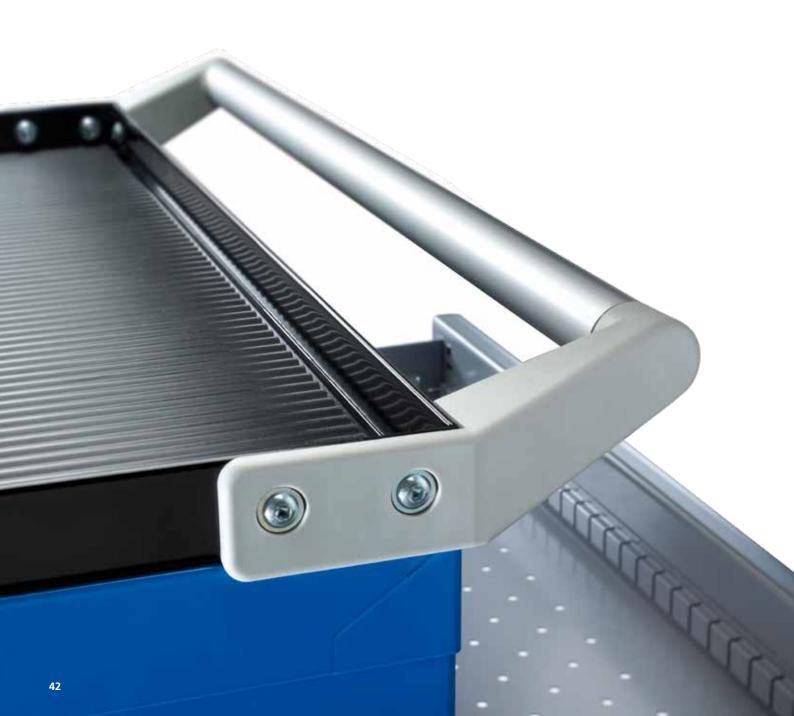



Individual configuration options

As standard, LISTA drawer cabinets are available in seven different widths, two depths and a variety of heights. The configuration options in terms of size, equipment, locking system, colour and drawer partitions are almost unlimited.

Our drawer cabinets can be combined individually to suit any working environment in order to make maximum use of available space. They can be extended at any time and therefore offer a scaleable solution tailored to your needs.

Typical configurations



Configuration as a drawer cabinet



Configuration as a drawer cabinet with recessed hinged door, pull-out shelves and adjustable shelves



Configuration as a drawer cabinet with drawers, recessed hinged door, pull-out shelves and adjustable shelves



Configuration as a mobile drawer cabinet with raised edges and a push-bar



Toolbox: Drawer cabinet with combined drawer widths (64/36/18 E). Version: stationary or mobile



ESD version available on request

Outstanding safety features



Single drawer opening as standard

- prevents the cabinet from tipping over by blocking all other drawers when one drawer is pulled out
- allows for drawers to be moved around into a different arrangement at any time



Flush drawer front

- drawer handles with side covers which sit snugly within the front profile
- look good and are safe



Safety catches

- comply with all regulations against drawers accidentally falling out of cabinets
- reduce the risk of injuries at the workplace
- can easily be deactivated in order to move individual drawers



Information on load capacity

- the load capacity (75 or 200 kg) is inscribed on the drawer runners
- increased safety

Extra safety for stationary and mobile cabinets



Safety catch on right

- our standard safety catch for all mobile cabinets
- can be operated with one hand



Single safety catch on the right and left

- especially suitable for mobile equipment
- both hands are needed to operate them



Double safety catch


- has all the same features as the single safety catch on the left and the right
- easier to use since it can be operated with one hand



Lilo locking device

- with external lever for fixing the fully laden drawer in either open or closed position
- for a drawer load capacity of 200 kg

Countless configuration options

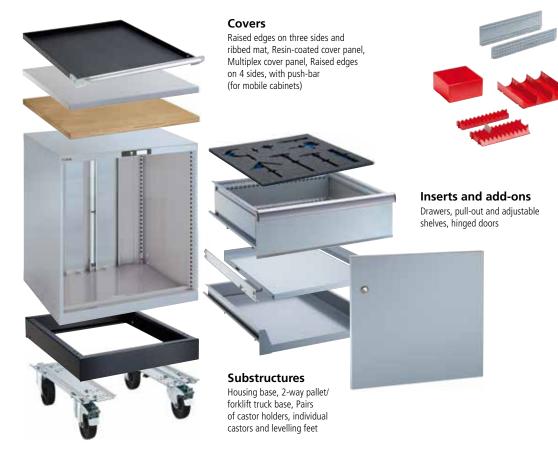

Partition material

Slotted dividers, separators, trough walls, metal separators, label holders, plastic boxes and trough separators, milling cutter holders and holding pins, non-slip mats, foam inserts and much more.




Locking systemsKEY Lock, CODE Lock, RFID Lock
or AUTO Lock

Order preconfigured models



... or configure and order cabinets individually

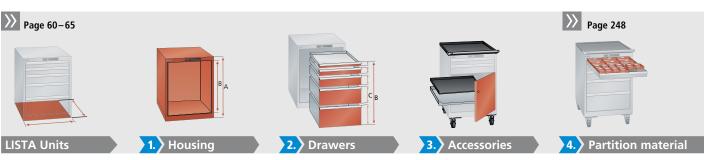

- select the cabinet floor area
 (e. g. 717 × 572 mm = 36 × 27 E
 or 717 × 725 mm = 36 × 36 E)
- LISTA Unit E × E = a unit of measure which helps to choose drawers and partition materials
- choice of various housing heights (A)
- the choice of housing always includes the choice of the preferred locking system and the colour
- define the height of the front, the load capacity, the colour and the type of safety catch
- sum of the drawer front heights (C) = clear height (B) (see diagram)
- can be equipped with drawers and doors
- select the cabinet accessoriesmobile cabinets must have
- mobile cabinets must have a drawer safety catch and a push-bar
- select the partition material for the drawers
- N.B.: take the drawer height and usable surface into account!

44



12 standard colours

Maximum flexibility thanks to free choice of colours

All products with a choice of colours are available in 12 standard colours and 6 colour combinations without surcharge. The three-digit colour code (e.g. .010) forms part of the article number. When ordering, please complete the article number by adding the desired three-digit colour code (e.g. 70.701.010). Housings and drawers can also be ordered in different colours.







.020 Light grey RAL 7035



.030 Reseda green RAL 6011



.040 Capri blue RAL 5019



.050 Metallic grey NCS S 6502-B



.060 Black NCS S 9000-N







.080 Pigeon grey NCS S 4502-B



.090 Gentian violet RAL 5010







.110 Pure white RAL 9010



Anthracite grey RAL 7016

6 colour combinations



Light grey RAL 7035 Light blue RAL 5012



Light grey
RAL 7035
Signal blue
RAL 5005



Light grey
RAL 7035
Metallic grey
NCS S 6502-B



Metallic grey
NCS S 6502-B
Light grey
RAL 7035



Light grey
RAL 7035
Ruby red
RAL 3003




Ruby red
RAL 3003
Metallic grey
NCS S 6502-B

An additional 12 predefined colours

(at extra cost)

















.230 Pebble grey RAL 7032







Your individual choice of colour on request

LISTA is able to deliver any individual colour on request. In addition to the existing standard and predefined colours, it is also possible to produce your desired product in any colour you choose on request.



Due to the printing process, these colour samples may deviate from the original colours.







Art. no. **78.423.070.C** Ruby red, RAL 3003 (excluding partition material)

Mobile cabinets

All mobile drawer cabinets on these two pages are equipped with:

- 1 raised edge on 4 sides and ribbed mat,
- 1 push-bar, 1 pair castor holders with nylon castors Ø 100 mm, Drawer safety catch on right, Load capacity 400 kg

E W-	411 mm D 7	572	mm	
×459 mm H ↑	Number of drawers mm	kg		Art. no. 🔲
283	2 : 1×50/1×150	75	KEY Lock	78.400.XXX
283	2 : 2×100	75	KEY Lock	78.402.XXX
283	3 : 1 × 50 / 2 × 75	75	KEY Lock	78.404.XXX
383	3 : 1 × 50 / 1 × 100 / 1 × 150	75	KEY Lock	78.406.XXX
383	3 : 2 × 75 / 1 × 150	75	KEY Lock	78.408.XXX
383	4 : 1×50 / 2×75 / 1×100	75	KEY Lock	78.410.XXX
533	4 : 1×50 / 1×100 / 2×150	75	KEY Lock	78.414.XXX
700	3 : 1 × 100 / 1 × 200 / 1 × 300	75	KEY Lock	78.418.XXX
700	5 : 2 × 75 / 3 × 150	75	KEY Lock	78.420.XXX
723	4 : 1 × 50 / 1 × 100 / 2 × 150	75	KEY Lock	78.423.XXX
723	5 : 2 × 50 / 2 × 100 / 1 × 150	75	KEY Lock	78.425.XXX
840	6 : 2 × 50 / 2 × 75 / 2 × 150	75	KEY Lock	78.427.XXX






a = locking system



459×459 mm









383	2 : 1 × 100 / 1 × 200	75	KEY Lock	78.467.XXX
383	3 : 1 × 50 / 1 × 100 / 1 × 150	75	KEY Lock	78.469.XXX
383	4 : 1 × 50 / 2 × 75 / 1 × 100	75	KEY Lock	78.471.XXX











850	4 : 1×100 / 1×150 / 1×200 / 1×300	75	KEY Lock	79.380.XXX	
850	5 : 1×100 / 3×150 / 1×200	75	KEY Lock	14.256.XXX	S
850	6 : 2×75 / 2×100 / 2×200	75	KEY Lock	14.258.XXX	S
OEU	6:1 v 50 / 2 v 100 / 2 v 150 / 1 v 200	75	VEV Lock	70 0E2 VVV	



850	6 : 1 × 50 / 2 × 100 / 2 × 150 / 1 × 200	75	KEY Lock	78.953.XXX	
850	7 : 2 × 75 / 3 × 100 / 2 × 150	75	KEY Lock	14.252.XXX	S
850	8 : 1 × 50 / 2 × 75 / 4 × 100 / 1 × 150	75	KEY Lock	14.250.XXX	S

KEY Lock **78.489.XXX**

KEY Lock **78.491.XXX**

KEY Lock 14.247.XXX

KEY Lock 14.245.XXX



840	6 : 2 × 50 / 2 × 75 / 2 × 150	75	KEY Lock 78.493.XXX	
890	5 : 4 × 100 / 1 × 200	75	KEY Lock 14 249 XXX	

75

75



Art. no. **14.252.010** Light blue, RAL 5012 (excluding partition material)



Art. no. **14.245.020** Light grey, RAL 7035 (excluding partition material)

LISTA quick delivery range

These LISTA products in the colours light blue (.010) and light grey (.020) are available ex-works at short notice.



Light blue RAL 5012



Light grey **RAL 7035**



890

890

723 723 **4**: 1 × 50 / 1 × 75 / 1 × 125 / 1 × 200 75

5: 1 × 50 / 2 × 75 / 1 × 100 / 1 × 150

6: 1 × 50 / 2 × 75 / 2 × 100 / 1 × 200

6: 2 × 75 / 3 × 100 / 1 × 150

Drawer cabinets I stationary and mobile



36×27 E










Η <mark>↑</mark>	Number of drawers mm	kg		Art. no. 🞇
700	5 : 1 × 50 / 2 × 100 / 1 × 150 / 1 × 200	75	KEY Lock	78.556.XXX
700	5 : 2×75 / 2×100 / 1×250	75	KEY Lock	78.560.XXX
700	6 : 2×75 / 3×100 / 1×150	75	KEY Lock	78.564.XXX



850	7 : 1 × 50 / 2 × 75 / 2 × 100 / 1 × 150 / 1 × 200	75	KEY Lock	78.568.XXX
850	7 : 2×75 / 2× 100 / 2× 125 / 1×150	75	KEY Lock	78.572.XXX
850	8 : 4×75 / 3× 100 / 1×150	75	KEY Lock	78.576.XXX







Other locking systems see p. 28–31



1000	7 : 1 × 50 / 2 × 75 / 2 × 100 / 1 × 200 / 1 × 300	75	KEY Lock	78.580.XXX
1000	7 : 2 × 75 / 1 × 100 / 3 × 150 / 1 × 200	75	KEY Lock	78.584.XXX
1000	8 : 1 × 50 / 2 × 75 / 3 × 100 / 1 × 150 / 1 × 250	75	KEY Lock	78.588.XXX



957	5 : 1 × 50 / 2 × 100 / 1 × 150 / 1 × 200	75	KEY Lock	78.604.XXX
957	5 : 2 × 75 / 2 × 100 / 1 × 250	75	KEY Lock	78.608.XXX
957	6 : 2 × 75 / 3 × 100 / 1 × 150	75	KEY Lock	78.606.XXX

Mobile cabinets

All mobile drawer cabinets on these two pages are equipped with: 1 raised edge on four sides including ribbed mat, 1 push-bar, 1 pair of castor holders with rubber castors \emptyset 160 mm, single drawer safety catch on the right, load capacity 600 kg



a = locking system







Toolbox see p. 72–73 Toolbox

54 × 27 E

W → 1023 mm











ΗT	Number of drawers mm	kg		Art. no. 🔲
850	5 : 3 × 100 / 1 × 150 / 1 × 300**	75	KEY Lock	78.742.XXX
850	5 : 3 × 100 / 1 × 150 / 1 × 300	200	KEY Lock	78.744.XXX
850	6 : 2 × 75 / 2 × 100 / 1 × 150 / 1 × 250**	75	KEY Lock	78.746.XXX
850	6 : 2 × 75 / 2 × 100 / 1 × 150 / 1 × 250	200	KEY Lock	78.748.XXX
850	7 : 1×50 / 2×75 / 2×100 / 1×150 / 1×200	75	KEY Lock	78.750.XXX
850	7 : 1×50* / 2×75 / 2×100 / 1×150 / 1×200	200	KEY Lock	78.752.XXX
1000	6 : 3 × 100 / 2 × 150 / 1 × 300**	75	KEY Lock	78.754.XXX
1000	6 : 3 × 100 / 2 × 150 / 1 × 300	200	KEY Lock	78.756.XXX
1000	7 : 2 × 75 / 1 × 100 / 3 × 150 / 1 × 200	75	KEY Lock	78.758.XXX
1000	7 : 2 × 75 / 1 × 100 / 3 × 150 / 1 × 200	200	KEY Lock	78.760.XXX
1000	8 : 2 × 75 / 4 × 100 / 1 × 150 / 1 × 200	75	KEY Lock	78.762.XXX
1000	8 : 2×75 / 4×100 / 1×150 / 1×200	200	KEY Lock	78.764.XXX
1450	9 : 2×75/2×100/2×150/2×200/1×300**	75	KEY Lock	78.766.XXX
1450	9 : 2×75 / 2×100 / 2×150 / 2×200 / 1×300	200	KEY Lock	78.768.XXX
1450	10 : 2 × 75 / 3 × 100 / 2 × 150 / 3 × 200	75	KEY Lock	78.770.XXX
1450	10 : 2 × 75 / 3 × 100 / 2 × 150 / 3 × 200	200	KEY Lock	78.772.XXX
1450	11 : 2 × 75 / 5 × 100 / 2 × 150 / 2 × 200	75	KEY Lock	78.774.XXX
1450	11 : 2 × 75 / 5 × 100 / 2 × 150 / 2 × 200	200	KEY Lock	78.776.XXX
957	4 : 1 × 100 / 2 × 150 / 1 × 200	75	KEY Lock	78.778.XXX
957	5 : 2 × 75 / 1 × 100 / 1 × 150 / 1 × 200	75	KEY Lock	78.780.XXX
957	6 : 2 × 75 / 3 × 100 / 1 × 150	75	KEY Lock	78.782.XXX



Art. no. **78.770.020** Light grey, RAL 7035 (excluding partition material)

64×27 E




W → 1193 mm











6





Drawer cabinets I stationary and mobile







W → 411 mm



Art. no. 78.449.010 Light blue, RAL 5012 (excluding partition material)



Art. no. **78.439.512.C** Housing: Light grey, RAL 7035 Fronts: Ruby red, RAL 3003 (excluding partition material)

306 × 612 mm HΛ Art. no. Number of drawers mm kg **2**: $1 \times 50 / 1 \times 150$ 78.431.XXX 283 75 **KEY Lock** 283 **2**: 2 × 100 75 KEY Lock 78.433.XXX 283 **3**: $1 \times 50 / 2 \times 75$ 75 **KEY Lock** 78.435.XXX 383 **3**: 2×75 / 1×150 75 **KEY Lock** 78.437.XXX **3**: 1×50 / 1×100 / 1×150 383 75 KEY Lock 78.439.XXX **4**: 1 × 50 / 2 × 75 / 1 × 100 383 75 **KEY Lock** 78.441.XXX 700 **3**: 2×150 / 1×300 75 KEY Lock 78.447.XXX 700 **5**: 2 × 75 / 3 × 150 75 KEY Lock 78.449.XXX 723 **4**: 1 × 50 / 1 × 100 / 2 × 150 75 KEY Lock 78.453.XXX 723 **5**: 2 × 50 / 2 × 100 / 1 × 150 75 **KEY Lock** 78.455.XXX 840 **6**: 2 × 50 / 2 × 75 / 2 × 150 75 KFY Lock 78.457.XXX

D 7 725 mm



Mobile cabinets

All mobile drawer cabinets on this page are equipped with:

- 1 raised edge on 4 sides and ribbed mat,
- 1 push-bar,
- 1 pair castor holders with nylon castors Ø 100 mm, Drawer safety catch on right, Load capacity 400 kg



890

5: 2 × 75 / 3 × 150

75

For colour information see fold-out page. When ordering, please use the desired three-digit colour code (instead of XXX).

KEY Lock

78.459.XXX

18×36 E

Drawer cabinets I stationary and mobile















Η <mark>↑</mark>	Number of drawers mm	kg		Art. no. 🛚 🐫	
283	2 : 1 × 50 / 1 × 150	75	KEY Lock	78.497.XXX	
283	2 : 2×100	75	KEY Lock	78.499.XXX	

383	3 : 1 × 50 / 1 × 100 / 1 × 150	75	KEY Lock	14.437.XXX	
383	3 : 2 × 75 / 1 × 150	75	KEY Lock	78.505.XXX	

533	5 : 1 × 50 / 2 × 75 / 1 × 100 / 1 × 150	75	KEY Lock	78.511.XXX	
533	4 : 1×50 / 2×100 / 1×200	75	KEY Lock	15.009.XXX	

700	6 : $1 \times 50 / 2 \times 75 / 2 \times 100 / 1 \times 200$	75	KEY Lock	14.352.XXX	S
700	4 : 1 × 100 / 2 × 150 / 1 × 200	75	KEY Lock	14.350.XXX	S
700	5 : 2 × /5 / 1 × 100 / 1 × 150 / 1 × 200	/5	KEY LOCK	/8.518.XXX	

800	4 : 2 × 100 / 1 × 200 / 1 × 300	75	KEY Lock	14.371.XXX	S
800	5 : 1 × 50 / 2 × 100 / 1 × 150 / 1 × 300	75	KEY Lock	14.368.XXX	S
800	6 : 2 × 75 / 2 × 100 / 1 × 150 / 1 × 200	75	KEY Lock	78.522.XXX	
800	7 : 1 × 50 / 2 × 75 / 2 × 100 / 2 × 150	75	KEY Lock	14.354.XXX	S
800	7 : 2 × 75 / 4 × 100 / 1 × 150	75	KEY Lock	14.367.XXX	S
800	1: 1 × 100 + 1 door 600, right / 1 adjustable shelf / 1 pull-out shelf	75	KEY Lock	78.524.XXX	

	r aujustable sileli / r puli-out sileli				
850	4 : 3 × 150 / 1 × 300	75	KEY Lock	78.525.XXX	
850	5 : 1 × 50 / 2 × 100 / 1 × 200 / 1 × 300	75	KEY Lock	78.527.XXX	
850	6 : 1 × 75 / 3 × 100 / 1 × 125 / 1 × 250	75	KEY Lock	78.529.XXX	
850	5 : 2 × 100 / 1 × 150 / 2 × 200	75	KEY Lock	14.399.XXX	S
850	6 : 1 × 50 / 2 × 100 / 2 × 150 / 1 × 200	75	KEY Lock	14.407.XXX	S
850	7 : 1 × 50/2 × 75/2 × 100/1 × 150/1 × 200	75	KEY Lock	14.404.XXX	S
850	7 : 2 × 75 / 3 × 100 / 2 × 150	75	KEY Lock	14.405.XXX	S
850	8 : 1 × 50 / 2 × 75 / 4 × 100 / 1 × 150	75	KEY Lock	14.403.XXX	

Art. no. **14.367.519.C** Housing: Light grey, RAL 7035 Fronts: Metallic grey, NCS S 6502-B (excluding partition material)


Accessories see p. 62



Equipped with drawers and doors

Drawer cabinets can optionally be fitted with drawers and a door. Because the door is recessed, special pull-out shelves are used. As standard, the two locks have different keys. Identical locks or a CODE/RFID Lock locking system are available on request (CODE/RFID Lock is not available for doors).

LISTA








27×36 E


459×612 mm











90	5 : 2×75 / 1×100 / 1×150 / 1×200	75	KEY Lock	78.546.XXX
90	6 : 1 × 50 / 2 × 75 / 2 × 100 / 1 × 200	75	KEY Lock	78.548.XXX



990	5 : 1×50 / 2×100 / 1×150 / 1×300	75	KEY Lock	14.374.XXX	S
990	5 : 3 × 100 / 2 × 200	75	KEY Lock	14.397.XXX	
990	7 : 1 × 50 / 2 × 75 / 2 × 100 / 2 × 150	75	KEY Lock	14.372.XXX	S
990	7: 2 × 75 / 4 × 100 / 1 × 150	75	KEY Lock	14 373 XXX	ς



760	3 : 1 × 50 / 1 × 100 / 1 × 150 / 1 set of support brackets (upper)	75	KEY Lock	70.632.XXX
760	1 adjustable shelf	75	-	78.216.XXX



810	1 adjustable shelf	75	-	70.633.XXX
-----	--------------------	----	---	------------

Mobile cabinets

All mobile drawer cabinets on this page are equipped with:

- 1 raised edge on 4 sides and ribbed mat,
- 1 push-bar,


S

S

1 pair castor holders with nylon castors Ø 100 mm, Drawer safety catch on right, Load capacity 400 kg

Fronts: Ruby red, RAL 3003

(excluding partition material)



Other locking systems see p. 28–31







Light grey RAL 7035

Drawer cabinets I stationary and mobile



×36 E	W	717 mm D 77 725 mm				
612×612 mm	Н↑	Number of drawers mm	kg	6	Art. no. 🞇	
	800	4 : 1 × 100 / 2 × 150 / 1 × 300	75	KEY Lock	78.632.XXX	
	800	6 : 2×75 / 2×100 / 1×150 / 1×200	75	KEY Lock	78.636.XXX	
	850	4 : 1 × 100 / 1 × 150 / 1 × 200 / 1 × 300	75	KEY Lock	79.382.XXX	
20.	850	4 : 1 × 100 / 1 × 150 / 1 × 200 / 1 × 300	200	KEY Lock	79.498.XXX	
	850	5 : 1 × 50 / 2 × 100 / 1 × 200 / 1 × 300	75	KEY Lock	14.411.XXX	
	850	5 : 1 × 50* / 2 × 100 / 1 × 200 / 1 × 300	200	KEY Lock	14.505.XXX	
	850	5 : 1 × 100 / 3 × 150 / 1 × 200	75	KEY Lock	14.410.XXX	
	850	5 : 1 × 100 / 3 × 150 / 1 × 200	200	KEY Lock	14.504.XXX	
	850	7 : 1 × 50 / 2 × 75 / 2 × 100 / 1 × 150 / 1 × 200	75	KEY Lock	78.640.XXX	
	850	7 : 1 × 50* / 2 × 75 / 2 × 100 / 1 × 150 / 1 × 200	200	KEY Lock	78.642.XXX	
	850	7 : 2 × 75 / 3 × 100 / 2 × 150	75	KEY Lock	14.409.XXX	
	850	7 : 2 × 75 / 3 × 100 / 2 × 150	200	KEY Lock	14.503.XXX	
	850	8 : 1 × 50 / 2 × 75 / 4 × 100 / 1 × 150	75	KEY Lock	14.408.XXX	
	850	8: 1 × 50* / 2 × 75 / 4 × 100 / 1 × 150	200	KEY Lock	14.502.XXX	

When ordering a drawer cabinet from these two pages with CODE Lock, please add the suffix "C" or for RFID or AUTO Lock the suffix "F" or "A" to the article number from the table (e.g. 78.467.XXXX.C).

Other locking systems see p. 28–31





Light blue RAL 5012



Light grey RAL 7035

* Load capacity max. 75 kg





Art. no. **13.106.200** Anthracite grey, RAL 7016 (excluding partition material)

36×36 E

W→ 717 mm















	7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7			
H <mark>↑</mark>	Number of drawers mm	kg		Art. no.
1000	6 : 1 × 50/3 × 150/2 × 200	75	KEY Lock	14.417.XXX
1000	6 : 1×50*/3×150/2×200	200	KEY Lock	14.510.XXX
1000	6 : 1 × 100 / 4 × 150 / 1 × 200	75	KEY Lock	14.415.XXX
1000	6 : 1 × 100 / 4 × 150 / 1 × 200	200	KEY Lock	14.509.XXX
1000	7 : 1 × 50 / 2 × 75 / 2 × 100 / 1 × 200 / 1 × 300	75	KEY Lock	14.416.XXX
1000	7 : 1×50*/2×75/2×100/1×200/1×300	200	KEY Lock	18.205.XXX
1000	8 : 1 × 50/2 × 75/2 × 100/2 × 150/1 × 200	75	KEY Lock	14.414.XXX
1000	8 : 1×50*/2×75/2×100/2×150/1×200	200	KEY Lock	14.508.XXX
1000	8 : 2×75/3×100/3×150	75	KEY Lock	14.412.XXX
1000	8 : 2×75/3×100/3×150	200	KEY Lock	14.506.XXX
1000	9 : 9 × 100	75	KEY Lock	78.648.XXX
1000	9 : 9 × 100	200	KEY Lock	78.650.XXX
1000	10 : 1 × 50 / 2 × 75 / 7 × 100	75	KEY Lock	14.413.XXX
1000	10 : 1×50*/2×75/7×100	200	KEY Lock	14.507.XXX
1450	9 : 2×75/2×100/2×150/2×200/1×300	75	KEY Lock	78.309.XXX
1450	9 : 2×75/2×100/2×150/2×200/1×300	200	KEY Lock	14.511.XXX
1450	9 : 3 × 100 / 5 × 150 / 1 × 300	75	KEY Lock	78.311.XXX
1450	9 : 3 × 100 / 5 × 150 / 1 × 300	200	KEY Lock	13.106.XXX
1450	10 : 1 × 50 / 5 × 100 / 4 × 200	75	KEY Lock	78.313.XXX
1450	10 : 1 × 50*/5 × 100/4 × 200	200	KEY Lock	14.512.XXX
890	3 : 1×100/1×200/1×300	200	KEY Lock	69.927.XXX
890	5 : 1 × 50/2 × 100/1 × 150/1 × 200	75	KEY Lock	69.928.XXX
050		7.	VEV Lask	69.929.XXX
890	6 : 2 × 75 / 3 × 100 / 1 × 150	75	KEY Lock	03.323.
	6 : 2 × 75 / 3 × 100 / 1 × 150	/5	KEY LOCK	09.929.
	6 : 2×75/3×100/1×150 5 : 1×50/2×100/1×150/1×200	75	KEY LOCK	
890				
890			KEY Lock	

Mobile cabinets

All mobile drawer cabinets on this page are equipped with:

- 1 raised edge on 4 sides and ribbed mat,
- 1 push-bar,1 pair castor holders with rubber castors Ø 160 mm, Drawer safety catch on right, Load capacity 600 kg

For height 890 mm:

Rubber casters Ø 100 mm, capacity 400 kg



Art. no. **78.668.090** Gentian blue, RAL 5010 (excluding partition material)

Drawer cabinets I stationary









ΗT	Number of drawers mm	kg		Art. no. 🛚 🐫
850	7 : 1 × 50/2 × 75/2 × 100/1 × 150/1 × 200	75	KEY Lock	78.686.XXX
850	7 : 1 × 50*/2 × 75/2 × 100/1 × 150/1 × 200	200	KEY Lock	78.688.XXX
850	7 : 2×75/2×100/2×125/1×150	75	KEY Lock	78.690.XXX
850	7 : 2×75/2×100/2×125/1×150	200	KEY Lock	78.692.XXX
850	8 : 4×75/3×100/1×150	75	KEY Lock	78.682.XXX
850	8 : 4×75/3×100/1×150	200	KEY Lock	78.684.XXX




1000	7 : 1×50/2×75/2×100/1×200/1×300	75	KEY Lock	78.694.XXX	
1000	7 : 1×50*/2×75/2×100/1×200/1×300	200	KEY Lock	78.696.XXX	
1000	8 : 1×50/2×75/3×100/1×150/1×250**	75	KEY Lock	78.698.XXX	
1000	8 : 1×50*/2×75/3×100/1×150/1×250	200	KEY Lock	78.700.XXX	
1000	8 : 3×50/2×75/2×100/1×150/1×250**	75	KEY Lock	78.702.XXX	
1000	8 : 3×50*/2×75/2×100/1×150/1×250	200	KEY Lock	78.704.XXX	



9 : 3 × 100/5 × 150/1 × 300**	75	KEY Lock	78.706.XXX	
9 : 3 × 100/5 × 150/1 × 300	200	KEY Lock	78.708.XXX	
9 : 9 × 150	75	KEY Lock	78.710.XXX	
9 : 9 × 150	200	KEY Lock	78.712.XXX	
13 : 4×75/6×100/3×150	75	KEY Lock	78.714.XXX	
13 : 4 × 75/6 × 100/3 × 150	200	KEY Lock	78.716.XXX	
	9: 3 × 100/5 × 150/1 × 300 9: 9 × 150 9: 9 × 150 13: 4 × 75/6 × 100/3 × 150	9: 3 × 100 / 5 × 150 / 1 × 300 200 9: 9 × 150 75 9: 9 × 150 200 13: 4 × 75 / 6 × 100 / 3 × 150 75	9: 3 × 100/5 × 150/1 × 300 200 KEY Lock 9: 9 × 150 75 KEY Lock 9: 9 × 150 200 KEY Lock 13: 4 × 75/6 × 100/3 × 150 75 KEY Lock	9: 3 × 100/5 × 150/1 × 300 200 KEY Lock 78.708.XXX 9: 9 × 150 75 KEY Lock 78.710.XXX 9: 9 × 150 200 KEY Lock 78.712.XXX 13: 4 × 75/6 × 100/3 × 150 75 KEY Lock 78.714.XXX

^{*} Load capacity max. 75 kg





Art. no. **78.716.010** Light blue, RAL 5012 (excluding partition material)

^{**} Load capacity 200 kg





54×36 E



W → 1023 mm









Η <mark>↑</mark>	Number of drawers mm	kg		Art. no. 👋	
850	5 : 3 × 100 / 1 × 150 / 1 × 300**	75	KEY Lock	78.796.XXX	
850	5 : 3 × 100 / 1 × 150 / 1 × 300	200	KEY Lock	78.798.XXX	
850	6 : 2×75 / 2×100 / 1×150 / 1×250**	75	KEY Lock	78.800.XXX	
850	6 : 2×75 / 2×100 / 1×150 / 1×250	200	KEY Lock	78.802.XXX	
850	7 : 1 × 50/2 × 75/2 × 100/1 × 150/1 × 200	75	KEY Lock	78.804.XXX	
850	7 : 1×50*/2×75/2×100/1×150/1×200	200	KEY Lock	78.806.XXX	







1000	5 : 2 × 100 / 2 × 200 / 1 × 300**	75	KEY Lock	79.390.XXX
1000	5 : 2 × 100 / 2 × 200 / 1 × 300	200	KEY Lock	79.392.XXX
1000	6 : 1 × 100 / 4 × 150 / 1 × 200	75	KEY Lock	78.291.XXX
1000	6 : 1 × 100 / 4 × 150 / 1 × 200	200	KEY Lock	14.515.XXX
1000	7 : 1×50/2×75/2×100/1×200/1×300**	75	KEY Lock	78.292.XXX
1000	7 : 1×50*/2×75/2×100/1×200/1×300	200	KEY Lock	14.516.XXX
1000	8 : 1 × 50/2 × 75/2 × 100/2 × 150/1 × 200	75	KEY Lock	78.293.XXX
1000	8 : 1×50*/2×75/2×100/2×150/1×200	200	KEY Lock	12.541.XXX
1000	8 : 2 × 75 / 3 × 100 / 3 × 150	75	KEY Lock	78.294.XXX
1000	8 : 2 × 75 / 3 × 100 / 3 × 150	200	KEY Lock	14.513.XXX
1000	10 : 1 × 50 / 2 × 75 / 7 × 100	75	KEY Lock	78.295.XXX
1000	10 : 1×50*/2×75/7×100	200	KEY Lock	14.514.XXX

1450	9 : 2×75/2×100/2×150/2×200/1×300**	75	KEY Lock	78.296.XXX
1450	9 : 2×75/2×100/2×150/2×200/1×300	200	KEY Lock	12.550.XXX
1450	9 : 3 × 100 / 5 × 150 / 1 × 300**	75	KEY Lock	78.297.XXX
1450	9 : 3 × 100 / 5 × 150 / 1 × 300	200	KEY Lock	14.518.XXX
1450	10 : 1 × 50 / 5 × 100 / 4 × 200	75	KEY Lock	78.298.XXX
1450	10 : 1×50*/5×100/4×200	200	KEY Lock	14.519.XXX

LISTA quick delivery range

These LISTA products in the colours light blue (.010) and light grey (.020) are available ex-works at short notice.



Light blue RAL 5012



Light grey RAL 7035



Art. no. 14.516.514 Housing: Light grey, RAL 7035 Fronts: Light blue, RAL 5012 (excluding partition material)

Drawer cabinets I stationary



	$1 \times$		_	
h/	-	-	h	
	+ ^	-	u	ш.







1088×612 mm

ΗŢ	Number of drawers mm	Model	kg		Art. no. 👯
1000	7 : 2×75/2×100/1×150**/2×200**	-	75	KEY Lock	78.826.XXX
1000	7 : 2×75/2×100/1×150/2×200	-	200	KEY Lock	78.828.XXX
1000	8 : 2×75/4×100/1×150**/1×200**	-	75	KEY Lock	78.830.XXX
1000	8 : 2 × 75 / 4 × 100 / 1 × 150 / 1 × 200	-	200	KEY Lock	78.832.XXX
1000	8 : 2 × 75 / 3 × 100 / 3 × 150**	-	75	KEY Lock	78.834.XXX
1000	8 : 2 × 75 / 3 × 100 / 3 × 150	-	200	KEY Lock	78.836.XXX



1450	10 : ${2 \times 150 / 1 \times 125 / 1 \times 75 / \atop 3 \times 100 / 1 \times 150 / 2 \times 200}$	-	200	KEY Lock	78.838.XXX
1450	11 : $\frac{1 \times 150}{5 \times 100} / \frac{1 \times 125}{1 \times 75} / \frac{1 \times 75}{1 \times 200}$	-	200	KEY Lock	78.840.XXX
1450	12 : $1 \times 150 / 1 \times 125 / 3 \times 75 / 5 \times 100 / 1 \times 150 / 1 \times 200$	-	200	KEY Lock	78.842.XXX



870 8: 1×200** (64 E) / 2×150, 1×200 (36 E) / 2×150, 2×100 (18 E)

Multiplex top, 20 mm

75 KEY Lock **69.562.XXX**




Art. no. **78.842.514** Housing: Light grey, RAL 7035 Fronts: Light blue, RAL 5012 (excluding partition material)




Art. no. **69.562.200** with Multiplex cover panel, 20 mm anthracite grey, RAL 7016





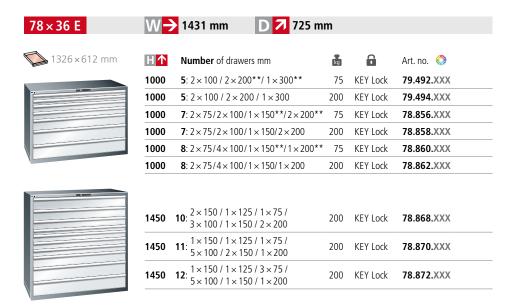



Drawer cabinets I freely configurable

1. Cabinet housing with locking systems

To lock all drawers simultaneously, the cabinet housing can be customised with the electronic KEY Lock, CODE Lock, RFID Lock or AUTO Lock.



Housing with KEY Lock



Housing with CODE Lock



Housing with RFID Lock



Housing with AUTO Lock

When ordering a cabinet with **CODE Lock**, please add the suffix **"C"** or for **RFID** or **AUTO Lock** the suffix **"F"** or **"A"** to the article number from the table (e.g. 71.088.XXX.C).

> Other locking systems: see p. 28-31







27 × 27 E

Depth 27 E



36 × 27 E



411 × 572 mm

564 × 572 mm

717 × 572 mm

1023 × 572 mm

H 1	Clear Height mm	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
283	200	71.059.XXX	71.070.XXX	-	-
383	300	71.060.XXX	71.071.XXX	-	-
533	450	71.061.XXX	71.072.XXX	=	-
650	550	71.062.XXX	71.073.XXX	0	0
700	600	71.063.XXX	71.074.XXX	71.086.XXX	71.102.XXX
800	700	0	71.075.XXX	0	0
850	750	71.401.XXX	71.076.XXX	71.087.XXX	71.103.XXX
1000	900	71.064.XXX	71.077.XXX	71.088.XXX	71.104.XXX
1150	1050	0	0	0	0
1325	1225	0	0	0	0
1450	1350	0	0	71.089.XXX	71.105.XXX
1625	1525	0	0	0	0

○ = on request

2. Drawers

Drawers with different front heights can be incorporated into the same cabinet housing in any order. The insides of the drawer walls are all fitted with a slotted grid in units (E) of 17 mm, which means each drawer can be partitioned as required.







Drawer safety catches

Standard: standard model including single drawer safety catch (all article numbers from the table).

Safety catch on right: the minimum requirement for mobile drawer cabinets. One-sided drawer safety catch on the right can be released with one hand and prevents accidental opening of drawers even if the cabinet is unlocked.




When ordering a single safety catch on the right, please add the suffix "R" to the article number in the table (e.g. 72.034.XXX.R).

Ordering tips

When selecting drawers, the clear height of the cabinet housing defines the size. The sum of the drawer front heights (C) must be equal to the clear height (B) (see diagram).





Partition material for drawers



75 ka













18×27 E



459 × 459 mm



Art. no. 🞇

72.042.XXX

612 × 459 mm



918 × 459 mm

Art. no. 🞇

72.080.XXX

72.505.XXX

72.506.XXX

72.507.XXX

72.508.XXX

ısabı	e	sur	tace	mm	

>	×	
	Usable height	Shell height
	32.5	28.5

57.5 49

82.5

107,5

132,5

182,5 176

232,5

282,5

7	306 × 459 mm
المد	alls.

Shell height 28,5	Art. no. *** 72.000.XXX
49	72.001.XXX
76	72.002.XXX
76	-
126	72.003.XXX

72.004.XXX

72.005.XXX

Art. no. 🞇
72.000.XXX
72.001.XXX
72.002.XXX

Art. no. 🞇 72.012.XXX 72.013.XXX 72.015.XXX

72.023.XXX

72.025.XXX

72.043.XXX 72.045.XXX 72.017.XXX 72.047.XXX 72.019.XXX 72.021.XXX

72.049.XXX 72.051.XXX 72.053.XXX

72.055.XXX

72.509.XXX

HΛ

50*

75

100

125

150

200

250

300

200 kg

226

276

-	Load	capacity
75	57,5	49
100	82,5	76
125	107,5	76
150	132,5	126

* Drawers with a front height of 50 mm must be placed in the top position

200	-	capacity				
75	57,5	49	-	72.014.XXX	72.044.XXX	72.081.XXX
100	82,5	76	-	72.016.XXX	72.046.XXX	72.082.XXX
125	107,5	76	-	72.018.XXX	72.048.XXX	72.083.XXX
150	132,5	126	-	72.020.XXX	72.050.XXX	72.084.XXX
200	182,5	176	-	72.022.XXX	72.052.XXX	72.085.XXX
250	232,5	226	-	72.024.XXX	72.054.XXX	72.086.XXX
300	282.5	276	-	72.026.XXX	72.056.XXX	72.087.XXX



Depth 36 E						
18×36 E	27×36 E	36×36 E	45×36 E	54×36 E	64×36 E	78×36 E
411 × 725 mm	564×725 mm	717×725 mm	870×725 mm	1023 × 725 mm	1193×725 mm	1431×725 mm
Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
71.065.XXX	71.078.XXX	=	=	-	-	-
71.066.XXX	71.079.XXX	-	=	=	-	-
71.067.XXX	71.080.XXX	=	=	=	-	-
71.068.XXX	71.081.XXX	0	0	0	0	0
71.069.XXX	71.082.XXX	71.090.XXX	71.098.XXX	71.106.XXX	71.110.XXX	71.114.XXX
0	71.083.XXX	71.091.XXX	0	0	0	0
71.407.XXX	71.084.XXX	71.092.XXX	71.099.XXX	71.107.XXX	71.416.XXX	71.421.XXX
71.408.XXX	71.085.XXX	71.093.XXX	71.100.XXX	71.108.XXX	71.111.XXX	71.115.XXX
0	0	71.094.XXX	0	0	0	0
0	0	71.095.XXX	0	0	71.112.XXX	71.116.XXX
0	0	71.096.XXX	71.101.XXX	71.109.XXX	71.113.XXX	71.117.XXX
0	0	71.097.XXX	0	0	0	0

18×36 E	27×36 E	36×36 E	45×36 E	54 × 36 E	64×36 E	78×36 E
306 × 612 mm	459×612 mm	612×612 mm	765×612 mm	918×612 mm	1088 × 612 mm	1326 × 612 mm
Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
72.006.XXX	72.027.XXX	72.057.XXX	72.072.XXX	72.088.XXX	72.805.XXX	72.806.XXX
72.007.XXX	72.028.XXX	72.058.XXX	72.540.XXX	72.510.XXX	72.515.XXX	72.517.XXX
72.008.XXX	72.030.XXX	72.060.XXX	72.541.XXX	72.511.XXX	72.516.XXX	72.518.XXX
-	72.032.XXX	72.062.XXX	72.542.XXX	72.512.XXX	-	-
72.009.XXX	72.034.XXX	72.064.XXX	72.543.XXX	72.513.XXX	-	-
72.010.XXX	72.036.XXX	72.066.XXX	72.544.XXX	72.514.XXX	=	-
-	72.038.XXX	72.068.XXX	-	-	-	-
72.011.XXX	72.040.XXX	72.070.XXX	-	-	-	-
_	72.029.XXX	72.059.XXX	72.073.XXX	72.089.XXX	72.096.XXX	72.103 .XXX
-	72.031.XXX	72.061.XXX	72.074.XXX	72.090.XXX	72.097.XXX	72.104.XXX
<u>-</u>	72.033.XXX	72.063.XXX	72.075.XXX	72.091.XXX	72.098.XXX	72.105.XXX
-	72.035.XXX	72.065.XXX	72.076.XXX	72.092.XXX	72.099.XXX	72.106.XXX
-	72.037.XXX	72.067.XXX	72.077.XXX	72.093.XXX	72.100.XXX	72.107.XXX
-	72.039.XXX	72.069.XXX	72.078.XXX	72.094.XXX	72.101.XXX	72.108.XXX
-	72.041.XXX	72.071.XXX	72.079.XXX	72.095.XXX	72.102.XXX	72.109.XXX



Recessed hinged doors for pull-out and adjustable shelves

Made from sheet steel as a front closing option for the pullout and adjustable shelves built into the housing beneath the drawers. Equipped with a recessed grip and magnetic catch incl. KEY Lock. The sum of the hinged door front heights and all drawer front heights must be equal to the clear height of the cabinet housing.

99.XXX	338.737	7.XXX
23.XXX	74.127	7.XXX
22.XXX	74.126	5.XXX
66.XXX	338.736	5.XXX
11.XXX	74.113	3.XXX
10.XXX	74.112	2.XXX
. 🥌	Art. no.	
× 27 E	27×	27 E
	× 27 E	× 27 E 27 ×

Depth 27 E



Pull-out and adjustable shelves for recessed doors

Made from steel sheet, pigeon grey, NCS S 4502-B. Load capacity of pull-out shelf 75 kg, adjustable shelf 200 kg. Thanks to the 25 mm increments in the vertical supports of the cabinet housings, different shelves can be fitted in the same housing in any order.

Adjustable shelf , H 75 mm Usable dimensions (W × D mm)	74.005.000 350 × 465	74.009.000 503 × 465
Pull-out shelf, H 100 mm Usable dimensions (W×D mm)	74.004.000 281×459	74.008.000 434×459



Raised edges on 3 sides and ribbed mat

Made from sheet steel, black, NCS S 9000-N, including ribbed mat, black.

Raised edge with ribbed mat Dimensions (W \times D \times H mm)	74.023.000 411 × 572 × 20	74.025.000 564 × 572 × 20
Ribbed mat only	74.012.000	74.014.000
Dimensions (W \times D \times H mm)	$406 \times 567 \times 3$	$559 \times 567 \times 3$



Cover panel, resin-coated

Surface and edging light grey, NCS S 1500-N, laminated chipboard (quality class E1), with melamine coating on both sides (manufactured according to standard EN 14322). 2 mm thick plastic edging on all sides. Including pre-drilled holes and fastening material.

Resin-coated cover panel	74.140.000	17.268.000
Dimensions (W \times D \times H mm)	$411 \times 572 \times 22$	$564 \times 572 \times 22$



Multiplex cover panel

Made of steamed beech veneers, glued in multiple layers and waterproof (DIN 68 705), bevelled edges, sanded, oiled and waxed surface. The panel is splash-proof, dirt-repellent and largely impervious to oil and grease. Including pre-drilled holes and fastening material.

Multiplex cover panel	12.590.000	12.592.000
Dimensions (W \times D \times H mm)	$411 \times 572 \times 20$	$564 \times 572 \times 20$



Folding countertop

Attaches to the side of the drawer cabinet (depth 27 E). It can be mounted either on one side or on both drawer cabinet edges and offers a work surface up to $1000\,\mathrm{mm}$ ($2\times500\,\mathrm{mm}$) wider. It is operated one-handed. Multiplex top, sanded, oiled and waxed surface. Load capacity $25\,\mathrm{kg}$, Housing incl. 10×10 square perforation, $38\,\mathrm{mm}$ divisions with slots, for cabinet height $850\,\mathrm{mm}$.

Folding countertop	69.555.XXX	69.555.XXX
Dimensions for folded module Dimensions of top (W \times D \times H mm)	$86 \times 571 \times 880$ $500 \times 565 \times 20$	$86 \times 571 \times 880$ $500 \times 565 \times 20$



Push bar


This push bar can be mounted for the mobile version of drawer cabinets without raised edges in the transverse direction of travel. Galvanised steel, Ø 22 mm, curved.

Push bar	-	12.610.000
Width mm		399

^{*} without cylinder; please order this separately



Dept	th 27 E				Depth 36 E			
36×27 E	54 × 27 E	18×36 E	27×36 E	36×36 E	45×36 E	54×36 E	64×36 E	78×36 E
Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.
74.128.XXX	-	74.110.XXX	74.112.XXX	74.128.XXX	-	-	-	-
74.129.XXX	=	74.111.XXX	74.113.XXX	74.129.XXX	=	-	-	-
338.735.XXX	-	340.166.XXX	338.736.XXX	338.735.XXX	-	-	-	-
74.130.XXX	-	74.122.XXX	74.126.XXX	74.130.XXX	-	-	-	-
74.131.XXX	-	74.123.XXX	74.127.XXX	74.131.XXX	-	-	-	-
340.048.XXX	-	340.999.XXX	338.737.XXX	340.048.XXX	-	-	-	-
222.376.000	<u>-</u>		222.376.000		<u>-</u>	-	-	-
74.105.000 656 × 465	-	74.007.000 350×618	74.011.000 503×618	74.106.000 656×618	-	-	-	-
-	-	74.006.000 281×612	74.010.000 434×612	342.371.080 587 × 612	=	=	-	-
74.027.000	74.030.000	74.024.000	74.026.000	74.028.000	74.029.000	74.031.000	74.032.000	74.033.000
717 × 572 × 20	1023 × 572 × 20	411×725×20	564×725×20	717×725×20	870×725×20	1023 × 725 × 20	1193×725×20	1431×725×20
74.016.000 712×567×3	74.019.000 1018 × 567 × 3	74.013.000 406 × 720 × 3	74.015.000 559 × 720 × 3	74.017.000 712×720×3	74.018.000 865×720×3	74.020.000 1018 × 720 × 3	74.021.000 1188×720×3	74.022.000 1426 × 720 × 3
17.270.000	74.143.000	74.141.000	17.269.000	17.271.000	74.142.000	74.144.000	74.145.000	74.146.000
717 × 572 × 22	1023 × 572 × 22	411×725×22	564×725×22	717×725×22	870×725×22	1023×725×22	1193×725×22	1431×725×22
12.594.000	12.597.000	12.591.000	12.593.000	12.595.000	12.596.000	12.598.000	12.599.000	12.600.000
717×572×20	1023×572×20	411×725×20	564×725×20	717×725×20	870×725×20	1023×725×20	1193×725×20	1431×725×2
69.555.XXX 86×571×880 500×565×20	69.555.XXX 86×571×880 500×565×20	-	-	-	-	-	-	-
86 × 571 × 880	86×571×880	<u>-</u>	_	_	-	_	-	
12.610.000 399	12.610.000 399	12.611.000 552	12.611.000 552	12.611.000 552	12.611.000 552	12.611.000 552	12.611.000 552	12.611.00 552



www.lista.com



Perforated side panel

To allow accessories (waste container, protective earth socket retaining bracket) or keyhole hooks to be attached to the side of the drawer cabinet (depth 27 E), this perforated plate can be fastened to the side of the housing cabinet. Square perforation 10×10 , 38 mm divisions with slots. Design for housing height 850 mm. Sheet steel design. Colour: as per colour chart.

Depth 27 E

18×27 E

27 × 27 E

Art. no.

Art. no.

Perforated side panel Dimensions (H × D mm)

69.552.000 755 × 570



Housing base

Made from sheet steel, as height compensation, black, NCS S 9000-N.

Housing base, H 50 mm Dimensions (W×D mm)	74.045.000 411 × 540	74.049.000 564 × 540
Housing base, H 100 mm	74.046.000	74.050.000
Dimensions (W × D mm)	411×540	564×540



2-way pallet/forklift truck base

Made from sheet steel for screwing to the underside of the housing, black, NCS S 9000-N. Base cover only for attaching as a cover on the front or rear.

Dimensions (W × D mm)	411×540	564×540
Housing base, H 100 mm	74.046.000	74.050.000
Dimensions (W × D mm)	411 × 540	564×540
Base, without cover, H 100 mm	-	-
Dimensions (W × D mm)		
Cover only, H 100 mm	-	-



Raised edges on 4 sides, with push-bar

Made from sheet steel, black, NCS S 9000-N, including ribbed mat, black. Push-bar consisting of a pair of plastic handle grips, RAL 9006 white aluminium, and aluminium tube Ø 25 mm, clear anodised.

Raised edge, H 53 mm	74.034.000	74.036.000
Dimensions (W×D mm)	411×572	564×572
Direction of travel	lengthwise	lengthwise



Pair of castor holders

Consisting of 2 swivel castors with brakes and 2 fixed castors. Castor holders, sendzimir galvanised. Nylon castors black, rubber castors grey.



For safety reasons, mobile drawer cabinets must be fitted with a push-bar and a single drawer safety catch.

74.071.000	74.071.000
137/400 lengthwise	137/400 lengthwise
74.072.000	74.072.000
137/400 lengthwise	137/400 lengthwise
-	74.075.000
	204/600 lengthwise
	137/400 lengthwise 74.072.000 137/400



Protective strip

Made of black polythene, including fastening screws for mounting on the sides of the drawer cabinet. Two protective strips must be attached to each side.

Protective strip	333.888.000
Length (mm)	567



Note: Can only be used in combination with housings with a height of 700 mm.



Levelling foot set

Set consisting of 4 plastic pivot feet, Ø 50 mm, including mounting plates and fastening screws. Adjustment range: 45 – 90 mm. Load capacity: 1200 kg/foot. Art. no. 69.919.000



Levelling foot set for cover plates

Set consisting of 2 pairs of levelling feet (4 plastic articulatedfeet), Ø 50 mm, mounting plates designed for the levelling foot holder, incl. fastening screws. Adjustment range 45-90 mm. Load capacity 1200 kg/foot

Levelling foot set for cover plates	69.920.000
-------------------------------------	------------




Levelling foot covers

made of sheet steel, powder-coated white aluminium RAL 9006. Cover plate height 50 mm. Prevents small parts from getting under the cabinet. Closed look. The levelling foot set (69.920.000 or 69.921.000) is required for assembly. Cover plate can also be retrofitted afterwards.

Side cover plates	cover plates 69.847.	
F	60.040.430	60.044.430
Front cover plates	69.840.130	69.841.130



	h 27 E				Depth 36 E				
36×	27 E	54 × 27 E	18×36 E	27×36 E	36×36 E	45 × 36 E	54×36 E	64×36 E	78×36
Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.
69.552.000 755 × 570	<u>-</u>	69.552.000 755×570	-	-	-	-	-	-	-
74.053.000 717 × 540	-	74.057.000 1023 × 540	74.047.000 411×693	74.051.000 564×693	74.055.000 717×693	74.056.000 870×693	74.058.000 1023 × 693	74.059.000 1193×693	74.060.00
74.054.000 717 × 540	-	-	74.048.000 411 × 693	74.052.000 564×693	-	-	-	-	-
74.061.000 717 × 506	-	74.064.000 1023 × 506	-	74.410.000 564×659	74.062.000 717×659	74.063.000 870×659	74.065.000 1023 × 659	74.065.000 1193 × 659	74.065.00 (1431×659
74.066.000	-	74.068.000	-	74.411.000	74.066.000	74.067.000	74.068.000	74.069.000	74.070.000
74.038.000 717 × 572 crosswise	74.158.000 717×572 lengthwise	74.041.000 1023 × 572 crosswise	74.035.000 411×725 lengthwise	74.037.000 564×725 lengthwise	74.039.000 717×725 lengthwise	74.040.000 870×725 crosswise	74.042.000 1023 × 725 crosswise	74.043.000 1193×725 crosswise	74.044.000 1431 × 725 crosswise
74.077.000 137/400 crosswise	74.071.000 137/400 lengthwise	74.077.000 137/400 crosswise	74.073.000 137/400 lengthwise	74.073.000 137 / 400 lengthwise	74.073.000 137 / 400 lengthwise	74.080.000 137 / 400 crosswise	74.080.000 137/400 crosswise	74.080.000 137 / 400 crosswise	74.080.00 (137/400 crosswise
74.078.000 137/400 crosswise	74.072.000 137/400 lengthwise	74.078.000 137/400 crosswise	74.074.000 137/400 lengthwise	74.074.000 137 / 400 lengthwise	74.074.000 137 / 400 lengthwise	74.081.000 137/400 crosswise	74.081.000 137/400 crosswise	74.081.000 137/400 crosswise	74.081.00 137 / 400 crosswise
74.079.000 204/600 crosswise	74.075.000 204/600 lengthwise	74.079.000 204/600 crosswise	-	74.076.000 204/600 lengthwise	74.076.000 204/600 lengthwise	74.082.000 204/600 crosswise	74.082.000 204/600 crosswise	74.082.000 204/600 crosswise	74.082.00 0 204/600 crosswise
	333.888.000 567					323.434.000 720			
	69.920.000					69.921.000			



69.844.130

69.840.130

69.841.130

69.842.130

69.843.130

69.844.130

69.845.130

69.846.130

69.842.130

Drawer cabinets I Drawers with power supply



66



36×36 E

Cabinet housing

Housing incl. punch-outs for power supply, incl. cable harness, excl. connection cable with earthing (must be ordered separately according to the lower version). For simultaneous securing of all drawers. Incl. KEY Lock, our standard locking system with replaceable cylinders. Manual opening/locking with key.



When ordering a cabinet with CODE Lock, please add the suffix "C" or for RFID or AUTO Lock the suffix "F" or "A" to the article number from the table (e.g. 74.915.XXX.C).

Other locking systems: see p. 28–31

		36×27 E	36×36 E
_	or area mm	717×572 mm	717×725 mm
H 1	Clear Height mm	Art. no. 🞇	Art. no. 🥌
700	600	74.913.XXX	74.917.XXX
800	700	₹	74.918.XXX
850	750	74.914.XXX	74.919.XXX
1000	900	74.915.XXX	74.920.XXX
1150	1050	-	74.921.XXX
1325	1225	₹	74.922.XXX
1450	1350	74.916.XXX	74.923.XXX
1625	1525	-	74.924.XXX
	net accessories, rom page 62	Partition material see from page 248	

Drawers

Drawers with different front heights can be incorporated into the same cabinet housing in any order. The insides of the drawer walls are all fitted with a slotted grid in units (E) of 17 mm, which means each drawer can be partitioned as required.

Drawer usable surface mm

Ordering tips

When selecting drawers, the clear height of the cabinet housing defines the size. The sum of the drawer front heights (C) must be equal to the clear height (B) (see diagram).





* Drawers with front height of 50 mm must be placed in the top position.





Max. 3 drawers with power supply per cabinet.

$W \rightarrow \times D 7$			612×4	159 mm	612×612 mm			
H 1	Usable height mm	Shell height mm	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇		
Drawer	load capacity		75 kg	200 kg	75 kg	200 kg		
'Stand	'Standard' drawers without power supply							
50*	32,5	28,5	72.042.XXX	-	72.057.XXX	-		
75	57,5	49	72.043.XXX	72.044.XXX	72.058.XXX	72.059.XXX		
100	82,5	76	72.045.XXX	72.046.XXX	72.060.XXX	72.061.XXX		
125	107,5	76	72.047.XXX	72.048.XXX	72.062.XXX	72.063.XXX		

36 × 27 E

.XXX .xxx 72.049.XXX 72.050.XXX 72.064.XXX 150 132,5 72.065.XXX 126 72.051.XXX 72.052.XXX 72.066.XXX 72.067.XXX 200 182,5 176 250 232,5 226 72.053.XXX 72.054.XXX 72.068.XXX 72.069.XXX 300 282,5 276 72.055.XXX 72.056.XXX 72.070.XXX 72.071.XXX

Drawers with power supply

With hole cut-out for the assembly of 1× power module, incl. cable quide, excl. connection cable (must be ordered separately according to the lower version).

200	182,5	176	74.973.XXX	74.820.XXX	74.976.XXX	74.823.XXX
250	232,5	226	74.974.XXX	74.821.XXX	74.977.XXX	74.824.XXX
300	282,5	276	74.975.XXX	74.822.XXX	74.978.XXX	74.825.XXX

Power supply

Power modules for drawers with power supply



 $1 \times$ switch. 1× socket 230 V



2 × socket 230 V



1× overcurrent protection (thermal fuse 10A), 1×230V socket



 $1 \times 230 \text{V}$ socket 2 × power USB

Power modules	Art. no. D/PE	Art. no. CH	Art. no. F	Art. no. GB
1	89.535.000	-	89.536.000	89.537.000
2	-	89.595.000	-	-
3	89.531.000	-	89.532.000	89.533.000
4	89.385.000	89.389.000	89.386.000	89.387.000
Connecting cable				
Incl. earthing*, length 3 m.	74.912.000	74.937.000	74.912.000	74.950.000



Drawer cabinets I Workshop add-on modules

Bespoke workshop design to suit your line of work. Workshop equipment from LISTA has been tried and tested thousands of times in diverse industries. The modular design and excellent quality ensure that LISTA applications fit perfectly, are durable and robust. Special industry requirements are consistently met.





Typical vehicle workshop solutions



- cz1 Accessible hinged-door cabinet
- Disposal cabinet
- Mobile drawer cabinet*
- C4 Stationary drawer cabinet*
- Media supply cabinet Compact
- Media supply tower
- Perforated rear panel*
- S2 Countertop*
 - Power conduit*
- Monitor overhead cabinet*
- Overhead cabinet*
- Roller shutter overhead cabinet

MRO solution I

Focused and flexible

Module combination













800 mm 1100 mm



MRO solution II

Ideal for a compact workshop solution

Module combination

















W → 2360 mm





MRO solution III

Conceived for ambitious use

Module combination























W > 3445 mm

□ 7 860 mm **∏** 1950 mm



MRO solution IV

No compromises on function or ergonomics

Module combination



























^{*}See relevant chapter

Drawer cabinets I Workshop add-on modules

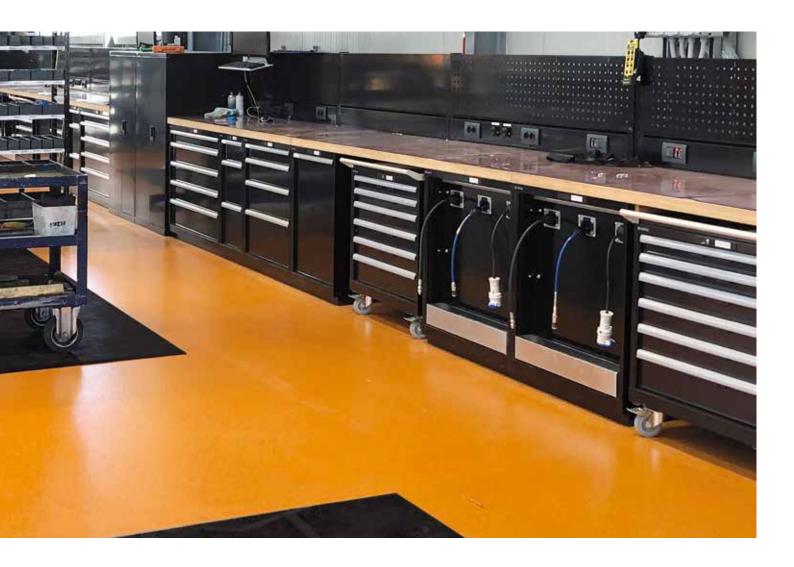

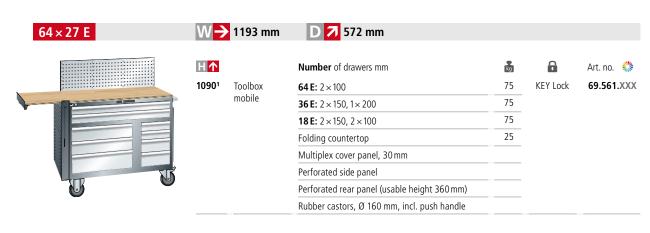

64×36 E	W	1193 mm	D 725 mm			
43	Н↑		Number of drawers mm	kg		Art. no. 🞇
	870	Toolbox	64 E: 1×200	200	KEY Lock	69.562.XXX
		stationary	36 E: 2 × 150, 1 × 200	75		
			18 E: 2×150, 2×100	75		
			Multiplex cover panel, 20 mm			

¹ Height without perforated rear panel

70 www.lista.com



D 7 725 mm	H
a	Hinge 1 adju Levelli

850 mm (without Levelling feet)

1 adjus Levellir	1 adjustable shelf Levelling foot set for cover plates (4 × feet) ——————————————————————————————————	Doors mounted	W→	LISTA unit	Art.No. 🞇
		right	411 mm	18×36E	69.941.XXX
		left	411 mm	18×36E	69.942.XXX
		right	564 mm	27×36E	69.943.XXX
		left	564 mm	27×36E	69.944.XXX
		right	717 mm	36×36E	69.945.XXX
		left	717 mm	36×36E	69.946.XXX
		right	717 mm	36×36E	69.903.XXX
		left	717 mm	36×36E	69.902.XXX



C2 Disposal cabinet Levelling foot set for cover plates (4 × feet) Pull-out drawer: completely powder-coated according to colour chart Load capacity: 200 kg

Capacity	W->	LISTA unit	Art.No. 🞇
1×601	411 mm	18×36E	69.937.XXX
2×601	564 mm	27×36E	69.938.XXX
4×601	1023 mm	54×36E	69.939.XXX





C5	Media supply cabinet	Hose port	Cut-outs for mo- dules	400V socket*	W→	LISTA unit	Art.No.
	1 galvanised** drip tray Levelling foot set for cover plates (4 × feet)	1	_	_	411 mm	18 × 36 E	69.930.XXX
	Levelling foot set for cover plates (4 × feet)	2	-	_	411 mm	18×36E	69.931.XXX
		2	_	_	564 mm	27 × 36 E	69.932.XXX
		3	_	_	717 mm	36×36E	69.933.XXX
		4	_	_	1023 mm	54×36E	69.934.XXX
		5	_	_	1193 mm	64×36E	69.935.XXX
CC5	Media supply cabinet Compact	2	2	_	411 mm	18×36E	69.990.XXX
	Hose gates in combination with energy modules Order option: additionally incl. 400V socket Levelling foot set for cover plates (4 × feet)	2	2	available	411 mm	18×36E	69.991.XXX
		2	2	_	564 mm	27×36E	69.992.XXX
		2	2	available	564 mm	27×36E	69.993.XXX
CT5	Media supply tower (height 2000 mm) 2 galvanised drip trays**	2×3	_	_	1023 mm	54×36E	69.898.XXX
	Levelling foot set for cover plates (4 × feet) Overhead cabinet panels can be used on request for individual control unit	2×4	-	-	1023 mm	54×36E	69.925.XXX

^{*}The electrical connection must be installed by the customer.



C6	Power module cabinet	Туре	W→	LISTA unit	Art. No. 🞇
	Version 1	CH	411 mm	18×36E	69.910.XXX
	vitch/socket outlet 230 V***, 2×2 socket outlets 230 V, network sockets RJ45, Levelling foot set for cover plates ($4 \times$ feet)	D / PE	411 mm	18×36E	69.912.XXX
		F	411 mm	18×36E	69.914.XXX
		GB	411 mm	18×36E	69.916.XXX
	Version 2	CH	411 mm	18×36E	69.911.XXX
	1× switch/socket outlet 230 V***, 2×2 socket outlets 230 V, 2×2 compressed-air connections DN7 (inlet: push-on nipple: DN5; outlet: quick-release	D / PE	411 mm	18×36E	69.913.XXX
	coupling DN5), Levelling foot set for cover plates (4× feet)	F	411 mm	18×36E	69.915.XXX
		GB	411 mm	18×36E	69.917.XXX

^{***} CH version: $1 \times$ surge protection instead of socket outlet 230 V.





W6	Roller shutter cabinet
	Aluminium roller shutter, self-locking spr
	High usable depth: 215 mm, punch-outs

ring-loaded winding. High usable depth: 215 mm, punch-outs for power supply. Incl. integrated perforated rear panel with 10 \times 10 square perforation and 38 mm partitioning. Standard locking, KEY Lock.
Optionally with integrated cable conduit and adjustable shelves (see page 186)

Housing base	w→	H	Art. No. 🞇
yes	1500 mm	800 mm	69.850.XXX
yes	2000 mm	800 mm	69.851.XXX
no*	1500 mm	1050 mm	69.852.XXX
no*	2000 mm	1050 mm	69.853.XXX

^{*} For mounting on worktops.



 $[\]hbox{*}\hbox{$\sf Galvanisation cannot provide complete protection against all liquids.}$

Toolbox

Folding countertop

Integrated folding countertop module, single-handed operation. Load capacity: 25 kg. Multiplex top: $564 \times 500 \times 20$ mm. Designed for drawer cabinet depth 27 E and drawer cabinet height 850 mm. See page 73.

Perforated rear panel for Toolbox 64E

Self-supporting perforated rear panel module, direct mounting on the drawer cabinet. Square perforation, 10×10 mm, 38 mm divisions with slots for holding accessories, usable height 360 mm. Colour as per colour chart. W×H: 1193×550 mm See page 73.

Countertop

This multiplex worktop has been specially adapted to the 64×27 E drawer cabinet to ensure a flush transition to the folding countertop Multiplex top: 30 mm (W \times D: 1193 \times 572 mm).



Cabinet toolbox 6427E/3 and 6436E/3

The toolbox system for dimensions $64 \times 36\,\mathrm{E}$ and $64 \times 27\,\mathrm{E}$ (H: 850 mm) offers the flexible option of accommodating combined drawers in the dimensions 64, 36 and $18\,\mathrm{E}$. See page 73. There are also various accessories that allow the cabinet to be individually configured as a small mobile workstation.

Perforated side panel

Integrated perforated side rear panel module with 10×10 mm square perforation, 38 mm divisions with slots for holding accessories. Designed for drawer cabinet depth 27 E and drawer cabinet height 850 mm H \times D: 755 \times 570 mm. Sheet steel design. Colour as per colour chart.

72 www.lista.com



1. Cabinet housing with locking systems

To have simultaneous locking of all drawers, each cabinet housing can be configured individually using the KEY Lock



Housing with KEY Lock



Drawers with different front heights can be incorporated into the same cabinet housing in any order. The insides of the drawer walls are all fitted with a slotted grid in units

(E) of 17 mm, which means each drawer can be partitioned as required.



Drawer safety catches

Safety catch on right: the minimum requirement for mobile drawer cabinets. One-sided drawer safety catch on the right can be released with one hand and prevents accidental opening of drawers even if the cabinet is unlocked.



When ordering a single safety catch on the right, please add the suffix "R" to the article number in the table (e.g. 72.034.XXX.R).

Ordering tips

When selecting drawers, the clear height of the cabinet housing defines the maximum size. The sum of the drawer front heights (C1+C2) must correspond to the clear height (B1: 200 mm + B2: 500 mm), see diagram.




For further drawers, see p. 60/61



300

282,5

276

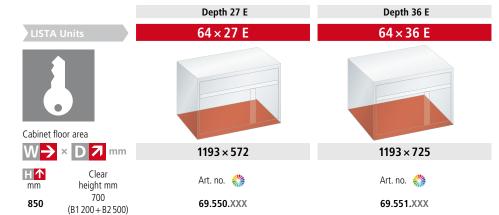

LISTA	A Units		18×27 E	36×27 E	64×27E	18×36E	36×36E	64×36E
75 Drawer	_	kg capacity						
W-	× D	7 mm	306×459	612×459	1088×459	306×612	612×612	1088 × 612
mm 50*	Usable height 32,5	Shell height 28,5	Art. no. *** 72.000.XXX	Art. no. ** 72.042.XXX	Art. no. 🞇	Art. no. *** 72.006.XXX	Art. no. *** 72.057.XXX	Art. no. % 72.805.XXX
75	57,5	49	72.001.XXX	72.043.XXX	-	72.007.XXX	72.058.XXX	72.515.XXX
100	82,5	76	72.002.XXX	72.045.XXX	72.800.XXX	72.008.XXX	72.060.XXX	72.097.XXX**
125	107,5	76	-	72.047.XXX	-	-	72.062.XXX	72.098.XXX**
150	132,5	126	72.003.XXX	72.049.XXX	-	72.009.XXX	72.064.XXX	72.099.XXX**
200	182,5	176	72.004.XXX	72.051.XXX	72.801.XXX	72.010.XXX	72.066.XXX	72.100.XXX**
250	232,5	226	-	72.053.XXX	-	-	72.068.XXX	-

72.011.XXX 72.070.XXX

Drawers with front height of 50 mm must be placed in the top position.

72.005.XXX 72.055.XXX

Load capacity 200 kg: For alternative drawer design, see page 60/61

3. Accessories for Toolbox 64×27 E

Accessories for the individual configuration of the 64 × 27 E toolbox



Model	Dimensions (mm)	Art. no. 🞇
Folding countertop Multiplex top: 20mm . Plate size (W×H): $500 \times 565 \text{mm}$. Max. load capacity: 25kg . Single-handed operation, Square perforation 10×10 , suitable for cabinet height 850mm	Folded 86 × 571 × 880 mm (W × D × H)	69.555.XXX
Perforated side panel Square perforation 10×10, 38 mm divisions with slots. Design for cabinet housing height 850 mm	755 × 570 mm (H × D)	69.552.XXX
Countertop / cover plate Multiplex 30 mm	1193 × 572 mm (W × D)	69.560.000
Perforated rear panel Square perforation 10 × 10, 38 mm divisions with slots. Usable height: 360 mm	1193 × 550 mm (W × H)	69.553.XXX
Push bar Inc. fastening material for side casing assembly. Galvanised steel. Pipe Ø: 22 mm.	Width: 399mm	12.610.000
Pair of castor supports with rubber castors, 2 swivel castors with brakes and 2 fixed castors. Load capacity: 600 kg. Direction of travel: Transverse.	Ø 160 mm Height: 204 mm	74.079.000





>> see p. 248

Drawer cabinets I with hinged or sliding doors







Drawer cabinets I with hinged or sliding doors





36×27 E







7	600	mm
	7	600

mm	Drawers mm	Pull-out shelves	kg	•	Art. no. 🞇
1020	1×75	2	75	KEY Lock	79.400.XXX
1020	1×75	2	200	KEY Lock	79.402.XXX
1020	2×75	1	75	KEY Lock	79.404.XXX
1020	2×75	1	200	KEY Lock	79.406.XXX
1020	3×75	1	75	KEY Lock	79.408.XXX
1020	3×75	1	200	KEY Lock	79.410.XXX
1020	3×75	2	75	KEY Lock	79.412.XXX
1020	3×75	2	200	KEY Lock	79.414.XXX
1020	4×75	-	75	KEY Lock	79.416.XXX
1020	4×75	-	200	KEY Lock	79.418.XXX
1020	5×75	-	75	KEY Lock	79.420.XXX
1020	5×75	-	200	KEY Lock	79.422.XXX

2× 36×27 E







W → 1430 mm D 7 627 mm

H 1	Drawers mm	Pull-out shelves	kg	6	Art. no. 🔲
1020	2×75	6	75	KEY Lock	79.424.XXX
1020	2×75	6	200	KEY Lock	79.425.XXX
1020	4×75	2	75	KEY Lock	79.426.XXX
1020	4×75	2	200	KEY Lock	79.427.XXX
1020	6×75	2	75	KEY Lock	79.428.XXX
1020	6×75	2	200	KEY Lock	79.429.XXX
1020	8×75	=	75	KEY Lock	79.430.XXX
1020	8×75	=	200	KEY Lock	79.431.XXX
1020	4×75	4	75	KEY Lock	79.432.XXX
1020	4×75	4	200	KEY Lock	79.433.XXX
1020	10×75	-	75	KEY Lock	79.434.XXX
1020	10×75	-	200	KEY Lock	79.435.XXX

■ = load capacity
■ = locking system

Equipment

All drawer cabinets with a height of 1020 mm on these two pages are equipped with: 3 raised sides, 20 mm high, including ribbed mat.





2-way pallet/forklift truck base

Made from sheet steel for screwing to the underside of the housing, black, NCS S 9000-N. **Base cover only** for attaching as a cover on the front or rear.

Base for hinged door cabinet Dimensions (W×D×H mm)	74.061.000 717 × 506 × 100
Cover only, for hinged door cabinet	74.066.000
Base for sliding door cabinet	12.505.000
Dimensions (W \times D \times H mm)	$1430 \times 560 \times 100$
Cover only,	74.070.000





NC tool holders and insert frames see p. 102/103






When ordering a drawer cabinet from these two pages with CODE Lock, please add the suffix "C" or for RFID the suffix "F" to the article number from the table (e.g. **79.456.XXX.C**).

Other locking systems see p. 28–31

36×36 E


Art. no. **79.460.180**

Grey white, RAL 9002







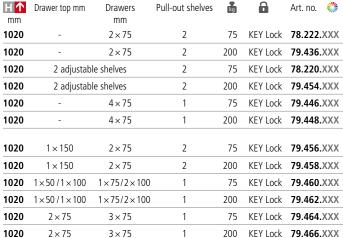





1020	z aujustai	2	75	KET LUCK	70.220.	
1020	2 adjustal	2	200	KEY Lock	79.454.XXX	
1020	-	4×75	1	75	KEY Lock	79.446.XXX
1020	-	4×75	1	200	KEY Lock	79.448.XXX
1020	1×150	2×75	2	75	KEY Lock	79.456.XXX
1020	1×150	2×75	2	200	KEY Lock	79.458.XXX
1020	1×50/1×100	1×75/2×100	1	75	KEY Lock	79.460.XXX
1020	1×50/1×100	1×75/2×100	1	200	KEY Lock	79.462.XXX
1020	2×75	3×75	1	75	KEY Lock	79.464.XXX
1020	2×75	3×75	1	200	KEY Lock	79.466.XXX
1450	-	$2 \times 75 / 1 \times 150$	2	75	KEY Lock	78.256.XXX
1450	-	$2 \times 75 / 1 \times 150$	2	200	KEY Lock	79.468.XXX
1450	3 adjustal	ole shelves	2	75	KEY Lock	78.224.XXX
1450	3 adjustal	ole shelves	2	200	KEY Lock	79.470.XXX
1450	-	2×75/3×150	-	75	KEY Lock	79.472.XXX
1450	-	2×75/3×150	-	200	KEY Lock	79.474.XXX





2-way pallet/forklift truck base

Description see left-hand page

Base for hinged door cabinet Dimensions ($W \times D \times H \text{ mm}$)	74.062.000 717 × 659 × 100		
Cover only, for hinged door cabinet	74.066.000		
Base for sliding door cabinet	12.546.000		
Dimensions (W × D × H mm)	1430×713×100		
Cover only,	74.070.000		



612×612 mm





H 1	Drawers mm	Pull-out shelves	kg	6	Art. no. 🞇
1020	4×75	2	75	KEY Lock	78.259.XXX
1020	4×75	2	200	KEY Lock	79.482.XXX
1020	4 adjustable shelves	2	75	KEY Lock	78.258.XXX
1020	4 adjustable shelves	2	200	KEY Lock	79.485.XXX
1020	4×75	4	75	KEY Lock	79.478.XXX
1020	4×75	4	200	KEY Lock	79.479.XXX



D 77 780 mm

Top-mounted cabinets for drawer cabinets









				Depth 27 E			Depth 36 E	
LISTA	Units		36×27 E	54×27 E	78×27 E	36×36 E	54×36 E	78×36 E
Cabinet	floor area mm							
W-	× D 7		717 × 572 mm	1023 × 572 mm	1431 × 572 mm	717×725 mm	1023×725 mm	1431 × 725 mm
H 1	Clear height mm	Adjustable shelves	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no.
with so	olid sheet hinge	d doors						
1000	930	1	62.637.XXX	62.640.XXX	-	62.636.XXX	62.639.XXX	-
with hi	nged doors wit	h viewing w	vindows					
1000	930	1	-	62.642.XXX	-	<u>-</u>	62.641.XXX	-
with so	olid sheet slidin	g doors						
1000	930	1	-	62.644.XXX	62.646.XXX	-	62.643.XXX	62.645.XXX
with sl	iding doors wit	h viewing w	rindows					
1000	930	1	-	62.648.XXX	62.650.XXX	-	62.647.XXX	62.649.XXX



Multiplex cover panels

To match combination with drawer cabinet depth 36 E (as bottom cabinet) with top-mounted cabinet depth 27 E. Including pre-drilled holes and fastening material.



Adjustable shelves, plain

Adjustable shelves including 4 shelf supports. Specification: steel sheet, galvanised. Long sides folded by $4\times90^\circ$. 30 mm thick, load capacity 60 kg. Adjustable in increments of 25 mm.

Suitable for	36×27 E	54×27 E	78×27 E	36×36 E	54×36 E	78×36 E
	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.
Cover panel, H 20 mm Usable dimensions (W×D mm)	62.695.000 717 × 152	62.696.000 1023 × 152	62.697.000 1431 × 152	-	-	-
Adjustable shelf, H 30 mm Usable dimensions (W×D mm)	62.606.000 695 × 497	62.593.000 1001 × 497	62.607.000 1409×497	62.609.000 695 × 650	62.608.000 1001 × 650	62.610.000 1409 × 650



Locking systems

The standard **KEY Lock** locking system with replaceable cylinders allows easy adaptation to existing locking systems. Further locking systems, e.g. CODE Lock and electronic locking via RFID transponder on request.



Pin hinged doors

Doors are flush with the cabinet housing. Opening angle approx.



Doors with viewing windows

Provide an open view of the contents and also encourage users to keep the contents tidy.




Turn and push cylinder lock and smooth, quiet operation

Cannot be prised out thanks to a bar bent to right angles. The ball bearing rollers of the sliding doors run very quietly on the guide rails.

MORE FLEXIBLE THAN EVER

The new LISTA workshop trolley L3627 has been optimised for you in all of its key features and now offers you even more benefits, functions and improved ergonomics. In addition to even greater load capacities, its flexibility and adaptability make it the perfect solution for every area in the workplace. Because the basic models can be expanded to meet requirements at any time with versatile superstructures and add-ons.





Load capacity 40 kg per drawer, 400 kg housing

Can be utilised to the full

since drawers can be fully extended and drawer shell heights are optimised

+ Absolutely safe to work with

Central locking and single drawer opening protection against accidental opening when in motion

+ Flexibly adaptable

through perforated side and rear panels for holding accessories and tool hooks

Extremely user-friendly
with robust, ergonomic push handle

+ Full mobility

thanks to the smooth-running fixed and swivel castors (two of each) in solid rubber

+ Additional storage space and work surface

through hard-wearing wooden cover or non-slip plastic cover with compartments for small parts

+ Additional safety

through rounded corner pieces made from ABS plastic which act as buffers

Fully compatible with LISTA partition material thanks to the standardised unit of measure

see p. 248



Fully modular and available in a wide range of versions

Depending on use and individual requirements, the basic models can be flexibly expanded in many ways by means of optional accessories.



Fully extendable without crossbar

- load capacity 40 kg
- enables it to be fully extended
- extremely smooth-running with great ease of movement



Labelling

- handle folds upwards
- easy, clean and protected labelling



Partition material

- perforated, slotted drawers hold items firmly in place
- extensive range of partition material in the LISTA measurement unit see p. 248



Single safety catch

- can be operated with one hand
- protects against accidental opening when in motion





Central locking

- a central locking system for all drawers
- secure and easy to use



Smooth-running castors

- two fixed castors
- two swivel castors including brake
- in solid rubber
- with generous Ø 100 mm



Push bar

- robust
- ergonomic
- material: anodised aluminium



Corner pieces

- protect against damage and also protect other workshop equipment or vehicles in the event of accidental contact
- material: ABS plastic
- colour: black, RAL 9005.



Wooden cover

- hard-wearing
- sanded, oiled and waxed surface
- material: Multiplex



Plastic cover

- non-slip
- including compartments for small parts
- material: ABS plastic
- colour: black, RAL 9005.



Perforated side panel


- perforated and slotted for holding accessories and keyhole hooks
- so that everyday tools are always ready to hand




Perforated rear panel

- for fixing to the rear of workshop trolleys
- perforated and slotted for holding accessories and keyhole hooks see p. 162
- ergonomic tool arrangement

Workshop trolley L3627

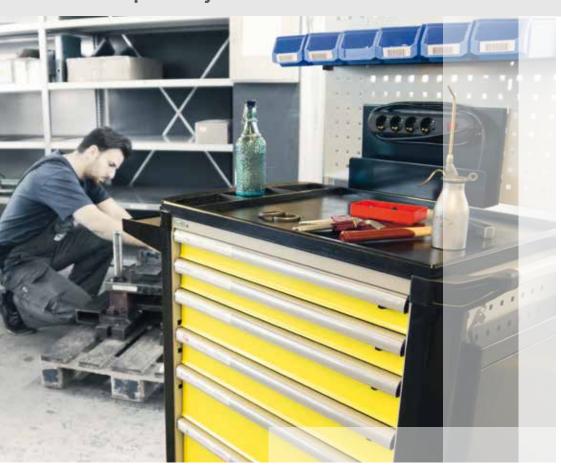











W → 894 mm	D 7 525 mm	H ↑ 928 mm	Equipment to suit size 36×27 E		
612 × 459 mm	Equipment	Number of drawers mm	Net weight kg	Art. no. 🞇	
mull	With wooden cover in	4 : 1×100 / 3×200	74	81.060.XXX	
anada	Multiplex, 40 mm thick, including single safety catch on right	5 : 2×75 / 1×150 / 2×200	78	81.061.XXX	
		6 : 2×75 / 2×100 / 1×150 / 1×200	83	81.062.XXX	
		7 : 4×75 / 2×100 / 1×200	88	81.063.XXX	



With plastic cover including **4**: 1 × 100 / 3 × 200 81.064.XXX 64 single safety catch on right **5**: 2×75 / 1×150 / 2×200 68 81.065.XXX **6**: 2 × 75 / 2 × 100 / 1 × 150 / 1 × 200 81.066.XXX 73 **7**: 4×75 / 2×100 / 1×200 81.067.XXX



With plastic cover and edge protection including single safety catch on right

4 : 1 × 100 / 3 × 200	66	81.068.XXX	
5 : 2×75 / 1×150 / 2×200	70	81.069.XXX	
6 : 2 × 75 / 2 × 100 / 1 × 150 / 1 × 200	75	81.070.XXX	
7 : 4×75 / 2×100 / 1×200	80	81.071.XXX	

Note: Additional equipment e.g. castors, drawer partitions or power outlets on request





drawer partition material see p. 248











Accessories for perforated side panel



Add-on tray

Usable width mm	Usable depth mm	Art. no.
380	310	81 081 000

steel sheet, black, powder coated, including ribbed mat, black



Paper roll holder

for rolls Ø mm	Length mm	Art. no.
400	360	81.058.000

steel sheet, black, powder coated



Spray can holder

Height	Width	Depth	Art. no.
mm	mm	mm	
70	380	74	81.083.000

steel sheet, black, powder coated



Waste container

Content litres	Art. no.
12	81.085.000

steel sheet, black, powder coated



Socket holding plate for Germany

1,5	81.086.000		
Length in metres	Art. no.		

NCS S 9000-N, black. With Smart socket strip 4 × German socket, black.



Socket holding plate for Switzerland

	• •
Length	Art. no.
in metres	
3,0	81.087.000

NCS S 9000-N, black. With Prime-Line socket strip 4 × Swiss socket, black.



Perforated panel with door on right

Height	Width	Depth	Art. no.
mm	mm	mm	
667	380	50	81 084 000

steel sheet, black, powder coated, lockable

Perforated rear panel and accessories



Perforated rear panel

Height mm	Width mm	Art. no.
640	660	81.080.XXX

steel sheet, square holes 10×10 mm, distance between holes 38 mm



Container strip

Width	Art. no.
mm	
665	65.234.06

steel sheet, black, with fixing bracket, load capacity 15 kg, for holding storage containers sizes: 2, 3 and 4 colour: Black



For keyhole hooks and storage containers see p. 162

STRONG AND SAFE

LISTA drawer storage walls are perfect for storing large, heavy single items or a large number of small items and keeping them clearly organised and protected from dust and dirt. All add-ons, drawers, pull-out shelves and adjustable shelves can be freely combined with one another. This enables a wide variety of different types of installation – even inside trucks and containers. The necessary changes can be made simply by reorganising the individual elements. This means that you can adapt your system to new logistics requirements at any time, so that you always have: A Solution to Match Your Needs. With all the benefits of our drawer cabinets.







through robust, sturdy design with a load capacity of up to 5.5 t per shelving unit

Large storage capacity with minimum space requirement

since shelves can be up to 8.50 m high

A wide variety of equipment options with different pull-outs and shelves

Vertical pull-outs for clearer organisation and improved safety at work

as a space-saving and user-friendly solution with direct access to the stored goods from both sides

Heavy-duty pull-outs
with load capacities of up to 350 kg for especially large and heavy items

+ User-friendly

through swing-out and sliding safety ladders for easy access to the upper shelves and drawers

Secure locking
with a choice of roller shutters, hinged doors or spacesaving sliding doors, optionally with viewing windows

Can be adapted to new storage items at any time

through the flexible integration and rearrangement of drawers, pull-out shelves and adjustable shelves in increments of 25 mm

Benefits of LISTA drawer cabinets see p. 38/39

Fully compatible with LISTA partition material thanks to the standardised unit of measure

see p. 248





Separate components

- 1 Side frames
- Rear wall and diagonal brace
- 3 Partition
- 4 Shelf side panel
- 5 Side panel cover
- 6 Universal shelves
- 7 Adjustable shelves
- 8 Dividers
- 9 Drawers
- 10 Fixed and locking shelves
- 11 Pull-out shelves
- 12 Heavy-duty pull-outs
- 13 Side frames for vertical pull-outs*
- 14 Vertical pull-outs*
- 15 Shelves for vertical pull-out*
- 16 Locks for vertical pull-outs*
- 17 Accessories for vertical pull-outs*
- 18 Roller shutters, hinged and sliding doors
- 19 Levelling plates
- 20 Anchoring set
- Safety ladder*
- Accessories for mobile furnishings*
 - * For more information, please contact us.

A wide variety of equipment options



Fully extendable drawers

- load capacity 75 kg or 200 kg
- differential pull-outs without crossbar for perfectly smooth running
- for details see p. 40



Fully extendable pull-out shelves

- load capacity 75 kg or 200 kg
- differential pull-outs without crossbar for perfectly smooth running
- inserts provide flush storage
- pull-out shelves with eyelets for fixing heavy parts on request



Vertical pull-outs

- up to a load capacity of 200 kg (500 kg on request)
- for suspended and protective storage of pre-set tools
- optionally available with storage shelves, adjustable shelves, NC holder attachments and perforated panels



Heavy-duty pull-outs

- up to a load capacity of 350 kg
- extremely smooth running
- wood or steel inserts and ribbed mats are available

Utmost stability and safety





Adjustable and universal shelves, partitions and shelf side panels

- adjustable shelves: load capacity up to 200 kg, can be attached without screws
- universal shelves: up to a load capacity of 250 kg, can be fixed with screws
- optionally either plain or slotted for subdividing with partitions and side panels



Stable side frames

- for shelf heights up to 8.50 m over several storeys
- can be covered with side panel covers
- also available for special inserts and mobile equipment on request



Secure locking

- with lockable hinged doors
- sliding doors and roller shutters on request



Individual configuration options

LISTA drawer storage walls are available in two depths and can be configured to suit your exact individual requirements. The LISTA Unit enables all individual parts, drawers and partition materials to be freely combined with one another and quickly and easily replaced or added to.

Typical configurations




Installed depth 553 mm

- ideal for locations with limited available space
- preferred system for use inside containers
- reduced depth makes it easy to remove heavy parts



Installed depth 706 mm

- maximum flexibility through large selection of products and accessories
- allows vertical pull-outs and heavy-duty pull-outs to be used
- available in five different widths



Flexible range of applications



Mobile equipment

in containers and trucks



Medicine storage

• well-organised and within reach

User-friendly







Safety ladders


• can be swung out and moved sideways for easy access to the upper shelves and drawers

Dimensions and load capacities

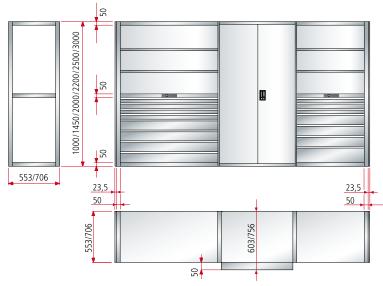

G = Unit length (without side panels) Unit length (with side panels) = sum of installed widths + sum of side frames = sum of installed widths + sum of side frames + 47 mm



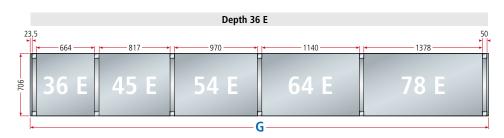

Unit widths for depth 27 E and 36 E


W LISTA Units	36 E 45 E		54 E	64 E	78 E	
Installed widths mm	664	817	970	1140	1378	
Side frames	50	50	50	50	50	
Side panel cover	23,5	23,5	23,5	23,5	23,5	

Configure and order drawer storage walls individually



- Select floor area of storage wall
 W × D (e.g.: 664 × 706 mm = 36 × 36 E)
- LISTA Unit E × E = measurement unit for selecting side frames, stabilising elements, shelves, drawers and hinged doors





- Select height of side frames H
- Select stabilising elements: rear panel or diagonal brace
- Floor anchor, drawer storage walls must be anchored
- Optional: levelling plates, frame pillar top covering, intermediate fill-in strip, side panel covers and partitions



2. Universal, locking and fixed shelves

- Depending on the height of the unit, a minimum number of universal shelves are necessary – please refer to the table
- Fixed and locking shelves including locking systems are used when drawers need to be lockable. Here, the universal shelves can be dispensed with entirely or used as a top shelf for the top of the side frames.






Diagonal brace arrangement

The load capacities only apply for six shelf units or more two shelf units or at least every fifth shelf unit has rear panels or every third shelf unit has a diagonal brace. From a unit height of 2200 mm an additional universal shelf is required as an intermediate shelf. In the case of two-storey systems, the lower story in every third unit must be fitted with a diagonal brace or rear panel.

Anchoring rule

All drawer storage walls must be anchored. 1 anchor is included for each side frame. Exception: double-sided drawer storage walls which are screwed together back-to-back do not need to be anchored.

Note: when using only one mounting fixture per side frame, it must be attached to the rear.

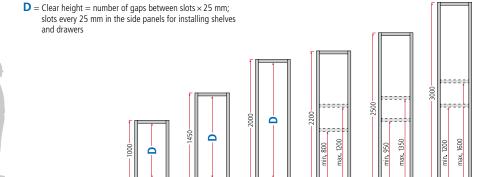

Wall heights and load capacities

H mm	1000	1450	2000	2200	2500	3000	
Clear height D mm	900	1350	1900	2050	2350	2850	
Load capacity per shelving section							
min. number of universal shelves	2	2	2	3	3	3	
min./max. installed height for the middle universal shelves from floor (mm)	-	-	-	900-1300	1050-1450	1300-1700	
load capacity per shelving section	5500 kg	5000 kg	4500 kg	5500 kg	5250 kg	5000 kg	





3. Fitments

- Selection of adjustable shelves, drawers, pull-out shelves and heavy-duty pull-out shelves as desired
- Optional: dividers for adjustable shelves, slotted
- Optional: partition material see p. 248



- Lockable hinged doors over partial and total height
- Sliding doors, roller shutters on request

- In order to comply with regulations and for reasons of safety, drawer storage walls must consist of at least the following elements:
 - Side frames
 - Floor anchoring
 - Rear panels OR diagonal braces
 - Universal shelves (plain or slotted)



Drawer storage walls I heavy-duty versions





Standard colour combination:





Housing/shelves: light grey, RAL 7035 Fronts: light blue, RAL 5012

Additional colours available on request.



Art. no. **70.653.000** Housing and shelves: light grey, RAL 7035 Fronts: light blue, RAL 5012



Art. no. 70.657.000 Housing and shelves: light grey, RAL 7035 Fronts: light blue, RAL 5012

54×36 E















918×612 mm



Specification



Basic unit Art. no.

Add-on unit Art. no.



3 universal shelves,

2 adjustable shelves,

2 pull-out shelves (200 kg),

1 rear panel,

(only for basic unit)

2 side panels

70.653.000

70.654.000



3 universal shelves,

2 adjustable shelves,

200 / 250 / 300 mm)

2 side panels

(only for basic unit)

4 drawers (150 /

1 rear panel,

KEY Lock 70.655.000 70.656.000



3 universal shelves,

2 adjustable shelves, 7 drawers (50* /

75 / 100 / 125 / 150 /

 2×200 mm)

1 rear panel, 2 side panels

(only for basic unit)

KEY Lock 70.657.000

70.658.000



3 universal shelves,

2 adjustable shelves,


2 pull-out shelves (75 kg), 1 hinged door (H 1000 mm)


1 rear panel,

(only for basic unit)

2 side panels

KEY Lock 70.651.000 70.652.000









Universal and adjustable shelves

The universal shelves (load capacity 250 kg) are screwed to the side frames. The adjustable shelves (load capacity 200 kg) are attached to the side frames by means of shelf supports and can be adjusted for height.


Usable dimensions: W 970 × D 701 mm.



Pull-out shelves

For the storage of heavy items and assemblies which can be stored flush with the handle by using a sheet metal insert. Fully extendable. Load capacity 75 or 200 kg. Height-adjustable in 25 mm increments.

Drawer storage walls I side frames, stabilising elements

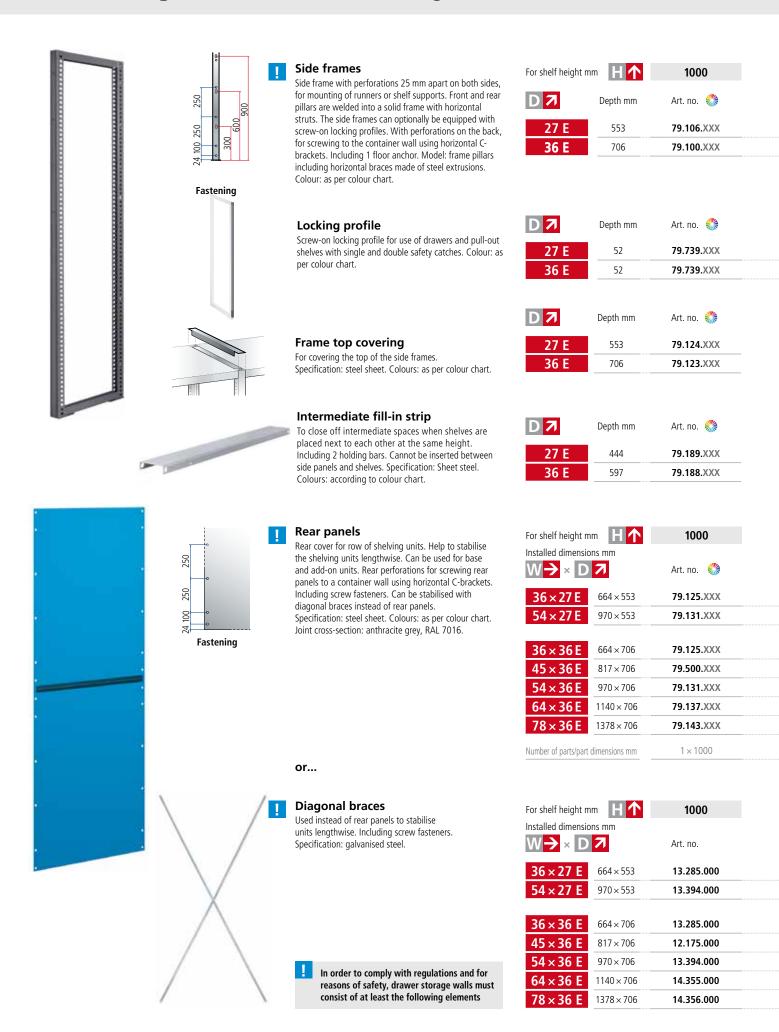



1450	2000	2200	2500	3000
Art. no. 🞇				
79.107.XXX	79.108.XXX	79.109.XXX	79.110.XXX	79.111.XXX
79.101.XXX	79.102.XXX	79.103.XXX	79.104.XXX	79.105.XXX

Level	lıng	ы	ates
To come	ancata	o fo	r haiaht

To compensate for height. Enable units to be aligned with precision on uneven floors. Specification: PVC. Colour: grey.



79.740.XXX	79.741.XXX	79.742.XXX	79.743.XXX	79.744.XXX
79.740.XXX	79.741.XXX	79.742.XXX	79.743.XXX	79.744.XXX
Art. no. 🞇				

.evel	ling	plates
tari atau		4

Thickness 1 mm	17.140.000	
Thickness 2 mm	17.141.000	
Thickness 4 mm	17.142.000	
Dimensions (W×D mm)	60×134	





Floor anchoring

Drawer storage walls must be anchored (except for drawer storage walls which are screwed together back-to-back). 1 anchor is included for each side frame.

Floor anchor

M 10/130 112.991.000

1450	2000	2200	2500	3000
Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
79.126.XXX	79.127.XXX	79.128.XXX	79.129.XXX	79.130.XXX
79.132.XXX	79.133.XXX	79.134.XXX	79.135.XXX	79.136.XXX
79.126.XXX	79.127.XXX	79.128.XXX	79.129.XXX	79.130.XXX
79.501.XXX	79.502.XXX	79.503.XXX	79.504.XXX	79.505.XXX
79.132.XXX	79.133.XXX	79.134.XXX	79.135.XXX	79.136.XXX
79.138.XXX	79.139.XXX	79.140.XXX	79.141.XXX	79.142.XXX
79.144.XXX	79.145.XXX	79.146.XXX	79.147.XXX	79.148.XXX
1×1000, 1×450	2×1000	1×1000, 1×1200	2×1000, 1×500	3×1000

Rear panels with 10×10 mm square holes and 38 mm divisions for holding keyhole hooks available on request.

1450	2000	2200	2500	3000
Art. no.				
13.285.000	13.285.000	13.285.000	13.285.000	13.285.000
13.589.000	13.589.000	13.589.000	13.589.000	13.589.000
13.285.000	13.285.000	13.285.000	13.285.000	13.285.000
12.222.000	12.222.000	12.222.000	12.222.000	12.222.000
13.589.000	13.589.000	13.589.000	13.589.000	13.589.000
13.286.000	13.287.000	13.287.000	13.287.000	13.287.000
13.287.000	13.554.000	13.554.000	13.554.000	13.554.000







Drawer storage walls I panels and shelves



Side panel covers

Side cover for row of shelving units. For hanging on the side frames by means of shelf supports. Including floor anchor. Specification: steel sheet. Colours: as per colour chart.

For shelf height m	ım H 🔨	1000
D 7	Depth mm	Art. no. 🞇
27 E	553	13.388.XXX
36 E	706	13.252.XXX
Number of parts/o	crossbars	1
Dimensions (W m	m)	23,5

Partitions

For retrofitting by hanging in the side frames. Serves to protect against theft, especially behind sliding doors, hinged doors and roller shutters. Can be used on left and right. Specification: steel sheet.

Colours: as per colour chart.

N.B. Remember to order a nut holder for fastening the shelf.

For shelf height m	nm H 1	1000
D 7	Depth mm	Art. no. 🞇
27 E	553	79.176.XXX
36 E	706	79.170.XXX
Number of parts/o	crossbars	1

Shelf side panels

Used to cover a side end where an intermediate fill-in strip cannot be used to close an intermediate space. Attached to the side frames. Can also be used with folding fronts. Model: Sheet steel. Colour: Light grey, RAL 7035.

Delivery: as a pair (left and right version)

* Min. clear height mm of compartment equals height + 50 mm.



Installed dimensions mm



Folding fronts

Can only be used with universal shelves. Fold 180 degrees downwards. Equipment: Double safety catch, labelling strip throughout, handle covers and self-adhesive labels. Colours: according to colour chart.

Η <mark>↑</mark>	min. clear opening (mm)	Art. no.	
150	125*	79.298.XXX	
200	175*	79.299.XXX	
250	225*	79.300.XXX	
300	275*	79.301.XXX	
Usable widt	h (mm)	250	

Depth 27 E 36 × 27 E

664×553



Universal shelves, plain or slotted

Screwed to the side frames as top and bottom closure and intermediate shelf. Including screw fasteners. Choice of plain or slotted versions. Slots 15 mm apart for subdividing partitions. Specification: steel sheet. Colours: as per colour chart.

Universal shelf, H 50 mm			
plain	79.191.XXX		
Load capacity (kg)	250		
slotted	79.197.XXX		
Load capacity (kg)	250		
Usable dimensions (W × D mm)	664×552		

Adjustable shelves, plain or slotted

Are inserted between the side frames using shelf supports, with welded strengthener. Choice of plain or slotted versions. Slots 15 mm apart for subdividing with partitions. Including 4 shelf supports each. Specification: steel sheet. Colours: as per colour chart.

Adjustable sneit, H 25 mm		
plain	79.203.XXX	
Load capacity (kg)	200	
slotted	79.209.XXX	

Load capacity (kg) 200
Usable dimensions (W×D mm) 664×548

Partitions

To subdivide the slotted universal and adjustable shelves. Specification: steel sheet. Colour: light grey, RAL 7035.

 Wall height mm
 H
 95

 Depth mm
 Art. no.

 27 E
 525
 123.716.000

 36 E
 678
 100.434.000



1450	2000	2200	2500	3000
Art. no. 🞇				
13.389.XXX	13.390.XXX	13.391.XXX	13.392.XXX	13.393.XXX
13.253.XXX	13.254.XXX	13.255.XXX	13.256.XXX	13.257.XXX
1	1	1	2	2
23,5	23,5	23,5	23,5	23,5

Side panel covers with 10×10 mm square holes and 38 mm divisions for holding keyhole hooks available on request.

1450	2000	2200	2500	3000
Art. no.	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
79.177.XXX	79.178.XXX	79.179.XXX	79.180.XXX	79.181.XXX
79.171.XXX	79.172.XXX	79.173.XXX	79.174.XXX	79.175.XXX
1	1	2	2	3

Partitions with 10×10 mm square holes and 38 mm divisions for holding keyhole hooks available on request.

200	250
Art. no.	Art. no.
79.015.000	79.016.000
79.012.000	79.013.000



Nut holder

For fastening shelves into units where there is no access to the side frames. 2 each per shelf next to partition. Specification: steel sheet, bright galvanised.

L 55 mm, 1 piece **16.997.000**





			Depth 36 E		
54 × 27 E	36×36 E	45 × 36 E	54×36 E	64×36 E	78×36 E
970×553	664×706	817×706	970×706	1140×706	1378×706
Art. no. 🎇	Art. no. 🞇	Art. no.	Art. no.	Art. no. 🞇	Art. no. 🛚 🞇
79.302.XXX	79.298.XXX	79.542.XXX	79.302.XXX	79.306.XXX	79.310.XXX
79.303.XXX	79.299.XXX	79.543.XXX	79.303.XXX	79.307.XXX	79.311.XXX
79.304.XXX	79.300.XXX	79.544.XXX	79.304.XXX	79.308.XXX	79.312.XXX
79.305.XXX	79.301.XXX	79.545.XXX	79.305.XXX	79.309.XXX	79.313.XXX
250	250	250	250	250	250
79.193.XXX	79.190.XXX	79.514.XXX	79.192.XXX	79.194.XXX	79.195.XXX
450	250	250	475	400	350
79.199.XXX	79.196.XXX	79.515.XXX	79.198.XXX	79.200.XXX	79.201.XXX
250	250	250	250	400	350
970×552	664×705	817×705	970×705	1140×705	1378×705
79.205.XXX	79.202.XXX	79.516.XXX	79.204.XXX	79.206.XXX	79.207.XXX
200	200	200	200	200	200
79.211.XXX	79.208.XXX	79.517.XXX	79.210.XXX	79.212.XXX	79.213.XXX
200	200	200	200	200	200
970×548	664×701	817×701	970×701	1140×701	1378×701

145	195
Art. no.	Art. no.
123.717.000	123.718.000
100.435.000	100.436.000



In order to comply with regulations and for reasons of safety, drawer storage walls must consist of at least the following elements $\frac{1}{2} \left(\frac{1}{2} \right) = \frac{1}{2} \left(\frac{1}{2} \right) \left(\frac$

Drawer storage walls I drawers, locking and fixed shelves







Select load capacity

When ordering a single safety catch on the right, please add the suffix "R" to the article number in the table (e.g. 72.034.XXX.R).

Drawers

Drawers with different front heights can be incorporated into the same shelf unit in any order. The insides of the drawer walls are all fitted with a slotted grid in units (E) of 17 mm so that each drawer can be partitioned as required.

Ordering information

When selecting the drawers, the clear height of the wall defines the maximum size. The sum of the drawer front heights (C) must be equal to the clear height (B) (see diagram). For filling and loading the drawers and drawer walls please follow the installation manual and observe the loading rules. Load capacity applies to an evenly distributed load.



75 kg **Load capacity**



Depth 27 E

36 × 27 E

Jiawei usabie suriace iiiiii							
W <mark>→</mark>	×	D	7				

612 × 459 mm

mm 50*	Usable height 32,5	Shell height 28,5	Art. no. *** 72.042.XXX	
75	57,5	49	72.043.XXX	
100	82,5	76	72.045.XXX	
125	107,5	76	72.047.XXX	
150	132,5	126	72.049.XXX	
200	182,5	176	72.051.XXX	
250	232,5	226	72.053.XXX	
300	282,5	276	72.055.XXX	

200

200 kg Load capacity

75	57,5	49	72.044.XXX
100	82,5	76	72.046.XXX
125	107,5	76	72.048.XXX
150	132,5	126	72.050.XXX
200	182,5	176	72.052.XXX
250	232,5	226	72.054.XXX
300	282 5	276	72.056.XXX



Locking and fixed shelves

Locking and fixed shelves are screwed to the side frames at any position and are ready to accept the installation of drawer locking systems. Including screw fasteners. Specification: steel sheet. Colours: as per colour chart.

Installed dimensions mm



664 × 553 mm

Depth 27 E

36 × 27 E

Locking shelf prepared for locking system

H 50 mm, load capacity 200 kg

Art. no. 🞇 79.243.XXX

Fixed shelf

prepared for locking system

H 50 mm, load capacity 50 kg

79.237.XXX



The central locking system for installation into the locking shelf only locks all drawers beneath it. Choice of configurable KEY Lock or CODE Lock locking systems.

Locking for entire height on request.



KEY Lock locking system including cylinder with different keys and with locking bar

ΗT	mm	Art. no.
1000	900	19.220.000
1150	1050	19.221.000
1325	1225	19.222.000
1450	1350	19.223.000



When ordering a lock with CODE, RFID or AUTO Lock, please add the suffix "C", "F" or "A", respectively, to the article number stated in the table (e.g. 19.220.000.C).











Depth 36 E $45 \times 36 E$ 54×36 E $64 \times 36 E$ 918 × 459 mm 612×612 mm $765 \times 612 \text{ mm}$ 918 × 612 mm 1088 × 612 mm 1326 × 612 mm Art. no. Art. no. 🞇 Art. no. 🗱 Art. no. 🗱 Art. no. 🞇 Art. no. 🞇 72.080.XXX 72.057.XXX 72.088.XXX 72.806.XXX 72.072.XXX 72.805.XXX 72.505.XXX 72.058.XXX 72.540.XXX 72.510.XXX 72.515.XXX 72.517.XXX 72.506.XXX 72.060.XXX 72.541.XXX 72.511.XXX 72.516.XXX 72.518.XXX 72.507.XXX 72.062.XXX 72.542.XXX 72.512.XXX 72.508.XXX 72.064.XXX 72.543.XXX 72.513.XXX 72.509.XXX 72.544.XXX 72.514.XXX 72.066.XXX 72.068.XXX 72.070.XXX * Drawers with a front height of 50 mm must be placed in the top position 72.081.XXX 72.059.XXX 72.073.XXX 72.089.XXX 72.096.XXX 72.103.XXX 72.082.XXX 72.061.XXX 72.074.XXX 72.090.XXX 72.097.XXX 72.104.XXX 72.083.XXX 72.063.XXX 72.075.XXX 72.091.XXX 72.098.XXX 72.105.XXX 72.084.XXX 72.065.XXX 72.076.XXX 72.092.XXX 72.099.XXX 72.106.XXX 72.077.XXX 72.107.XXX 72.085.XXX 72.067.XXX 72.093.XXX 72.100.XXX

	Depth 36 E						
54 × 27 E	36×36 E	45 × 36 E	54×36 E	64×36 E	78×36 E		
970×553 mm	664×706 mm	817×706 mm	970×706 mm	1140×706 mm	1378×706 mm		
Art. no. 🧩	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇		
79.245.XXX	79.242.XXX	79.550.XXX	79.244.XXX	79.246.XXX	79.247.XXX		
79.239.XXX	79.236.XXX	79.549.XXX	79.238.XXX	79.240.XXX	79.241.XXX		

72.094.XXX

72.095.XXX

72.101.XXX

72.102.XXX

Art. no.						
19.220.000	19.200.000	19.200.000	19.200.000	19.200.000	19.200.000	
19.221.000	19.201.000	19.201.000	19.201.000	19.201.000	19.201.000	
19.222.000	19.202.000	19.202.000	19.202.000	19.202.000	19.202.000	
19.223.000	19.203.000	19.203.000	19.203.000	19.203.000	19.203.000	



KEY Lock

72.086.XXX

72.087.XXX

72.069.XXX

72.071.XXX

The standard locking system with replaceable cylinders makes it easy to adapt to existing locking systems. The locking system secures all drawers simultaneously.



72.078.XXX

72.079.XXX

CODE Lock

Here the key is replaced by a simple numeric combination. A simple four to six-digit numeric combination is sufficient to open the drawer.



RFID Lock

The LISTA RFID Lock enables automatic and contactless locking through radio frequency identification. After a positive RFID read a rotary handle must be turned by hand to unlock.



72.108.XXX

72.109.XXX

AUTO Lock

Like LISTA RFID Lock, opens and locks the cabinet automatically without manual operation. Access and locked time management with LISTA Access software via USB.





Pull-out shelves

For storing heavy individual items and equipment. Variable fitting heights of 25×25 mm in the side panels. The inserts enable stored items to be stored and removed flush with the handle.

Specification: steel sheet.

Colours: as per colour chart. Bottom inserts are made of galvanised steel.



Heavy-duty pull-outs

Heavy-duty pull-outs are mainly used in machine tool production for storage of assemblies and tools. Even with a heavy load, the heavy-duty pull-out is easy to use. With a welded construction and pull-out frames running on multiple ball-bearings. The runners can be built directly into the side ball-bearings of the drawer walls of sizes 54×36 E without any adjustments. Specification: Shaped steel sheet. Colour: Grey, NCS S 4502-R.



Inserts and supports for heavy-duty pull-out shelves

Multiplex top: Can be inserted without screwing into the heavy-duty pull-out shelves. Made of steamed beech veneers, glued in multiple waterproof layers, rounded corners. Sanded, oiled and waxed surface. The top is splash-proof, dirt-repellent and largely proof against oil and grease.

Slat inserts: can be inserted without screwing into the heavy-duty pull-out shelves. Specification: Sendzimir galvanised shaped sheet steel.

Ribbed mats: provide protection. To be placed on top of the wooden inserts or on the metal slat insert panels. Specification: includes self-adhesive strips. Colour: Black.

Depth 27 E

36 × 27 E



612 × 459 mm

Pull-out shelves

	min. installation height mm	Art. no. 🞇
75	75	79.219.XXX
200	75	79.223.XXX

Heavy-duty pull-outs, H 155 mm

Load ca-	min. installation
pacity kg	height mm
350	215

Usable dimensions (W × D mm)

Multiplex top, H 50 mm

Usable dimensions (W × D mm)

Slat inserts, H 54,5 mm

Number of slats

Usable dimensions (W × D mm)

Ribbed mats, H 3 mm

Usable dimensions (W × D mm)



Hinged doors made of full sheet steel or equipped with viewing windows

With two panels and a two-point rod lock with a recess for a clasp lock. The hinged doors can be retrofitted to all shelf units. Specification: sheet steel or sheet steel with viewing windows. Colours: as per colour chart.



For the version with **hinged doors**, the **clasp lock** shown below must be ordered separately.

Clasp locks

The standard KEY Lock locking system with replaceable cylinders makes it easy to adapt to existing locking systems. With CODE Lock, the key is replaced by a simple numeric combination. The LISTA RFID Lock enables automatic and contactless locking through radio frequency identification. After a positive RFID read the handle is operated by hand.





36×27 E

For shelf For height mm fitting

Art. no.



Hinged doors made of full sheet steel, 2 doors without clasp lock, with different keys

1000	bottom	79.248.XXX
1000	top	79.521.XXX
2000	bottom	79.249.XXX
2200	bottom	79.250.XXX
2500	bottom	79.251.XXX

Hinged doors with viewing windows, 2 doors without clasp lock, with different keys

2500	bottom	79.634.XXX
2200	bottom	79.633.XXX
2000	bottom	79.632.XXX
1000	top	79.631.XXX
1000	bottom	79.630.XXX

+ clash lock with different keys

with KEY Lock	49.060.000
with CODE Lock	49.085.000
with RFID Lock	49.086.000



			Depth 36 E		
54 × 27 E	36×36 E	45 × 36 E	54×36 E	64×36 E	78×36 E
918 × 459 mm	612×612 mm	765 × 612 mm	918×612 mm	1088 × 612 mm	1326 × 612 mm
Art. no. 🧩	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no.	Art. no. 🞇
79.221.XXX	79.218.XXX	79.519.XXX	79.220.XXX	-	-
79.225.XXX	79.222.XXX	79.520.XXX	79.224.XXX	79.226.XXX	79.227.XXX
-	79.228.000	79.617.000	79.229.000	79.618.000	79.619.000
	588×614	741×614	894×614	1064×614	1302×614
-	12.514.000	12.640.000	12.515.000	12.641.000	12.642.000
	588×614	741×614	894×614	1064×614	1302×614
-	12.519.000	12.643.000	12.520.000	12.644.000	12.645.000
	4	4	4	4	4
	588×614	741×614	894×614	1064×614	1302×614
-	12.516.000	12.646.000	12.517.000	12.647.000	12.648.000
	588×614	741×614	894×614	1064×614	1302×614
54×27 E	36×36 E	45×36 E	54×36 E	64×36 E	78×36 E
Art. no. 🞇	Art. no. 🞇	Art. no.	Art. no.	Art. no. 🞇	Art. no.
70 2F2 VVV	70 240 VVV	70 F33 VVV	70.252.VVV	70 F20 VVV	70 F22 VVV
79.252.XXX 79.527.XXX	79.248.XXX 79.521.XXX	79.522.XXX 79.523.XXX	79.252.XXX 79.527.XXX	79.528.XXX 79.529.XXX	79.533.XXX 79.534.XXX
79.253.XXX	79.249.XXX	79.524.XXX	79.253.XXX	79.530.XXX	79.535.XXX
79.254.XXX	79.250.XXX	79.525.XXX	79.254.XXX	79.531.XXX	79.536.XXX
79.255.XXX	79.251.XXX	79.526.XXX	79.255.XXX	79.532.XXX	79.537.XXX
79.640.XXX	79.630.XXX	79.635.XXX	79.640.XXX	79.645.XXX	79.650.XXX
79.641.XXX	79.631.XXX	79.636.XXX	79.641.XXX	79.646.XXX	79.651.XXX
79.642.XXX	79.632.XXX	79.637.XXX	79.642.XXX	79.647.XXX	79.652.XXX
79.643.XXX	79.633.XXX	79.638.XXX	79.643.XXX	79.648.XXX	79.653.XXX
79.644.XXX	79.634.XXX	79.639.XXX	79.644.XXX	79.649.XXX	79.654.XXX
49.060.000	49.060.000	49.060.000	49.060.000	49.060.000	49.060.000
49.085.000	49.085.000	49.085.000	49.085.000	49.085.000	49.085.000



PROFESSIONALS AT WORK

NC storage and transport systems made by LISTA give you the perfect solution for your tool logistics. Our NC modules not only provide professional storage in inserts specially optimised for your machining and cutting tools, but also a safe method of transporting them. Tools are stored in a space-saving and organised way and are always within reach and ready for use. That's not all: our NC modules can be individually equipped and can of course be freely combined with the entire LISTA system in order to make the best possible use of the valuable space in your production facility.



+ Safe, neat and orderly storage

in high-quality inserts made from break-proof, impact-proof and oil-resistant ABS material tailored to hold your cutting tools

Optimum use of space

because these high-capacity systems are not only space-saving, but the tools are just where you need them – right next to the machine

Customised and easy to assemble using tool holders with snap fasteners for tool-free insertion and removal

- Secure transport
 thanks to robust and stable design
- User-friendly and ergonomic
 because tool holders can be fitted at an angle
 and shelves and drawers can be pulled out
- Benefits of the LISTA drawer cabinets see p. 38/39




Partitioning schemes for NC tool containers

The capacity of each of the different storage and transport units for NC tools is given in the table below. The partitioning scheme for each type of tool is given next to the corresponding article number. With this scheme you can use the table to calculate the maximum capacity for each storage and transport unit used.

Insert frames in drawers and NC transport units

Units (E)	Dimensions mm (W×D)	А	В	D	Е	F	G	Н
36×27 E*	612×459	27	24	21	18	15	12	3
54×27 E	918×459	42	39	33	27	24	21	-
36×36 E*	612×612	36	32	28	24	20	16	4





Tool cradles for NC cabinets and NC transport units

suitable for Width (E)	Dimensions mm (W × D)	А	В	D	Е	F	G	Н
36 E*	562×140	9	8	7	6	5	4	1
54 E**	946×140	16	14	12	10	8	7	_

* for NC transport trolleys and vertical pull-out cabinets (see p. 190) ** for NC cabinets



NC bench stand


With insert frame for 3 strips.

Units (E)	Dimensions mm (W × D)	А	В	D	E	F	G	Н
36×27 E	588×413×345	27	24	21	18	15	12	3




Version with pair of frame supports


LISTA frame supports for NC systems have adjustable ranges with three positions so that the height can be variably adjusted to match the items stored. The distance from the insert frame to the top of the tool holder is always 12 mm.



For storage heights 82 - 102 mm (27 E and 36 E)




For storage heights 127-162 mm (27 E and 36 E)



For storage heights 187-222 mm (27 E and 36 E)

NC storage in vertical pull-outs






NC storage in transport units



NC storage in bench stand




NC storage in drawers




Version with tool cradles

LISTA tool cradles for NC systems are available in two heights The distance from the cradle to the top of the tool holder is always 12 mm.

For storage heights 96-135 mm (27 E and 36 E)







NC storage in cabinets


NC storage and transport systems I NC tool holders

NC tool holder system

With this system a number of versions are available for different tools and can be fitted in a support in any combination. The holders are screwed together or fixed by means of snap fastener. Specification: high-quality plastic. Colour: red.



Note
HSK tool holders are available in green on request. The red and green tool holders are required to differentiate between sharp and used tools.



>>> Partitioning schemes see p. 101



ISO-SK tool holders

Specification	Width mm	Height mm	Cone Ø top mm	Number of tools per holder	Partitioning schemes	Art. no.
ISO-SK 30	65,6	49	31,8	1	В	12.880.000
ISO-SK 40	65,6	60,5	44,5	1	В	12.062.000
ISO-SK 45	105	75	57,2	1	F	12.877.000
ISO-SK 50	105	90	69,9	1	F	12.875.000



HSK tool holders

Specification	Width mm	Height mm	Cone Ø top mm	Number of tools per holder	Partitioning schemes	Art. no.
HSK 32 A+C+E/40 B+D+F	58	31	24	1	Α	15.314.000
HSK 40 A+C+E/50 B+D+F	58	31	30	1	А	15.318.000
HSK 50 A+C+E/63 B+D+F	65,6	31	38	1	В	15.319.000
HSK 63 A+C+E/80 B+D+F	87,5	34	48	1	E	15.320.000
HSK 80 A+C+E/100 B+D+F	105	42	60	1	F	15.330.000
HSK 100 A+C+E/125 B+D+F	120	52	75	1	G	15.336.000

 $\label{thm:continuous} \mbox{Tool holders for HSC hollow shaft cylinders are available on request.}$



VDI tool holders

Specification	Width mm	Height mm	Cylindrical hole Ø mm	Number of tools per holder	Partitioning schemes	Art. no.
VDI 20 cylindrical*	58	20	20,5	1	Α	15.329.000
VDI 25 cylindrical*	58	20	25,4	1	А	12.866.000
VDI 30 cylindrical	65,6	69,5	30,5	1	В	12.887.000
VDI 40 cylindrical	87,5	77,5	40,5	1	E	12.886.000
VDI 50 cylindrical	87,5	93,5	50,0	1	E	12.885.000
VDI 60 cylindrical	105	108,5	60,5	1	F	12.884.000

*Screwed, see tool holders to drill out yourself.






Specification	Width mm	Height mm	Cone Ø top mm	Number of tools per holder	Partitioning schemes	Art. no.
Capto C3	58	31,5	22	1	Α	12.650.000
Capto C4	58	31,5	28	1	А	12.651.000
Capto C5	65,6	31,5	35	1	В	12.652.000
Capto C6	87,5	34	44	1	E	12.653.000
Capto C8	105	42	55	1	F	12.654.000
Capto C10	120	52	72	1	G	12.655.000

Tool holders to drill out yourself

For any tools.



*Screwed.

^{*} Explanation of "screwed": screwed tool holders are screwed onto the insert frame or the tool cradle frame with 1 or 2 allen screws.



Insert frame and pairs of frame supports

Available as a set or as individual components. One pair of frame supports is needed for each insert frame. By having frame supports in different heights which can be screwed onto the perforated drawer base together with the insert frame, tools with different cone lengths can be stored in drawers.



Adjustable ranges seé p. 101

see p. 101





Ordering information

Always take into account the maximum storage height of the tools including any fitting pins.



Insert frame for drawers

To accommodate all types of tool holder. One pair of frame supports is needed for each insert frame. Including screw fasteners. Without pair of frame supports. Specification: steel sheet. Colour: grey, NCS S 4502-B.

For drawer sizes Unit (E)	Number of rows	Width mm	Depth mm	Height mm	Art. no.
36×27 E	3	584	447	64	12.846.000
54×27 E	3	890	447	64	12.243.000
36×36 E	4	584	596	64	12.848.000



Pair of frame supports for insert frame

The position of the insert frames can be adjusted for height. Not necessary for tools with a height of less than 64 mm. Including screw fasteners. Specification: steel sheet. Colour: grey, NCS S 4502-B.

For depth (E)	Specification	Height mm	Cone length mm	Art. no.
27 E	447/60 – 110	60-110	80-160	12.907.000
For insert frames 12.846.00	00, 12.243.000.			
36 E	596/60-110	60-110	80-160	12.904.000





Tool holder sets 36 × 27 E

For inserting into drawers. Includes 1 insert frame, 1 pair of frame supports Art. no. 12.907.000. Width 588 mm, depth 447 mm, height 82-162 mm.

Equipped with	Partitioning schemes	Art. no.
24 holders ISO-SK 40	В	80.824.000
15 holders ISO-SK 50	F	80.825.000
24 holders HSK 50 A+C+E/63 B+D+F	В	80.827.000
18 holders HSK 63 A+C+E/80 B+D+F	E	80.828.000



Tool holder sets 36 × 36 E

For inserting into drawers. Includes 1 insert frame, 1 pair of frame supports Art. no. 12.904.000. Width 588 mm, depth 596 mm, height 82–162 mm.

Equipped with	Partitioning schemes	Art. no.
32 holders ISO-SK 40	В	80.829.000
20 holders ISO-SK 50	F	80.830.000
32 holders HSK 50 A+C+E/63 B+D+F	В	80.832.000
24 holders HSK 63 A+C+E/80 B+D+F	E	80.833.000





NC storage and transport systems | preconfigured



Ε

78.975.XXX

including single-drawer opening system

NC cabinet	s with roller shutte	ers		
W → 1038 mm	D 7 691 mm H 19	50 mm	Specification	to suit size 54×27 E
918×459 mm	Specification	Holder type	Partitioning schemes	Art. no. 🞇
	4 Drawers (front height 75 mm,	without tool holder	-	78.971.XXX
	load capacity 200 kg), 4 Insert frames including pair of frame supports, Art. no. 12.907.000,	156 holders ISO-SK 40	В	78.972.XXX
		96 holders ISO-SK 50	F	78.973.XXX



Fully extendable drawers

- load capacity 200 kg
- perfectly smooth running through differential pull-out without a crossbar
- details see p. 40



8 Tool cradle	without tool holder	_	15.315.XXX	
8 Pair of frame supports, at an angle of 15°, Art. no. 12.047.000	112 holders ISO-SK 40	В	15.635.XXX	
	64 holders ISO-SK 50	F	15.636.XXX	
	80 holders HSK 63 A+C+E/80 B+D+F	Е	18.395.XXX	

108 holders HSK 63


A+C+E/80 B+D+F




4 Tool cradle, without tool holder 15.317.XXX 2 Drawers (front heights 100 / 150 mm, 56 holders ISO-SK 40 В 15.639.XXX load capacity 200 kg), 32 holders ISO-SK 50 15.640.XXX F 1 Pull-out shelves (200 kg), 40 holders HSK 63 including single-drawer opening system Ε 15.962.XXX A+C/80 B+D



- insert frames can be used in cabinets,
- tool cradles horizontal or at a slight incline, can easily be attached to vertical pull-outs, table stands, transport units and cabinets without screws
- for quick and safe access











NC transport unit





Specification

- 1 rack on the front, including PVC ribbed mat,
- 1 insert frame with pair of frame supports,
- 2 tool cradle with pair of frame supports, angled 15°


wheel diameter Ø 160 mm, rubber castors, load capacity 540 kg

Holder type	Partitioning schemes	Art. no.
without tool holder	-	15.419.XXX
40 holders ISO-SK 40	В	18.364.XXX
25 holders ISO-SK 50	F	18.365.XXX
30 holders HSK 63 A+C+E/80 B+D+F	E	18.368.XXX













Specification

- 1 insert frame with pair of frame supports,
- 2 tool cradle with pair of frame supports, angled 15°, 2 adjustable shelves including
- PVC ribbed mat

wheel diameter Ø 200 mm, rubber castors, load capacity 800 kg

Holder type	Partitioning schemes	Art. no. 🞇
without tool holder	-	15.420.XXX
48 holders ISO-SK 40	В	18.369.XXX
30 holders ISO-SK 50	F	18.370.XXX
36 holders HSK 63 A+C+E/80 B+D+F	E	18.373.XXX

NC bench stand






With screwed in insert frame for 3 strips.

Specification: steel sheet. Colour: grey, NCS S 4502-B. Side elements: as per colour chart

Holder type	Partitioning schemes	Art. no.
without tool holder	-	12.959.XXX
24 holders ISO-SK 40	В	15.431.XXX
15 holders ISO-SK 50	F	15.432.XXX
18 holders HSK 63 A+C+F/80 B+D+F	E	18.353.XXX









WELL ORGANISED

Thanks to the wide range of combination options, each workstation can be individually equipped with LISTA workbenches to optimise space. The combinable workbench tops, drawer cabinets, power unit cabinets, vices and rear panels can be organised to create optimum working conditions. The latest findings in ergonomics are incorporated and everything is delivered to the highest LISTA quality even for the most demanding working environments in workshops and heavy industry.





The right solution for every need



move workstations

see p. 110



Workbenches

see p. 116



Hexagonal workbenches

see p. 148



Compact workbenches

see n 150



System workbenches

see p. 152



Assembly trolley

see p. 156



Test and inspection workstations

see p. 158



Storage containers and keyhole hooks

see p. 162



Desk chairs

see p. 164



The utmost stability

Workbench load capacity up to 3 t, workbench tops extremely robust and resistant



Great design diversity

thanks to the wide range of components, substructures, materials and surfaces



Ergonomics and health

with height-adjustable workbench legs for optimum working heights and leg room – also available for our modular superstructure system



Easily adaptable to new working environments

Flexible integration and reconfiguration of all components in the modular system



Fully mobile

when fitted with rubber or nylon castors for mobile use



move workstation system

electrically height-adjustable workstations with load capacities of 300–400 kg for a wide range of requirements and applications, see p. 110–115



Fast and easy assembly

thanks to countertops with pre-assembly (incl. threaded inserts and bolts) for fastening all substructures and drawer cabinets



General benefits of the LISTA drawer cabinets

See p.38/39

Workstation system and workbenches

Three into one

Whether heavy duty or the assembly area - with the LISTA work-station system you can configure the solution that suits all your tasks and requirements. This works according to a very simple principle. Each workstation is comprised of three main elements: substructure, universal superstructures and worktops. These can be individually equipped and expanded to provide total flexibility.





Substructures

Depending on the application and area of application, you can choose between substructures in four variants.

From p. 112



Move workstation frame in H design, electrically adjustable



Move workstation foot in H design, electrically adjustable



Move workstation frame in C design, height-adjustable



Workbench leg assembly, fixed or height-adjustable







3

Universal superstructures

Combine substructures and worktops freely and flexibly with the universal superstructures of the LISTA system. Numerous modules and accessories are available from the rear panel to the monitor holder.

See p. 132




2

Worktops

The LISTA workstation system offers you a wide range of high-quality worktops:

- Eight standard materials for every purpose
- Six standard widths and five standard depths Other plate types and dimensions on request.

See p. 124



LISTA's workstation system range offers an all-in-one solution for optimising workstations and workflows. Regardless of whether it's an individual table, multiple workstations or a team environment: the seamless integration of components turns simple workstations into functional system solutions for optimum ergonomics and cost-effectiveness.



up to 300 kg (move C design) or 400 kg (move H design) weight loading, H design is characterised by maximum rigidity

User-friendly and ergonomic

freely variable electrical height adjustment with workstation frames (H or C design) or workstation feet (H design). Programmable control for storing table heights

- Space-saving and well-organised storage

in freely combinable and configurable LISTA drawer cabinets

Perfect cable management

thanks to cable trays and cable guide clip

Fully mobile

when fitted with rubber or nylon castors for mobile use

Universal superstructures

see p. 132

>>> Desk chairs

see p. 164-167


General benefits of the LISTA drawer cabinets

see p. 38/39




Desk chairs see p. 164-167

■ Benefits of ergonomic workstation design

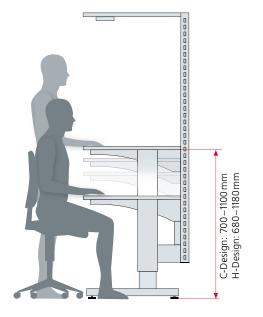






- 20% increased efficiency
- Increased performance potential and reduced processing times
- Healthier work environment and cost reduction in the long term thanks to fewer disruptions

Optimum reach area

Based on average human body dimensions, there are four access zones on the table worktop with different priorities:



Optimum arrangement of grab containers in zone 2 and 3 right beside the workpiece

1 The working centre:

Both hands work in the direct field of vision

2 Extended working centre:

Both hands reach all areas of this zone

Parts and tools are within easy reach of one hand


4 Extended one-hand zone:

Outermost usable zone

Lighting

3 One-hand zone:

Good lighting helps to reduce error rates caused by overstrained eyes. Employee performance and production quality rise. The required light intensity must be adapted to the assembly activities.



Mobility - humans as a standard

Assembly workstations should be fundamentally designed for sitting as well as standing positions. If alternating between sitting and standing positions is not possible, a sitting position is preferable.

Features	move H design		move C design
	H frame H leg		C frame
	一	1 1	$\overline{\square}$
			I
Load capacity	400 kg	400 kg	300 kg
Adjustment range (without top)	680 — 1180 mm	680 – 1180 mm	700 – 1100 mm
Workbench depth	800 / 1000 mm	750 – 1000 mm	620-800 mm
Rigidity in the front countertop area	++	++	+
Knee clearance	+	+	++
Countertop thickness	30 mm	40 / 50 mm	30 mm
Countertop widths	1000/1500/2000	flexible up to 2500*	1200/1500/2000

^{*}The max. top width depends on the load capacity. For load capacities see p. 130/131.

Substructures

Does your workstation require a particularly stable and robust substructure, and must it be accessible or easily height-adjustable? The LISTA workstation system has flexible and configurable modules in four variants tailored to the requirements of different areas of application. In addition to the two electrically adjustable LISTA move H design workstation frames and legs, our system also includes the C design of the movable workstation frame, which is especially suitable for assembly and control tasks, as well as the classic workbench leg assembly for high loads in workshops and production.

move workstation frame, H design, electrically height-adjustable



4-legged tubular construction incl. connection for universal superstructures and adjustable legs. Lifting force: Max. 400 kg with evenly distributed load. Lift: 500 mm. Max. speed 23 mm/s. Incl. control and operating unit. Input via system plug. Colour: Lifting unit RAL 9006 white aluminium, outer profile according to colour chart. Without connecting cable. Country-specific connection cable must be ordered separately. See p. 144. Countertop must be ordered with pre-assembly, see page 125. Incl. integrated guide rail for mounting the optional support pillars,

950 985 680–1180 1000×1000 30 8	8.226.XXX
1450 785 680-1180 1500×800 30 8	8.227.XXX
	8.228.XXX
1450 985 680-1180 1500×1000 30 8	8.229.XXX
1950 785 680-1180 2000×800 30 8	8.230.XXX
1950 985 680-1180 2000×1000 30 8	8.231.XXX

Height without countertop

Reinforcement angle for move workstation frame, H design

For mounting on the workbench top and reinforcing the guide rails to withstand high loads.. D×H: 190×272 mm Colour: as per colour chart.



Fastening bracket

Art. no. 🞇

88.237.XXX

Suspension adapter for hanging drawer cabinets

Can be mounted either on the left or right underneath the countertop. Model: sheet steel. Colour: as per colour chart.

for frame depth mm	width drawer cabinet	depth drawer cabinet	Art.no. 🞇
785	18 E	27 E / 36 E	88.238.XXX
785	27 E	27 E / 36 E	88.239.XXX
985	18 E	27 E / 36 E	88.240.XXX
985	27 E	27 E / 36 E	88.241.XXX



Keyboard drawer

Pull-out shelf with rear stop. For H design (frame and leg). W \times D: 550 \times 370 mm. Max. load: 20 kg. Model: sheet steel. Colour: as per colour chart.

> Art. no. 🎇 88.242.XXX

Factory assembly

For workstation frame move, H design, with countertop. Without superstructures and base cabinets.

Art. no.

Electrically height-adjustable workstation frame installation


88.246.000

Pull-out keyboard for substructure 550/370



move workstation leg, H design, electrically height-adjustable





W->	D 7	H	for top depth mm	Top thickness mm	Art. no. 🞇
90*	725	680-1180**	750/800	40-50	88.200.XXX
90*	925	680-1180**	1000	40-50	88.201.XXX

^{*}Corresponds to leg width (max. width 175 mm) **Height without countertop



Control unit two-fold/4K

Complete set incl. basic control elements (up/down control), cable guide chain and connection cable between control unit and motors. For controlling the move workstation leg, H design. Mains voltage 100 - 240 V AC, 50 - 60Hz, IP20, overload protection, soft start/stop function, connection via Wieland system plug, colour: black

Art. no.

88.203.000 Convenient operating element

Convenient operating element

be saved. Manual height storage.

Display of table height. Four favourite positions can

Control unit set 2-fold/4K

Art. no.

88.202.000



Cross brace for shelves

Including fastening material. Model: sheet steel. Colour: as per colour chart. Scope of delivery: 1 unit

for top width (2 legs) mm	for leg distance (centre) mm	Strut length mm	Art. no. 👭
1500	1300	1224	43.233.XXX
2000	1800	1724	43.236.XXX
2500	2300	2224	40.242.XXX



Workstation anti-tilting device

For increasing the tilt protection or securing the workstation. Suitable for H frame and H leg.



Leg extension incl. castors

For the mobile version of a move workstation in H design, load capacity 300 kg. Suitable for H frame and H leg.

Wide days by a contraction	for top depth mm 750/800	Art. no. ** 88.312. XXX 88.313. XXX
H design leg extension 2 profiles	1000	
Floor anchoring, galvanised (2 pcs.)		88.314.000
Leg extension incl. push handle and castors* 2 leg extensions	750/800	88.310.XXX
4 double castors (Ø 80 mm, steerable with 2 brakes)	1000	88.311.XXX

^{*} Increases table height by approx.



Multiplex/synthetic resin storage shelf

Suitable for attachment between two move workbench legs, H design. Capacity 20 kg. Including fastening material.

Multiplex 20 mm

for top width mm	W→	D 7	Η <mark>↑</mark>	for depth work- bench leg move mm	Art. no.
1500	1420	520	20	725	88.213.000
2000	1920	520	20	725	88.214.000
1500	1420	720	20	925	88.216.000
2000	1920	720	20	925	88.217.000
Special size (max	x. W×D: 250	0×1250 mm)		88.218.000

Resin 22 mm

for top width mm	W->	D	Η <mark>↑</mark>	for depth work- bench leg move mm	Art. no.
1500	1420	520	22	725	88.220.000
2000	1920	520	22	725	88.221.000
1500	1420	720	22	925	88.223.000
2000	1920	720	22	925	88.224.000
Special size (max	x. W×D: 274	0×1200 mn	n)		88.225.000

move workstation frame, C design



The LISTA move workstation frame in C design is an especially accessible and flexibly expandable workstation, especially for assembly, testing and control areas. It can be height-adjusted with clamping screws, a hand crank or electric motor. The legs are equipped with levelling screws. A steel frame joins the legs and supports the table top (suitable for table top depths of 620 – 800 mm). Max. 300 kg capacity with evenly distributed load. Model: Steel construction, painted. Colour: lifting unit: Aluminium anodised colourless; outer profile, frame and legs: as per colour chart. Without connection cable. Country-specific connection cable must be ordered separately, see page 144. Countertop must be ordered with pre-assembly, see page 125.



With clamping screws

Table legs height-adjustable using clamping screws. For top thickness:

W <mark>→</mark>	D 7	Η <u></u>	for top depth mm	for top width mm	Art. no. 🞇
1030	600	700-1100	620-800	1200	65.300.XXX
1360	600	700-1100	620-800	1500	65.301.XXX
1780	600	700-1100	620-800	2000	65.302.XXX

Height without countertop



With electric motor

Table substructure can be electrically adjusted to any height. The operating unit can be mounted on the left or right (on the right as standard). A connection cable is required for operation, see p. 144. For top thickness: 30 mm.

W->	D 7	H	for top depth mm	for top width mm	Art. no. 🐫
1030	600	700-1100	620-800	1200	65.204.XXX
1360	600	700-1100	620-800	1500	65.205.XXX
1780	600	700-1100	620-800	2000	65.206.XXX

Height without countertop

Programmable control system

Optionally available for automatic adjustment of individual installation heights



Art. no.

Programmable control system

65.232.000

The maximum load for the H design as well as for the C design applies with an evenly distributed load (incl. countertop and add-on elements).



With hand crank

Table substructure can be mechanically adjusted to any height with the hand crank. The hand crank is removable (can be mounted on the left or right). For top thick-

W->	D 7	H	for top depth mm	for top width mm	Art. no. ╬
1030	600	700-1100	620-800	1200	65.303.XXX
1360	600	700-1100	620-800	1500	65.304.XXX
1780	600	700-1100	620-800	2000	65.305.XXX

Height without countertop



(castors up)



Mobile Table (castors down)

Caster set C design

For fastening to existing move workstation frame, C design. Designed as temporary roll support to move the workstation quickly and effortlessly. Adjustment range downwards reduced by approx. 25 mm. Incl. push

	Art. no.
Caster set	74.991.000

Accessories







Art. no. 🞇

65.297.XXX

Pull-out keyboard drawer for table frame

Load: 20 kg Drawer width: 520 mm. 560

PC compartment

Mounting on bench frame. Do not exceed max. PC height: 500 mm. 410

65.144.XXX


Bracket


Bracket 18 × 27 E for fastening the drawer cabinets to either the left or the right of the table frame. Specification: sheet steel. Colour: as per colour chart. Drawer cabinets 18×27 E, see p. 46 onwards.

65.074.XXX




move workstation planning information

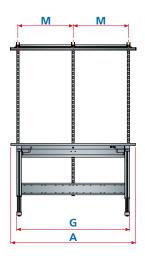


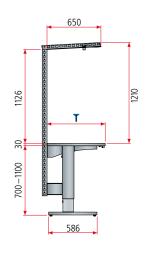

Workstation frame, C design						
Worktop width mm	Α	1200	1500	2000		
Worktop depth mm	Т	700	700	700		
Table frame width mm*	G	1030	1360	1780		
Possible module widths mm	M	s. p. 136	s. p. 136	s. p. 136		
Max. superstructure module widths mm	M	1000	1330	1665		


^{*} Dimension G = Exterior side of support to exterior side of support

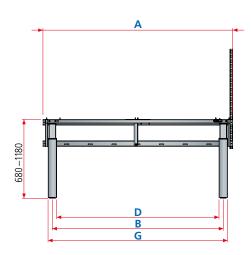




Workstation frame, H design									
Worktop width mm A 1000 1500 2000									
Т	800/1000	800/1000	800/1000						
G	950	1450	1950						
	2	2	2						
В	800	1300	1800						
	920	1420	1910						
D	710	1210	1710						
	720	1220	1720						
	A T G	A 1000 T 800/1000 G 950 2 B 800 920 D 710	A 1000 1500 T 800/1000 800/1000 G 950 1450 2 2 B 800 1300 920 1420 D 710 1210						

 $^{^{\}star}$ when using a top depth of 800 mm





Workstation frame, H design								
Worktop width mm	Α	1000	1500	2000	2500	3000		
Worktop depth mm	Т	800/1000	800/1000	800/1000	800/1000	800/1000		
Number of leg assemblies		2	2	2	2	3		
Width between supports mm	В		1300	1800	2300	1400		
Storage shelf			1420	1920	2420	2×1460		
Clear width mm	D		1210	1710	2210	1310		
Clear crossbeam width mm			1220	1720	2220	1320		

 $[\]ensuremath{^{\star}}$ when 800 mm top depth is used

^{**}without guide rail

Thanks to the wide range of combination options, each workstation can be individually equipped with LISTA workbenches to optimise space. The combinable workbench tops, drawers and equipment cabinets, vices and rear panels can be organised to create optimum working conditions. The latest findings in ergonomics are incorporated and everything is delivered to the highest LISTA quality even for the most demanding working environments in workshops and heavy industry.



see p. 132

see p. 38/39

Desk chairs see p. 164-167

Benefits of LISTA drawer cabinets

116



Various substructures



Workbench legs

- sturdy steel plate construction
- welded from steel profiles
- with holes for attaching worktops and shelves



Castors for mobility

- for mobile workbenches
- fixed castors and swivel castors including brake mechanisms
- nylon or rubber-coated wheels for soft and hard floors




Vice cabinet

- can be fitted with any desired vice
- can easily be folded away beneath the workbench



Power unit and drawer cabinets


 prepared for the installation of the power and air supply by the customer at the workstation



Order preconfigured models



... or configure and order workbenches individually

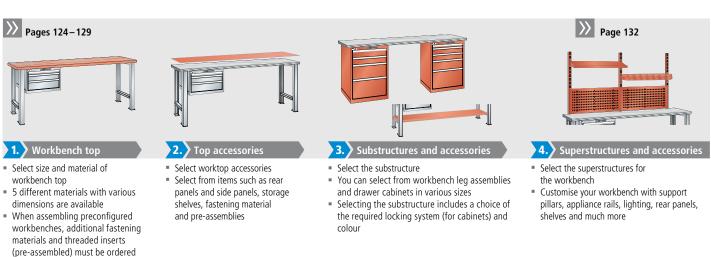

for each component.



Art. no. 78.875.514 Frame: Light grey, RAL 7035. Fronts: Light blue, RAL 5012 (excluding optional beech instead of Multiplex worktop)

D 7 700 mm

Workbenches fitted with drawer cabinets in sizes* 27 x 27 E

18 × 27 E 27 × 27 E 36 × 27 E









W→	D 7	H T		kg	Number of drawers (mm)		Art. no. 🞇
1500	700	840	Multiplex	600	-	-	78.389.XXX
1500	700	890	Multiplex	600	-	-	78.395.XXX
2000	700	840	Multiplex	360	-	-	78.394.XXX
2000	700	890	Multiplex	360	-	-	78.396.XXX
1500	700	840	Multiplex	600	3 : 1×50 / 1×100 / 1×150	KEY Lock	78.397.XXX
1500	700	890	Multiplex	600	3 : 1×50 / 1×100 / 1×150	KEY Lock	78.875.XXX
2000	700	840	Multiplex	360	3 : 1×50 / 1×100 / 1×150	KEY Lock	78.398.XXX
2000	700	890	Multiplex	360	3 : 1×50 / 1×100 / 1×150	KEY Lock	78.876.XXX
1500	700	840	Multiplex	1500	4 : 2×100 / 1×200 / 1×300	KEY Lock	78.879.XXX
2000	700	840	Multiplex	800	4 : 2×100 / 1×200 / 1×300	KEY Lock	78.885.XXX
1500	700	840	Multiplex	1500	5 : 1×50 / 2×100 / 1×150 / 1×300	KEY Lock	78.888.XXX
2000	700	840	Multiplex	800	5 : 1×50 / 2×100 / 1×150 / 1×300	KEY Lock	78.889.XXX
1500	700	890	Multiplex	1500	5 : 2×100 / 1×150 / 2×200	KEY Lock	78.892.XXX
2000	700	890	Multiplex	800	5 : 2×100 / 1×150 / 2×200	KEY Lock	78.893.XXX
1500	700	890	Multiplex	1500	6 : 1×50 / 2×100 / 2×150 / 1×200	KEY Lock	78.896.XXX
2000	700	890	Multiplex	800	6 : 1×50 / 2×100 / 2×150 / 1×200	KEY Lock	78.897.XXX

* These workbench examples are fitted with size 27×27 E drawer cabinets. Each workbench is also available with drawer cabinets

 $18 \times 27 E = 306 \times 459 mm (W \times D)$ $36 \times 27 E = 612 \times 459 mm (W \times D)$

Workbenches

With Multiplex top, including preassembly and fastening material. Drawer cabinet can be fitted on either the right or the left.

40 mm


Multiplex top thickness Workbench

leg height 800/850 mm Drawer cabinet width 564 mm Drawer cabinet depth 572 mm Drawer load capacity 75 kg For load specifications see p. 130/131

Universal superstructures

Whether workstation system, workbench, compact workbench, team or testing and inspection workstations – the compatible, modular superstructure system is unique due to its flexibility and the variety of ways it can be put together.



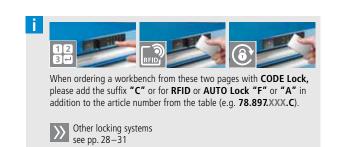





D 750/800 mm

459×612 mm

W→ D7 H↑

Workbenches fitted with drawer cabinets in sizes* 27×36 E

Number of drawers (mm)

Art. no. 🐫

78.268.XXX










When ordering a workbench from these two pages with CODE Lock, please add the suffix "C" or for RFID or AUTO Lock "F" or "A" in addition to the article number from the table (e.g. 78.897.XXX.C).





						_		
1500	750	840	Multiplex	600	-	-	40.961.XXX	S
1500	750	890	Multiplex	600	-	-	78.900.XXX	
1500	750	740-1090**		600			78.265.XXX	
1500	800	850	Beech	800	-	-	88.141.XXX	S
1500	800	900	Beech	800	-	-	78.902.XXX	
1500	800	750-1100**		800	-	-	78.266.XXX	
2000	750	840	Multiplex	360	-	-	40.963.XXX	S
2000	750	890	Multiplex	360	-	-	78.901.XXX	
2000	750	740-1090**		360	-	-	78.267.XXX	
2000	800	850	Beech	500	-	-	88.143.XXX	S
2000	800	900	Beech	500	-	-	78.903.XXX	



1500	750	840	Multiplex	600	1 : 1 × 150	KEY Lock	40.934.XXX
1500	750	890	Multiplex	600	1 : 1 × 150	KEY Lock	78.904.XXX
1500	800	850	Beech	800	1 : 1 × 150	KEY Lock	59.189.XXX
1500	800	900	Beech	800	1 : 1 × 150	KEY Lock	78.906.XXX
2000	750	840	Multiplex	360	1 : 1 × 150	KEY Lock	40.936.XXX
2000	750	890	Multiplex	360	1 : 1 × 150	KEY Lock	78.905.XXX
2000	800	850	Beech	500	1 : 1 × 150	KEY Lock	59.191.XXX
2000	800	900	Beech	500	1 : 1 × 150	KEY Lock	78.907.XXX

2000	800	900	веесп	500	1: 1 × 150	KEY LOCK	78.907.XXX	
1500	750	840	Multiplex	600	3 : 1 × 50 / 1 × 100 / 1 × 150	KEY Lock	59.005.XXX	S
1500	750	890	Multiplex	600	3 : 1 × 50 / 1 × 100 / 1 × 150	KEY Lock	78.908.XXX	
1500	750	740-1090**		600	3 : 1×50 / 1×100 / 1×150	KEY Lock	78.269.XXX	
1500	800	850	Beech	800	3 : 1×50 / 1×100 / 1×150	KEY Lock	59.213.XXX	S
1500	800	900	Beech	800	3 : 1 × 50 / 1 × 100 / 1 × 150	KEY Lock	78.912.XXX	
1500	800	750-1100**		800	3 : 1 × 50 / 1 × 100 / 1 × 150	KEY Lock	78.270.XXX	
2000	750	840	Multiplex	360	3 : 1 × 50 / 1 × 100 / 1 × 150	KEY Lock	59.007.XXX	S
2000	750	890	Multiplex	360	3 : 1 × 50 / 1 × 100 / 1 × 150	KEY Lock	78.910.XXX	
2000	750	740-1090**		360	3 : 1 × 50 / 1 × 100 / 1 × 150	KEY Lock	78.271.XXX	
2000	800	850	Beech	500	3 : 1 × 50 / 1 × 100 / 1 × 150	KEY Lock	59.215.XXX	S
2000	800	900	Beech	500	3 : 1 × 50 / 1 × 100 / 1 × 150	KEY Lock	78.914.XXX	

500 **3**: 1×50 / 1×100 / 1×150 KEY Lock **78.272.XXX**



Multiplex top

Thickness 40 mm. Made of steamed beech veneers glued in multiple layers, waterproof, with bevelled edges and sanded, oiled and waxed surface.

The top is splash-proof, dirt-repellent and largely impervious to oil and grease.



Beechwood top

Thickness 50 mm. Made of glued steamed beech beams, waterproof, with bevelled edges and a sanded, oiled and waxed surface. The top is splash-proof, dirt-repellent and largely impervious to oil and grease.



2000

800

750-1100**



D 77 750/800 mm

459×612 mm

W→ D7 H↑


Workbenches fitted with drawer cabinets in sizes* 27×36 E

18 × 27 E 27 × 27 E 36 × 27 E

18×36 E 27×36 E 36×36 E

Art. no. 🞇

* These workbench ordering examples




 $27 \times 27 E = 459 \times 459 mm (W \times D)$ $36 \times 27 \text{ E} = 612 \times 459 \text{ mm (W} \times \text{D)}$ $18 \times 36 E = 306 \times 612 mm (W \times D)$ $36 \times 36 E = 612 \times 612 mm (W \times D)$



1500	/50	840	Multiplex	600	4 : 1 × 50 / 2 × 100 / 1 × 200	KEY LOCK	59.019.XXX
1500	750	890	Multiplex	600	4 : 1 × 50 / 2 × 100 / 1 × 200	KEY Lock	78.916.XXX
1500	800	850	Beech	800	4 : 1 × 50 / 2 × 100 / 1 × 200	KEY Lock	59.008.XXX
1500	800	900	Beech	800	4 : 1 × 50 / 2 × 100 / 1 × 200	KEY Lock	78.920.XXX
2000	750	840	Multiplex	360	4 : 1 × 50 / 2 × 100 / 1 × 200	KEY Lock	59.040.XXX
2000	750	890	Multiplex	360	4 : 1 × 50 / 2 × 100 / 1 × 200	KEY Lock	78.918.XXX
2000	800	850	Beech	500	4 : 1 × 50 / 2 × 100 / 1 × 200	KEY Lock	59.013.XXX
2000	800	900	Beech	500	4 : 1 × 50 / 2 × 100 / 1 × 200	KEY Lock	78.922.XXX

Number of drawers (mm)



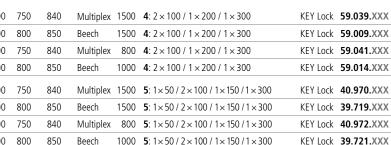



411	13
	15
	20
	20
	20

2000	750	
2000	800	
2000	750	
2000	800	

900

1000

200

	1500	750	840	Multiplex	1500	4 : 2 × 100 / 1 × 200 / 1 × 300	KEY Lock	59.039.XXX
	1500	800	850	Beech	1500	4 : 2 × 100 / 1 × 200 / 1 × 300	KEY Lock	59.009.XXX
,	2000	750	840	Multiplex	800	4 : 2×100 / 1×200 / 1×300	KEY Lock	59.041.XXX
	2000	800	850	Beech	1000	4 : 2×100 / 1×200 / 1×300	KEY Lock	59.014.XXX
	1500	750	840	Multiplex	1500	5 : 1×50 / 2×100 / 1×150 / 1×300	KEY Lock	40.970.XXX
	1500	800	850	Beech	1500	5 : 1×50 / 2×100 / 1×150 / 1×300	KEY Lock	39.719.XXX
	2000	750	840	Multiplex	800	5 : 1×50 / 2×100 / 1×150 / 1×300	KEY Lock	40.972.XXX
	2000	800	850	Beech	1000	5 : 1×50 / 2×100 / 1×150 / 1×300	KEY Lock	39.721.XXX
	1500	750	890	Multiplex	1500	5 : 2 × 100 / 1 × 150 / 2 × 200	KEY Lock	78.924.XXX
	1500	800	900	Beech	1500	5 : 2 × 100 / 1 × 150 / 2 × 200	KEY Lock	78.928.XXX
	2000	750	890	Multiplex	800	5 : 2 × 100 / 1 × 150 / 2 × 200	KEY Lock	78.926.XXX
	2000	800	900	Beech	1000	5 : 2 × 100 / 1 × 150 / 2 × 200	KEY Lock	78.930.XXX
	1500	750	890	Multiplex	1500	6 : 1 × 50 / 2 × 100 / 2 × 150 / 1 × 200	KEY Lock	78.932.XXX
	1500	800	900	Beech	1500	6 : 1 × 50 / 2 × 100 / 2 × 150 / 1 × 200	KEY Lock	78.936.XXX
	2000	750	890	Multiplex	800	6 : 1 × 50 / 2 × 100 / 2 × 150 / 1 × 200	KEY Lock	78.934.XXX
	2000	800	900	Beech	1000	6 : 1×50 / 2×100 / 2×150 / 1×200	KEY Lock	78.938.XXX
	2000	750	840	Multiplex	1500	4 left: 2×100/1×200/1×300 5 right: 1×50/2×100/1×150/1×	KEY Lock	59.051.XXX
	2000	800	850	Beech	1500	300	KEY Lock	59.018.XXX
	2000	750	890	Multiplex	800	5 left: 2 × 100 / 1 × 150 / 2 × 200	KEY Lock	78.940.XXX

Workbenches

S

S

S

S

S

KEY Lock **78.942.XXX**

With Multiplex or beech top including pre-assembly and fastening material. Drawer cabinet can be fitted on either the right or the left.

Multiplex top thickness 40 mm Beech top thickness 50 mm Workbench

800/850 mm leg height ${\sf height-adjustable**}$ 700-1050 mm Drawer cabinet width 564 mm Drawer cabinet depth 725 mm Drawer load capacity 75 kg

For load specifications see p. 130/131

S LISTA fast delivery program

These LISTA products in light blue (.010) and light grey (.020) are available ex-works.



Light blue RAL 5012

Light grey **RAL 7035**

120 www.lista.com

6 right: $1 \times 50/2 \times 100/2 \times 150/1 \times$





Art. no. **69.853.200**Top-mounted cabinet with aluminium roller shutters anthracite, RAL 7016






Housing

- Sturdy steel structure
- Version without shelf as top-mounted cabinet (direct mounting on countertop) or alternatively with shelf as overhead cabinet, see p. 186/187




Handle

- Integrated handle
- Locking mechanism has no impact on usable depth
- Locking with KEY lock, keyed alike possible on request.



Power conduit

- Optionally integrated power conduit
- Configurable with power modules (see page 145)



Adjustable shelf

- Optional adjustable shelf
- Adjustment increment: 25 mm



Roller shutter cabinet top-mounted cabinet

Aluminium roller shutters with spring-loaded winding ensures a large usable depth (215 mm) and safe operation (self-locking). The sturdy steel housing and the aluminium roller shutters ensure stable, secure storage. Punch-outs intended for power supply. Mounted directly on countertop.

Perforated rear panel for using perforated wall hooks (see p. 163), with square perforation 10×10 and $38 \, \text{mm}$ divisions.

Further versions with a height of 800 mm (with shelf) are attached to the support pillar via perforated rear panel (see p. 186/187).


W >	D 7	Η↑	Model	Art. no. 🞇
1500	250	1050	without shelf	69.852.XXX
2000	250	1050	without shelf	69.853.XXX



Adjustable shelf

Optional adjustable shelf Depth 175 mm

W->	D 7	kg	Art. no. 🞇
1500	175	20	69.854.XXX
2000	175	20	69.855.XXX



Power conduit set

Integrated cable conduit solution. Designed for installation in roller shutter cabinet. The power conduit can be equipped with the power modules.

See	08	ige	145

for width	for power module	
mm	mm	Art. no. 🞇
1500	6×	89.022.XXX
2000	8×	89.023.XXX



Workbench legs, stationary, fixed height and height-adjustable

The LISTA workbench leg assembly is a rugged steel construction, welded together with extruded profiles, with holes for fastening the top. The feet can be anchored to the floor through a hole in the base plate. Load capacity 400 kg. Please note the maximum clear width on page 130. Specification: sheet steel. Colour: as per colour chart.

Height mm	For top depth mm	Top thickness mm	Width mm	Depth mm	Art. no. 🛚 🐫
800	700	40-50	80	675	43.101.XXX
850	700	40-50	80	675	43.176.XXX
700-1050*	700	40-50	80	675	43.186.XXX
800	750, 800	40-50	80	725	43.111.XXX
850	750, 800	40-50	80	725	43.179.XXX
700-1050*	750, 800	40-50	80	725	43.231.XXX


^{*} Height-adjustable in 25 mm increments.



Levelling plates

For height compensation. For precise alignment, even on uneven floors. Description: PVC. Colour: grey. Dimensions: $90 \times 90 \text{ mm (W} \times D)$

Thickness mm	Art. no.
1	338.146.000
2	338.147.000
4	304.309.000



Levelling foot

1 × levelling foot, ø 50 mm, adjustment range 45–90 mm. Including fastening material. Two levelling feet are required per workbench leg assembly.

Description: plastic, black.

Art. no. **345.040.000**



Workbench leg assemblies, mobile and height-adjustable

Option to select nylon or rubber coated wheels, depending on the properties of the floor. Width: 80 mm. Depth: 725 mm. Height: 700 – 1050 mm. Please note the maximum clear width on page 130. Specification: sheet steel. Colour: as per colour chart.

Specification	kg	Wheel Ø mm	Art. no. 🛚 🐫
with push handle , without castors	400	-	39.974.XXX
with 2 nylon fixed castors	200	100	39.770.XXX
with 2 rubber fixed castors	200	100	39.965.XXX
with 2 nylon swivel castors, brakes	200	100	39.771.XXX
with 2 rubber swivel castors, brakes	200	100	39.966.XXX
with 2 nylon swivel castors, brakes, push handle	200	100	39.973.XXX
with 2 rubber swivel castors, brakes, push handle	200	100	39.972.XXX



Cross brace

For stabilising the legs on a workbench (e.g. those on a mobile workbench). Including fastening material. Model: sheet steel. Colour: as per colour chart. Scope of delivery: 1 unit

for top width (2 legs) mm	for leg distance (centre) mm	Strut length mm	Art. no. 🞇
1500	1300	1224	43.233.XXX
2000	1800	1724	43.236.XXX
2500	2300	2224	40.900.XXX



Cross brace for in-line installation

For connecting two workbenches (top with three work legs, 2-part strut). Including fastening material. Model: sheet steel. Colour: as per colour chart.

for top width (3 legs) mm	for leg distance (centre) mm	Strut length mm	Art. no. 🞇
2000	900	1648 (2×824)	40.833.XXX
2500	1150	2148 (2×1074)	43.241.XXX
3000	1400	2648 (2×1324)	43.242.XXX




Drawer cabinets

Every workbench is available with drawer cabinets in sizes:

 $\begin{array}{ll} 18 \times 27 \; E = 306 \times 459 \; mm \; (W \times D) & 18 \times 36 \; E = 306 \times 612 \; mm \; (W \times D) \\ 27 \times 27 \; E = 459 \times 459 \; mm \; (W \times D) & 27 \times 36 \; E = 459 \times 612 \; mm \; (W \times D) \\ 36 \times 27 \; E = 612 \times 459 \; mm \; (W \times D) & 36 \times 36 \; E = 612 \times 612 \; mm \; (W \times D) \end{array}$

18×27 E 27×27 E 36×27 E 18×36 E 27×36 E 36×36 E





Mobile workbenches

must be fitted with a push handle according to the Product Safety Act. In addition, mobile workbenches must be fitted with a strut for stability.



Storage shelves between workbench leg assemblies, 675 and 725 mm deep


Thickness 20 mm, maximum load capacity 20 kg. Specification: Multiplex top, pre-drilled, including fastening material.

Depth of storage shelve	s mm	560	610
For depth of workbench leg assemblie	s (mm)	675	725
Worktop width mm	Width mm	Art. no.	Art. no.
1500	1420	43.405.000	43.247.000
2000	1920	43.406.000	43.248.000
2500	2420	43.407.000	43.258.000
3000	2920*	43.408.000	43.259.000

Storage shelves between workbench leg assembly and cabinet, 675 and 725 mm deep

Thickness 20 mm, maximum load capacity 20 kg. Specification: Multiplex top, pre-drilled, including fastening material, without support bracket.


elves mm	560	610
blies (mm)	675	725
STA Unit	572/27 E	725/36 E
Width storage shelves mm	Art. no.	Art. no.
835	43.409.000	43.266.000
1335	43.410.000	43.267.000
1835	43.411.000	43.271.000
2335	43.431.000	43.272.000
	Width storage shelves mm 835 1335 1835	blies (mm) 675 TA Unit 572/27 E Width storage shelves mm Art. no. 835 43.409.000 1335 43.410.000 1835 43.411.000



Support bracket for storage shelf on drawer cabinet

Fastening material included. Specification: sheet steel. Colour: light grey, RAL 7035.

For storage shelf depth mm	Workbench depth mm	Art. no.
560	461	43.432.000
610	540	43.273.000



CPU holder

CPU holder attached hanging to the workbench top (minimum top thickness 30 mm). Side holder adjustable for equipment widths of about 100 to 220 mm. Including fastening material. Description: sheet steel. Colour: according to colour chart.

Width mm	Depth mm	Hight mm	Art. no.
250	460	510	340.243.XXX



CPU holder pre-assembly

Pre-assembly (pre-drilled holes) excluding fastening material.

Pre-assembly position	Art. no.
left	88.000.000
right	88.001.000



^{*} Slotted (two-piece, 2 × 1460 mm), 3 workbench leg assemblies required.

The LISTA workstation system offers the right worktop for every application area, from the universal worktop with linoleum covering to the chrome steel worktop. Another plus point: If the support pillars for the superstructures are fastened behind the worktop, you can make effective use of the full worktop depth with the LISTA system.




Multiplex top

- Made of steamed beech veneers, glued waterproof and with bevelled edges
- Sanded, oiled and waxed surface
- Versatile, splash-proof, dirt-repellent and largely impervious to oil and grease




Beechwood top

- Made of steamed beech beams, glued waterproof and with bevelled edges
- Sanded, oiled and waxed surface
- Extremely resilient, splash-proof, dirt-repellent and largely impervious to oil and grease



Universal top

- Universal countertop for the workshop
- Linoleum covering, grey marbled, 2 mm, with ABS edges, light grey
- Impact-resistant and slightly dampening
- Limited scratch resistance
- Colour change due to darkness is a natural reaction (disappears in normal light conditions)
- Linoleum is made from natural raw materials



Eterlux top

- For hygienic applications
- HPL coating, 3 mm, with ABS edges 2mm light grey
- Easy-to-clean surface texture
- Highest scratch resistance
- Heat-resistant up to 180°C, briefly up to 280°C
- Resistant to chemicals and solvents, also acids and alkalis to a certain extent
- Limited impact resistance




Nitrile top

- Technical coating of natural rubber
- 4 mm rubber floor covering, with 2 mm black ABS edges
- Medium-hard, slip-resistant and shock-absorbing as well as oil and fuel-resistant
- Can be used at -10°C to +70°C
- Slight clouding or scratches are production-related and correspond to the normal surface condition of the product



Metal coverings (on request)

- For high usage
- Very easy to clean and versatile
- Choice of sendzimir galvanised coating and chrome steel coating




Resin top

- Colour light grey
- Easy-to-clean textured surface with HPL coating, 0.8 mm
- Resistant to common household chemicals, solvents, weak acids and alkalis
- High impact and scratch resistance
- Also available as an ESD model
- With ABS edges, 2 mm, grey



ABS plate

- With hard, slightly grained surface texture, 2 mm
- With ABS edges, 2 mm, black
- High scratch resistance and impact resistance
- Resistant to chemicals, oils and greases




PVC mat, 4 mm, transparent

- Dampening and slip-resistant
- Smooth, soft surface, easy to clean and impact-resistant
- Resistant to chemicals, solvents, weak acids and alkalis with brief exposure
- Do not use in combination with a beech top
- Made to measure (observe general cutting tolerances)
- PVC mat not suitable for beech wood top

Art. no.

Size max. 4000 × 1500

39.574.000



Chrome steel and urphen plates

- Chrome steel plate sealed all round, ideal for pharmaceuticals and laboratories
 - Available on request





Threaded inserts, pre-assembled

• For easy attachment of countertops to frame or leg

Pre-assembly version	for top thickness mm	Number of screws	Art. no.
For move workstation frame C design	30	9×M6	88.234.000
For move workstation leg, H design	40-50	6×M10	88.232.000
For move workstation frame, H design	30-50	12×M8	88.233.000
For workbench leg assembly	40-50	6×M10	39.327.000
For drawer cabinet	40-50	4×M10	39.161.000



All countertops are exclusively pre-assembly and fastening material

applies

o applies in part

Features	Multiplex	Beech	Universal	Eterlux	Nitrile**	Metal coatings	Resin	ABS	PVC mat 4mm
Impact/shock resistance	•	•	•	0		•		•	•
Scratch resistance			•		0				
Dampening			0						
Cleaning / Hygiene			0					•	•
Heat resistance (soldering)				•			0		
Chemical resistance*			0	•	0		•	•	0
Acid resistance*			0	•	0		•	•	0
Alkali resistance*			0	•	0		•	•	0
Resistance to oil and grease*			•	•	•		•	•	•

- incl. visual changes
- Resistant to: good resistance to oil, good or limited resistance to fuel, not recommended for acids, alkalis or acetone. Changes to the surface and slight swelling of the surface caused by using chemicals, oils, soaps, etc. may occur; these are a material property and not a product defect. Excluding threaded inserts (pre-assembled) and fastening material. These must be ordered additionally depending on the substructure.



The recommendations on resistance materials are general indicators and do not take into account secondary factors such as concentration of the agent, temperature, oxidation, etc. The information given is therefore not binding. Depending on the substances, preliminary clarifications are strongly recommended.

■ applies above average

Special and custom solutions on request


Special sizes m ²	Thickness mm	max. size mm	Art. no.
	30	2500×1250	39.879.000
Multiplex	40	2500×1250	39.344.000
	50	2500×1250	41.995.000
Beech	40	3000×1200	39.075.000
	50	3000×1200	39.020.000
Universal	53	3000×1250	39.572.000
Eterlux	52	2750×1250	39.573.000
Nitrile*	43	3000×1000	39.952.000
Nitriie"	50	3000×1000	39.956.000
	23	2740×1200	39.881.000
Resin	30	2700×2000	88.324.000
	40	3000×1000	39.085.000
ABS	40	2000×1000	42.519.000

Customer-specific cut-outs and holes

According to your specifications



^{*} Special size without edges. ABS edge black for nitrile plates 43 and 50 mm. Item no. 39.033.000

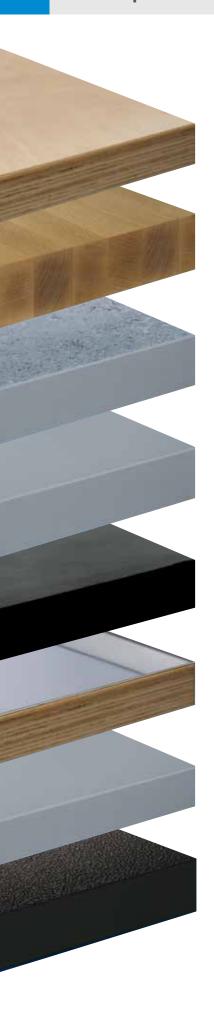

Multiplex

Beech

Universal

Eterlux

Nitrile

Metal coverings


Re	ızi	in

ABS see p. 125

W Width mm		1000				
Depth mm		700	800	1000		
Multiplex	Thickness mm	Art. no.	Art. no. 88.252.000	Art. no. 88.253.000		
Standard	40	-	-	-		
	50	-	=	=		
with rear panel	40	-	-	-		
	50	-	-	-		
with steel edging protection at the front	40	-	=	=		
	50	-	-	-		
with chrome steel sheet coating****	40	-	-	-		
	50	-	-	-		
Beech Standard	40	-	-	-		
	50	-	-	-		
with rear panel	40	-	-	-		
	50	-	-	-		
with steel edging protection	40	-	-	-		
at the front	50	-	-	-		
Universal	53	-	-	-		
Eterlux	52	-	-	-		
Nitrile	43	-	-	-		
	50	-	-	-		
Resin	30**	-	88.268.000	88.269.000		
	40	-	=	-		

^{*} with Multiplex tops 3000 mm = 2×1500 mm glued





For top thickness mm	Depth mm	Art. no.
700	720	89.817.000
750	770	89.818.000
800	820	89.819.000



	12	200				1500		
620	700	800	1000	620	700	750	800	1000
Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.
88.254.000	88.255.000	88.256.000	-	88.258.000	88.259.000	-	88.260.000	88.261.000
-	-	-	-	-	42.850.000	40.025.000	39.035.000	-
-	-	-	-	-	42.854.000	40.045.000	40.185.000	-
-	-	-	-	-	89.616.000	89.624.000	89.632.000	-
-	-	-	-	-	89.620.000	89.628.000	89.636.000	-
-	-	-	-	-	42.874.000	40.035.000	39.767.000	-
-	-	-	-	-	42.878.000	40.055.000	40.195.000	-
-	-	-	-	-	42.898.000	42.906.000	42.914.000	-
-	<u>-</u>	-	-	<u>-</u>	42.902.000	42.910.000	42.918.000	-
-	-	-	-	-	89.684.000	89.692.000	89.696.000	
-	- -	-	-	<u>-</u>	89.688.000	40.001.000	39.015.000	-
-	-	-	-	-	89.716.000	89.724.000	89.732.000	-
-	-		-	-	89.720.000	89.728.000	89.736.000	-
-	-	<u>-</u>	-	-	89.740.000	89.748.000	89.752.000	-
-	-	<u>-</u>	-		89.744.000	40.013.000	39.329.000	-
=	- -	-			-	39.555.000	39.559.000	-
<u>-</u>	<u>-</u>	-		_	<u>-</u>	39.564.000	39.568.000	<u>-</u>
=		<u>-</u>	-	<u>-</u>	- -	48.975.000	48.983.000	<u>-</u>
		-	-		-	48.979.000	48.987.000	-
88.270.000	88.271.000	88.272.000	-	88.274.000	88.275.000	_	88.276.000	88.277.000
-	<u> </u>	- -	-	_	-	39.082.000	39.052.000	<u>-</u>

 $[\]ensuremath{^{**}}\xspace\ensuremath{^{\text{Suitable}}}\xspace$ for move C or H design, workstation frame



Rear panels

The rear panels, which are supplied unattached, are screwed onto the worktop. Fastening material included. Specification: Multiplex, 150 mm high, thickness 20 mm, oiled.

For top thickness mm	Width mm	Art. no.
1500	1500	89.812.000
2000	2000	89.813.000
2500	2500	89.814.000
3000	3000*	89.815.000

 $^{*2 \}times 1500$ mm, adjoining edges




Shelves with raised sides

Specification: MDF worktop with 8 mm raised beech sides and back. Depth 300 mm, thickness 19 mm. Max. supported load 20 kg per linear metre. Colourless coating on all sides, without brackets (see below). Max. distance between supports 1100 mm.

For top thickness mm	required brackets	Art. no.
1500	2	44.043.000
2000	3	44.044.000
2500	3	44.045.000
3000	4	44.046.000

^{***} Chrome steel sheet coating 1.5 mm thick, bent down and screwed at the back, open on the sides, multiplex top is visible.

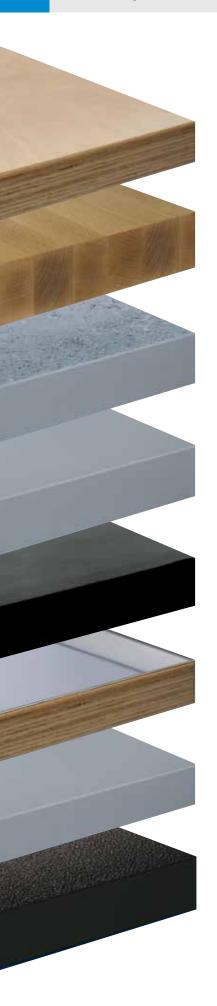

Multiplex

Beech

Universal

Eterlux

Nitrile

Metal coverings

Resin

ABS see p. 125

W Width	mm		2000	
D 7 Depth	nm	620	700	750
	Thickness mm	Art. no.	Art. no.	Art. no.
Multiplex Standard	30**	88.262.000	88.263.000	-
	40	-	42.851.000	40.027.000
	50	-	42.855.000	40.047.000
with rear panel	40	-	89.617.000	89.625.000
	50	-	89.621.000	89.629.000
with steel edging protection at the	40	-	42.875.000	40.037.000
front	50	-	42.879.000	40.057.000
with chrome steel sheet coating****	40	-	42.899.000	42.907.000
	50	-	42.903.000	42.911.000
Beech Standard	40	-	89.685.000	89.693.000
Standard	50	-	89.689.000	40.003.000
with rear panel	40	-	89.717.000	89.725.000
	50	-	89.721.000	89.729.000
with steel edging	40	-	89.741.000	89.749.000
protection at the front	50	-	89.745.000	40.015.000
Universal	53	-	-	39.556.000
Eterlux	52	-	-	39.565.000
Nitrile	43	=	=	48.976.000
	50	-	-	48.980.000
Resin	30**	88.278.000	88.279.000	-
	40	-	-	39.083.000

^{*} with Multiplex tops 3000 mm = 2×1500 mm glued



Brackets, height-adjustable

Enable the shelves with raised sides to be adjusted to four different heights. Adjustment height relative to worktop 230, 270, 310 and 350 mm. They are fixed in place through the workbench top (pre-assembly required). Including fastening material. Specification: made from steel box section, including fastening material for each unit. Colour: light grey, RAL 7035.

Pre-assembly per bracket (please specify position)	-	39.208.000
Brackets, height-adjustable	280	44.047.000
Description	Depth mm	Art. no.



20	000		2500		3000*			
800	1000	700	750	800	700	750	800	
Art. no.	Art. no.	Art. no.	Art. no.	Art. no. Art. no.	Art. no.	Art. no.	Art. no.	
88.264.000	88.265.000	-	-	-	-	-	-	
39.037.000	-	42.852.000	40.028.000	39.039.000	42.853.000	42.858.000	42.860.000	
40.187.000	-	42.856.000	40.048.000	40.188.000	42.857.000	42.859.000	42.861.000	
89.633.000	-	89.618.000	89.626.000	89.634.000	89.619.000	89.627.000	89.635.000	
89.637.000	-	89.622.000	89.630.000	89.638.000	89.623.000	89.631.000	89.639.000	
39.768.000	-	42.876.000	40.038.000	39.769.000	42.877.000	42.882.000	42.884.000	
40.197.000	-	42.880.000	42.058.000	40.198.000	42.881.000	42.883.000	42.885.000	
42.915.000	-	42.900.000	42.908.000	42.916.000	42.901.000	42.909.000	42.917.000	
42.919.000	-	42.904.000	42.912.000	42.920.000	42.905.000	42.913.000	42.921.000	
89.697.000	=	89.686.000	89.694.000	89.698.000	89.687.000	89.695.000	89.699.000	
39.017.000	-	89.690.000	40.004.000	39.018.000	89.691.000	40.005.000	39.019.000	
89.733.000	=	89.718.000	89.726.000	89.734.000	89.719.000	89.727.000	89.735.000	
89.737.000	-	89.722.000	89.730.000	89.738.000	89.723.000	89.731.000	89.739.000	
89.753.000	=	89.742.000	89.750.000	89.754.000	89.743.000	89.751.000	89.755.000	
39.331.000	-	89.746.000	40.016.000	39.332.000	89.747.000	40.017.000	39.333.000	
39.560.000	-	-	39.557.000	39.561.000	=	39.558.000	39.562.000	
39.569.000	=	-	39.566.000	39.570.000	-	-	-	
48.984.000	-	-	48.977.000	48.985.000	-	48.978.000	48.986.000	
48.988.000	-	=	48.981.000	48.989.000	=	48.982.000	48.990.000	
88.280.000	88.281.000	-	=	-	=	-	=	
39.076.000	-	-	39.134.000	39.135.000	-	39.084.000	39.086.000	

 $[\]ensuremath{^{**}}\xspace \ensuremath{^{\text{Suitable}}}\xspace$ for move C or H design, workstation frame

 $[\]ensuremath{^{***}}$ Chrome steel sheet coating 1.5 mm thick, bent down and screwed at the back, open on the sides, multiplex top is visible.



Stop buffer

Stop buffer prevents the mobile drawer cabinet from rolling too deep under the table. The stop buffer is attached to the underside of the countertop (thickness $> 40\,\mathrm{mm}$) with wood screws. Designed for mobile drawer cabinet H: 890 in combination with stationary drawer cabinet H: 850 mm and levelling feet +50 mm

Width mm	Height mm	Art. no. 👋
620	155	69.965.XXX



Support crossbar

By stabilising the countertop using a support crossbar, large spans of up to 2500 mm can be achieved without the use of a third workbench leg assembly. This support crossbar can also be retrofitted to the workbench leg assemblies.

for top width mm	for top depth mm	Load capacity kg	Art. no. 🞇
2000	800	500	89.155.XXX
2500	800	500	89.156.XXX





1150

1400

2420


 2×1460

1070


1320

Dimensions

Distances between supports with 2 or 3 workbench leg assemblies, with or without storage shelf

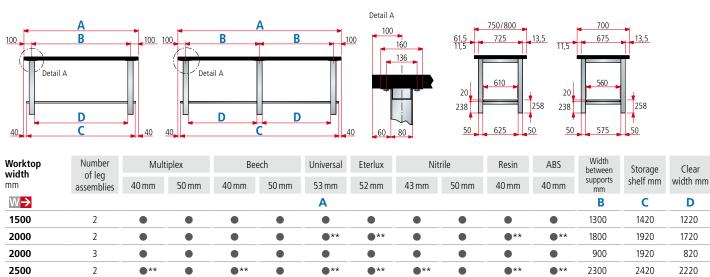

Distances between supports with workbench leg assembly and drawer cabinet 27 × 27 E or 27 × 36 E, with or without storage shelf

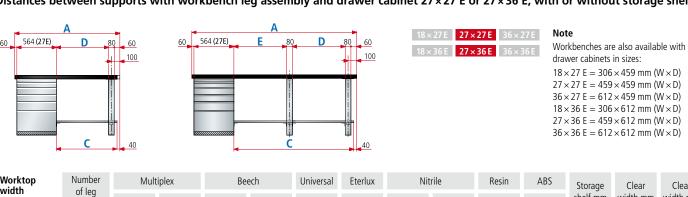

Number	Mult	iplex	Be	ech	Universal	Eterlux	Ni	trile	Resin	ABS	Storage	Clear	Clear
assemblies	40 mm	50 mm	40 mm	50 mm	53 mm	52 mm	43 mm	50 mm	40 mm	40 mm	shelf mm	width mm	width mm
					Α						C	D	E
1	•	•	•	•	•	•	•	•	•	•	835	736	-
1	•	•	•	•	•	•	•	•	•	•	1335	1236	-
1	•	•	•	•	•	•	•	•	•	•	1835	1736	-
2	-	-	-	-	-	-	-	-	•**	**	1835	1070	586
2		•	•	•	•	•		•	•	•	2335	1320	836
	of leg	of leg assemblies 40 mm	of leg assemblies 40 mm 50 mm 1	of leg assemblies 40 mm 50 mm 40 mm 1	of leg assemblies 40 mm 50 mm 40 mm 50 mm 1	of leg assemblies 40 mm 50 mm 40 mm 50 mm A 1	of leg assemblies 40 mm 50 mm 50 mm 53 mm 52 mm 1 • • • • • 1 • • • • • 1 • • • • • 2 - - - - - - -	of leg assemblies 40 mm 50 mm 50 mm 53 mm 52 mm 43 mm 1 •	of leg assemblies 40 mm 50 mm 50 mm 53 mm 52 mm 43 mm 50 mm 1 • </td <td>of leg assemblies 40 mm 50 mm 50 mm 53 mm 52 mm 43 mm 50 mm 40 mm 1 • <td< td=""><td>of leg assemblies 40 mm 50 mm 53 mm 52 mm 43 mm 50 mm 40 mm 40 mm 1 • <td< td=""><td>of leg assemblies 40 mm 50 mm 40 mm 50 mm 52 mm 43 mm 50 mm 40 mm 40 mm 40 mm C 1 • • • • • • • 835 1 • • • • • • • 1335 1 • • • • • • • • • 1835 2 - - - - - - •** •** 1835</td><td>of leg assemblies 40 mm 50 mm 40 mm 50 mm 53 mm 52 mm 43 mm 50 mm 40 mm 40 mm 40 mm 40 mm 40 mm C D 1 • • • • • • • 835 736 1 • • • • • • 1335 1236 1 • • • • • • 1835 1736 2 - - - - - - ** 1835 1070</td></td<></td></td<></td>	of leg assemblies 40 mm 50 mm 50 mm 53 mm 52 mm 43 mm 50 mm 40 mm 1 • <td< td=""><td>of leg assemblies 40 mm 50 mm 53 mm 52 mm 43 mm 50 mm 40 mm 40 mm 1 • <td< td=""><td>of leg assemblies 40 mm 50 mm 40 mm 50 mm 52 mm 43 mm 50 mm 40 mm 40 mm 40 mm C 1 • • • • • • • 835 1 • • • • • • • 1335 1 • • • • • • • • • 1835 2 - - - - - - •** •** 1835</td><td>of leg assemblies 40 mm 50 mm 40 mm 50 mm 53 mm 52 mm 43 mm 50 mm 40 mm 40 mm 40 mm 40 mm 40 mm C D 1 • • • • • • • 835 736 1 • • • • • • 1335 1236 1 • • • • • • 1835 1736 2 - - - - - - ** 1835 1070</td></td<></td></td<>	of leg assemblies 40 mm 50 mm 53 mm 52 mm 43 mm 50 mm 40 mm 40 mm 1 • <td< td=""><td>of leg assemblies 40 mm 50 mm 40 mm 50 mm 52 mm 43 mm 50 mm 40 mm 40 mm 40 mm C 1 • • • • • • • 835 1 • • • • • • • 1335 1 • • • • • • • • • 1835 2 - - - - - - •** •** 1835</td><td>of leg assemblies 40 mm 50 mm 40 mm 50 mm 53 mm 52 mm 43 mm 50 mm 40 mm 40 mm 40 mm 40 mm 40 mm C D 1 • • • • • • • 835 736 1 • • • • • • 1335 1236 1 • • • • • • 1835 1736 2 - - - - - - ** 1835 1070</td></td<>	of leg assemblies 40 mm 50 mm 40 mm 50 mm 52 mm 43 mm 50 mm 40 mm 40 mm 40 mm C 1 • • • • • • • 835 1 • • • • • • • 1335 1 • • • • • • • • • 1835 2 - - - - - - •** •** 1835	of leg assemblies 40 mm 50 mm 40 mm 50 mm 53 mm 52 mm 43 mm 50 mm 40 mm 40 mm 40 mm 40 mm 40 mm C D 1 • • • • • • • 835 736 1 • • • • • • 1335 1236 1 • • • • • • 1835 1736 2 - - - - - - ** 1835 1070

^{*} Multiplex 2×1500 mm glued.

2500

3000*

3

3

^{**} When using the support crossbar, see page 129









Loads

Workbench tops

Max surface loads of the tops. These specifications apply with evenly distributed loads and static applications.








- The maximum load is 400 kg for the fixed workbench leg assembly and 200 kg for the workbench leg assembly with castors with evenly distributed loads and static applications.
- 2 For this version, the load specifications (see tables below) must be halved in each case.



Desk chairs see p. 164–167



Loads with workbench legs or a combination of workbench legs and drawer cabinet



	Top thickness mm	Worktop width mm		Worktop width mm			Wor	ktop width r	mm	Worktop v	Worktop width mm	
		1500	2000	2500	2000	2500	3000	1500	2000	2500	2500	3000
Multiplex	40	600 kg	360 kg	500 kg*	1200 kg	1050 kg	650 kg	1500 kg	800 kg	360 kg	3000 kg	1600 kg
Multiplex	50	800 kg	500 kg	400 kg	1200 kg	1200 kg	1200 kg	1500 kg	1000 kg	500 kg	3000 kg	2000 kg
Beech	40	600 kg	360 kg	500 kg*	1200 kg	1050 kg	650 kg	1500 kg	800 kg	360 kg	3000 kg	1600 kg
Beech	50	800 kg	500 kg	400 kg	1200 kg	1200 kg	1200 kg	1500 kg	1000 kg	500 kg	3000 kg	2000 kg
Universal	53	700 kg	350 kg	500 kg*	900 kg	700 kg	450 kg	1100 kg	700 kg	350 kg	3000 kg	1400 kg
Eterlux	52	700 kg	350 kg	500 kg*	900 kg	700 kg	450 kg	1100 kg	700 kg	350 kg	3000 kg	1400 kg
Nitrile	43	500 kg	320 kg	500 kg*	800 kg	680 kg	360 kg	700 kg	310 kg	320 kg	1800 kg	1100 kg
Nitrile	50	800 kg	450 kg	300 kg	1200 kg	1200 kg	720 kg	1300 kg	600 kg	300 kg	3000 kg	1400 kg
Resin	40	350 kg	500 kg*	500 kg*	650 kg	400 kg	300 kg	650 kg	350 kg	500 kg*	1100 kg	700 kg
ABS	40	350 kg	500 kg*	500 kg*	650 kg	400 kg	300 kg	650 kg	350 kg	500 kg*	1100 kg	700 kg

Overview of universal superstructures

With our universal superstructures, you can design each workstation ergonomically, neatly and individually. The consistent and form-fitting design ensures an attractive appearance and enables virtually invisible cable routing. All superstructures are easy to install and also available as an ESD model.



Cantilever, single, double sided

 Integrated and interlocking design for almost invisible cabling.

see page 139





Rear panels

- Perforated or smooth
- For attaching tool holders
- Smooth rear panels can also be mounted on the back for a complete room partition

see page 140/141

Support pillars

- Flexibly mountable
- Vertically adjustable in increments of 50 mm
- Continuously adjustable horizontally for flexible attachment to any substructure

see page 138/139

Rear power panel


- For accommodating power modules and elements
- Fully integrated into the rear panel
- Simple assembly and dismantling

see page 144



see page 144



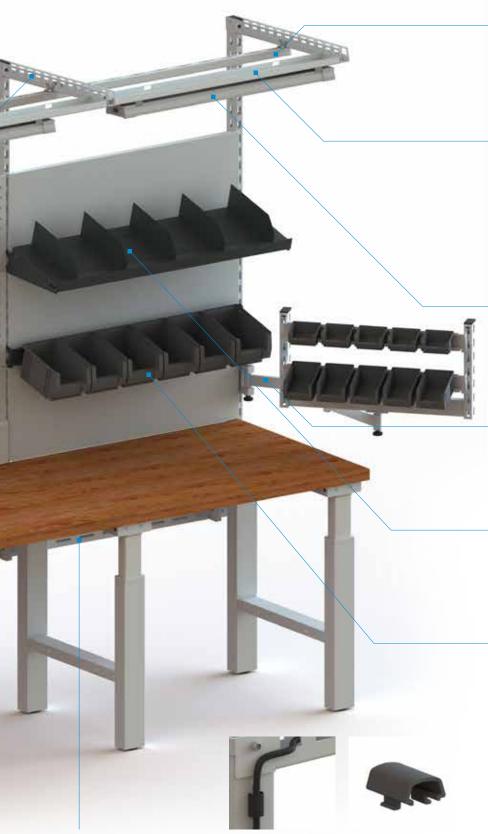

- Equipment rail
 For use with carriages
 Fast and easy assembly
- Linking possible via multiple workstations

see page 139



- Integrated lighting carrierFor accommodating lighting and cabling.
- Interlocking design for almost invisible cabling

see page 139

Lighting

Wide selection of different LED lights

see page 146

Swivel arm

- For mounting on support pillar
- One or two arms
- For holding peripheral devices and accessories

see page 140

Adjustable shelf

- Load capacity up to 50 kg
 Can be attached horizontally or tilted at an angle of up to 15 degrees
- Can be attached largely without tools

see page 140/141

Container strips

- For holding storage containers
- Can be attached horizontally or at an angle of 15 degrees
- Can be attached largely without tools

see page 140/141



ESD protected version available as an option

see page 24-27

Guide rail

• For fastening and horizontal positioning of support pillars

see page 138

Cable routing clip

- Enables clean cable routing, easy installation and removal
- Suitable for support pillars and perforated rear panels


see page 144

Superstructures on the workbench substructure for move H design or workbenches

Support pillars on the workbench substructure






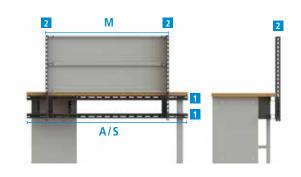

W→	Module width of superstructures mm											
Top width mm	Support rail pair width mm	665	750	1000	1330	1500	2000	Standard	Number of support pillars with standard			
Α	S			N	//				2			
1000	1000	•	•	•	-	-	-	1×1000	2			
1500	1500	•	•	•	•	•	-	1×1500	2			
2000	2000	•	•	•	•	•	•	1×2000	2			
2500	2500	•	•	•	•	•	•	1×1500, 1×1000	3			
3000	3000	•	•	•	•	•	•	2×1500	3			
								possible	- not possible			

Use of TWIN link adapters for drawer cabinet depth 27 E

Different adapter plates (TWIN links) are required to enable different configuration options between countertop depths and drawers with cabinet depths of 27 E. Generally, a TWIN link does not need to be used when **using a drawer cabinet with a depth of 36 E.** The use of the cover profile may be necessary when using a 700 or 750 mm deep countertop, see p. 138.

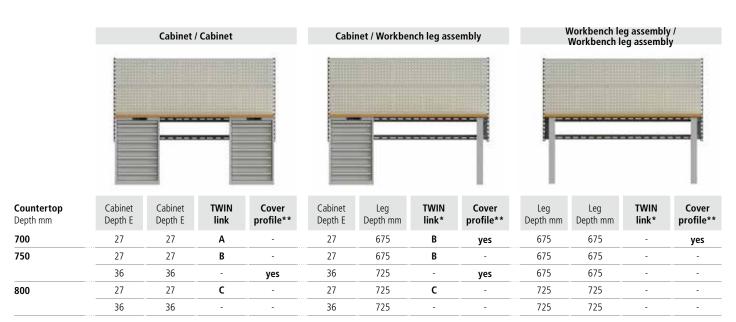


^{*} TWIN link is not required for workbench leg assembly

^{** +50} mm




Configuration of support pillars and rear panels

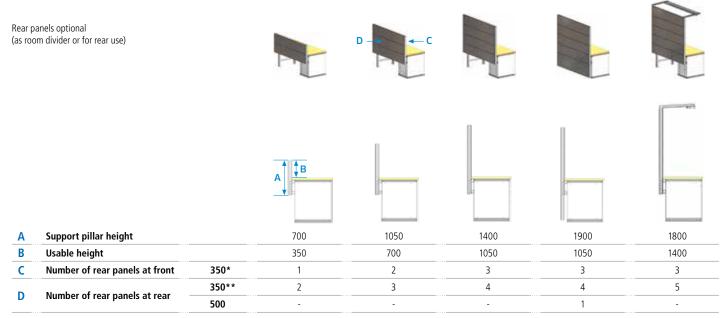

 $^{^{\}star}$ Alternative variant: Power conduit cover plate 150 mm (see p. 144) with a rear panel 200 mm (see p. 140/141) ** Alternative variant: Cable tray (see p. 144)



Superstructures on workbench substructure for workstation frame, C design






Module widths of workstation frame, C design

Support pillars generally on the substructure, load capacity up to 150 kg

	620-800
A	_

Module width of superstructures mm										
Worktop width mm	Frame width mm	665 750 1000 1330 1500 2000 Max. installation width for superstructures Standard							support pillars with standard	
A	G					M				2
1200	1030	•	•	•	-	-	-	1000	1×665	2
1500	1360	•	•	•	•	-	-	1330	1×1330	2
2000	1780	•	•	•	•	•	-	1665	1×665, 1×1000	3
									possible	- not possible

Superstructures on workbench tops for H design, workbenches, compact and system workbenches

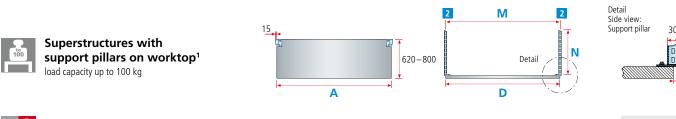

W ->		Number of						
Worktop width mm	665	750	1000	1330	1500	2000	Standard	support pillars with standard
Α				M				2
1000*	•	•	•	-	-	-	1×1000	2
1250**	•	•	•	-	-	-	1×1000	2
1500	•	•	•	•	•	-	1×1500	2
2000	•	•	•	•	•	•	1×2000	2
2500	•	•	•	•	•	•	1×1500, 1×1000	3
3000	•	•	•	•	•	•	2×1500	3

^{*} Worktop width available only for compact workbenches.

¹ Only suitable for mounting on workbench tops made from beechwood and Multiplex.
■ possible - not possible

H Nom. width mm	350	700	1050	1400***				
Pillar height mm	350	700	1050	1400				
	N							
Workbench	•	•	•	•				
Compact workbench	•	•	•	•				
System workbench								

 $[\]ensuremath{^{*\,*\,*}}$ must be stabilised by supporting bracket.

^{**} Worktop width available only for system workbenches.





The preconfigured workstations only consist of the superstructure. Simple expansion and rearrangement to suit specific requirements. The substructures (legs or frame) must be ordered separately.

Lighting must be ordered separately, see page 146



Universal superstructures for workbench leg assemblies

Equipment	for top width mm	Module width mm	Type	mm	Art. no.
2 support pillars for mounting on workbench top	1500	1500	-	700*	89.070.XXX
2 perforated rear panels	2000	2000	-	700*	89.071.XXX
	1500	1500	DE/PE	1460*	89.072.XXX
2 support pillars for mounting on workbench top including left and right support brackets	2000	2000	DE/PE	1460*	89.073.XXX
2 brackets for support pillars	1500	1500	CH**	1460*	89.062.XXX
1 equipment rail including 2 suspension sets 1 carriage	2000	2000	CH**	1460*	89.063.XXX
1 perforated rear panel	1500	1500	F	1460*	89.064.XXX
1 adjustable shelf, plain, depth 350 mm	2000	2000	F	1460*	89.065.XXX
1 power rear panel preconfigured, mounting on support pillar, with 1 switch and 5 sockets 230 V,	1500	1500	GB	1460*	89.066.XXX
including connecting cable	2000	2000	GB	1460*	89.067.XXX



Universal superstructures for workstation frame, C design

- 2 support pillars
- 2 brackets for support pillars
- 1 equipment rail including 2 suspension sets
- 1 carriage
- 1 perforated rear panel
- 2 container strips
- 1 swivel arm fixing device 1 double joint swivel arm

1 swivelling shelf 1500 1330 1210* 89.074.XXX




- 2 brackets for support pillars
- 1 equipment rail including 2 suspension sets
- 1 carriage
- 2 perforated rear panels
- 1 container strip
- 2 adjustable shelves, plain, depth 350 mm
- 1 swivel arm fixing device
- 1 double joint swivel arm
- 1 TFT monitor mount
- 1 rear power panel preconfigured, mounting on support pillar, with 1 switch and 3 sockets 230 V, including connecting cable

	2000	10007003	DETPE	1210	03.073.
	2000	1000/665	CH***	1210*	89.076.XXX
,	2000	1000/665	F	1210*	89.077.XXX
	2000	1000/665	GB	1210*	89.078.XXX



- Height from upper edge of table top mm
- ** Type CH: 1 switch with 1 thermal fuse and 4 socket outlets 230 V
- *** Type CH: 1 switch with 1 thermal fuse and 2 socket outlets 230 V

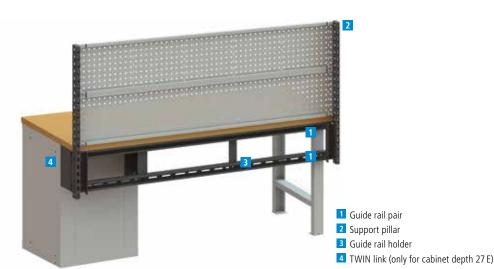

Module width of superstructures

The module width refers to the axis dimension of the superstructures (measured from the centres of the support pillars). The number and dimensions of the modules used may vary depending on the frame and top width. We will be happy to advise you.



- M Module width
- G Frame width
- A Top width

Guide rail pair for fitting to the workbench substructure*

The guide rail pair is available in 5 widths and is designed for the H leg, workbench leg assembly and for the drawer cabinet. Incl. fastening material. Model: Sheet steel, colour as per colour chart.



W → mm	Art. no. 🞇
1000	89.140.XXX
1500	89.141.XXX
2000	89.142.XXX
2500	89.143.XXX
3000	89.144.XXX

^{*} Se si utilizza l'armadio a cassetti T: 27 E è necessario un adattatore TWIN-Link.

Support pillar for mounting on workbench substructure

Scope of delivery: 1 unit

To guide rail pair for

Workbench leg assembly move workstation leg, H design move workstation frame, H design

The support pillars are available in 5 heights. Capacity 150 kg. A guide rail pair is required for fitting. Incl. pillar bracket and fastening material. Model: Steel profile, perforated on four sides in increments of 50 mm for attaching the superstructure components with limited use of screws. For double workstations, the same support pillars are used for both sides. Colour: as per colour chart.

H mm	Usable height mm	Art. no. 🞇
700	350	89.225.XXX
1050	700	89.226.XXX
1400	1050	89.227.XXX
1800	1400	89.228.XXX
1900	1050	89.229.XXX

Guide rail holder

To further stabilize the guide rail pair, this rail holder can be used, which is attached to the underside of the countertop. Model: Sheet steel, colour: as per colour chart.



W→×**D7**×**H**↑ mm 60×272×272

Art. no. **\$\$ 89.130.XXX**

move workstation frame, C design
The support pillars are available in two different heights and are mounted onto the crossbars of the frame using the fastening material provided. Capacity 150 kg. Model: Steel profile, perforated on four sides in increments of 50 mm for attaching the superstructure components with limited use of screws. For double workstations, the same support pillars are used for both sides. Colour: as per colour chart.

1000	350	65.128.XXX
1700	1050 / 1150	65.129.XXX

TWIN link adapter

Different adapter plates (TWIN links) are necessary to enable different configuration options between countertop depths and drawer cabinet depths of 27 E. The required TWIN link size can be found in the matrix on page 134. Model: sheet steel. Colour: as per colour chart.



Cover profiles for workbenchMatching cover profiles fill the gap between the countertop

and support pillar for workbenches (planning information, see page 134). including fastening material. Description: sheet steel. Colour: according to colour chart.



Туре	D 7 mm	Art. no. 🞇
A	52.5	89.149.XXX
В	102.5	89.147.XXX
С	152.5	89.148.XXX

W → mm	D 7	for top thickness mm	Art. no. 🛚 🞇
1500	50	40/50	89.330.XXX
2000	50	40/50	89.333.XXX
2500	50	40/50	89.336.XXX



Support pillars for mounting onto countertops

The support pillars are available in four different heights and must be screwed directly onto the top surface on site using the fastening material provided. Capacity 100 kg. Model: Steel profile, perforated on four sides in increments of 50 mm for attaching the superstructure components with minimum use of screws. Colour: as per colour chart. Only suitable for mounting on countertops made from beechwood and multiplex. Plate thickness min. 40 mm. Mounting options on other countertops on request.

Pillar height mm	Left 💨	Centre 🞇	Right 🐫
350	89.423.XXX	89.420.XXX	89.424.XXX
500	343.328.XXX	344.108.XXX	343.327.XXX
700	89.425.XXX	89.421.XXX	89.426.XXX
1050	89.952.XXX	89.954.XXX	89.953.XXX
1400*	89.427.XXX	89.422.XXX	89.428.XXX

^{*} When loaded to capacity, a support bracket is mandatory (see below).



Support bracket

To provide additional stability for the support pillars on the countertop. Mandatory from pillar heights of 1400 mm. Model: Sheet steel. Colour: as per colour chart.


	AIL III.
Left	89.433.XXX
Right	89.434.XXX



Support pillars for wall mounting

For mounting rear panels, adjustable shelves and container strips directly to the wall. Fastening material included. Specification: Steel U-profile, increments of 50 mm, sinkhole for wall mounting every 200 mm on concrete wall (nylon wall plugs No. 8 and countersunk screw 5×70). Colour: as per colour chart. Swivel shelves cannot be attached to wall-mounted rails.

H ↑ mm	Width mm	Depth mm	Art. no. 🞇
350	30	40	89.435.XXX
700	30	40	89.436.XXX
1050	30	40	89.437.XXX



Cantilever

The cantilever is fastened to the support pillar and serves to hold the equipment rail and the lighting carrier. In addition, the cantilever ensures clean and almost invisible cable routing as a cable conduit. The double-sided version is used for double workstations.

Incl. fastening material. Load capacity 15 kg. Model: sheet steel. Colour: as per colour chart.

	Art. no.
Simple	89.232.XXX
Double-sided	89.233.XXX





Equipment rail

For supporting the carriage. The equipment rail is attached directly to the cantilever and can be individually adjusted in depth. Load capacity 15 kg. (Delivery excluding carriage: **89.452.000**).

Sheet steel version. Colour: as per colour chart.

Width mm	Art. no. 🞇
665	89.240.XXX
750	89.241.XXX
1000	89.242.XXX
1330	89.244.XXX
1500	89.245.XXX
2000	89.246.XXX
2500	89.247.XXX




Lighting support

The lighting carrier is mounted directly on the cantilever without tools and can be individually adjusted in depth. It serves to hold LISTA lighting (see page 146) and ensures clean and almost invisible cable routing. Module widths 1665 mm (89.001.XXX) and 1750 mm (89.000.XXX) are also available for special configuration purposes. Model: Sheet steel, colour: as per colour chart.

Module width mm	Art. no. 🜋
665	89.234.XXX
750	89.235.XXX
1000	89.236.XXX
1330	89.237.XXX
1500	89.238.XXX
2000	89.239.XXX





Perforated rear plain or panels

The support pillars can be vertically fitted with rear panels, either partially or up to their full height. All rear panels can be attached to the support pillars without screws. Rear panels perforated with square holes 10×10 mm, 38 mm division and slots 380 mm apart for accommodating storage shelves and can holders (see p. 141). Specification: sheet steel. Colour: as per colour chart.

for module width mm		665				
W <mark>→</mark>	Usable width mm	655			sable width mm 655	
Η <mark>↑</mark>	Specification	Art. no.				
200	plain	89	9.031.XX	(
350	plain	89.043.XXX				
500	plain	89.049.XXX				
200	perforated	89.025.XXX				
350	perforated	89.037.XXX				
500	perforated	89.113.XXX				
W <mark>→</mark>	Usable width mm	660 Art. no. % 65.234. XXX				
Н∱						
85						
Contai	ner size	2 3 4				
Numbe	er of containers	6-12 6 4				

Container strips To hold size 2 3 and 4 st

To hold size 2, 3 and 4 storage containers; can be attached to the support pillars without screws. Max. load capacity 15 kg. Specification: sheet steel. Colour: as per colour chart.

W→	Usable width mm	664
D 7	Specification	Art. no. 🞇
200	plain	65.257.XXX
300	plain	65.258.XXX
350	plain	89.845.XXX
400	plain	65.260.XXX
200	slotted	-
300	slotted	89.822.XXX
350	slotted	89.828.XXX
400	slotted	89.834.XXX



Adjustable shelves, plain or slotted

The adjustable shelves are fitted with a stop bar on one of their longitudinal sides. The adjustable shelves can be attached with the stop bar on either the front or the rear. For adjustable shelves, slotted: slots 15 mm apart for partitioning with dividers. Using two brackets, the adjustable shelves are attached to the support pillars without screws, either horizontally or with an inclination angle of 15°. Load capacity 50 kg. Normal level 25 mm + 17 mm stop bar. Including two brackets each. Specification: sheet steel. Colour: as per colour chart.

 I
keja
150

Swivel arm attachments

For accommodating the swivel arm elements directly on the table frame (individual workstation) or on the support pillar. Table frame holder galvanised. Specification: steel. Colour: light grey, RAL 7035.

Fixing to	Width mm	Height mm	Depth mm	[kg]	Art. no.
Table frame	30	280	30	25	65.244.000
Support pillar	30	105	123	25	65.346.000



Swivel arm

Double-jointed swivel arms with 1 axis and 1 swivel arm add-on. The swivel arm add-ons are fitted with internal slide bearings. The swivel radius is 300 mm. Specification: steel. Colour: light grey, RAL 7035. Without swivel arm fixing device.

Specification	Length mm	kg	Art. no.
Double-jointed swivel arm	2×300	25	65.347.000



Module frames for swivel arm

Welded steel tube frame with perforations on four sides. Perforations at 50 mm increments, with steel axis for fixing onto the swivel arm. Load capacity 25 kg. Specification: sheet steel. Colour: light grey, RAL 7035.

Version with	Width mm	Height mm	Depth mm	Art. no.
1 rear panel	665	350	65	65.350.000
2 adjustable shelves*	665	350	265	65.351.000
2 swivel shelves	665	350	424	65.353.000
3 container strips	665	350	90	65.352.000

^{*} Depth of adjustable shelf 200 mm.

Swivel shelves for swivel arm

Swivel shelves for swivel arm, with steel axis for fixing onto the swivel arm add-on, with stop bar on both sides. Tilt angle can be infinitely adjusted by up to 30°. Specification: sheet steel. Colour: light grey, RAL 7035.

Width mm	Depth mm	Height mm	kg	Art. no.
300	426	72	25	65.354.000



750			1000			1330			1500		2000		
740			990			1320			1490			1990	
Art. no.	**	Ar	rt. no. 🎇		Ar	Art. no. 🞇			Art. no.		Art. no.		
89.032			9.033.XXX			9.034.XXX			39.035.XXX			9.036.XXX	
89.044	XXX	89	9.045.XXX	(89	9.046.XXX			39.047.XXX		8	9.048.XXX	
89.050	.XXX	89	9.051.XXX	(89	9.052.XXX			39.053.XXX		8	9.054.XXX	
89.026	.XXX	89	9.027.XXX	(89	9.028.XXX			39.029.XXX		8′	9.030.XXX	
89.038.XXX 89.114XXX 745 Art. no.		89	9.039.XXX	(89	89.040.XXX 89.116.XXX		89.041.XXX 89.117.XXX		89.042.XXX 89.118.XXX			
		86	9.115.XXX	[89								
			995		1325		1325		1495		1995		
		Ar	rt. no. 🎇)	Ar	Art. no. 🞇		Art. no. 🞇		Art. no. 🞇			
89.460	.XXX	65.085.XXX		65.235.XXX		89.461.XXX		89.462.XXX					
2 3	4	2	3	4	2	3	4	2	3	4	2	3	4
7-14 7	5	9-18	9	6	12-24	12	8	14-28	14	10	19-38	19	13
749	9		999			1329			1499			1999	
Art. no.	**	Ar	rt. no. 🛚 🎇	**		Art. no. 🞇 Art. no. 🧩		Α	rt. no. 🛚 🞇				
89.840	XXX	65	5.261.XXX	(65	5.263.XXX		89.841.XXX		89.842.XXX			
89.901	.XXX	65	5.132.XXX	(65	.264.XXX		89.843.XXX		89.844.XXX			
89.902.XXX		89	9.903.XXX	(89	9.846.XXX		89.847.XXX		89.848.XXX			
89.849.XXX		65	5.262.XXX	[65	.266.XXX		89.850.XXX		89.851.XXX			
-			-			-			-			-	
89.823.XXX		89	9.824.XXX	[89	9.825.XXX		89.826.XXX			89.827.XXX		
89.829	XXX	89	9.830.XXX	[89	9.831.XXX			39.832.XXX		8	9.833.XXX	
89.835.XXX					89.837.XXX		89.838.XXX		89.839.XXX				

Add-ons for perforated rear panelsCan be hooked into the slots on the rear panels. Storage shelf with stop bar at the front, 15 mm. Colour: black, NCS S 9000-N.

Specification	Width mm	Depth mm	Height mm	Art. no.
Additional rack	380	310	70	81.081.000
Spray can holder	380	74	70	81.083.000

Dividers


For subdividing slotted adjustable shelves. Specification: sheet steel. Colour: as per colour chart. Sales unit: 10 pcs.


•	·	•
Depth mm	Height mm	Art. no. 🞇
300	100	50.103.XXX
300	150	50.104.XXX
300	200	50.105.XXX
350	100	50.106.XXX
350	150	50.107.XXX
350	200	50.108.XXX
400	100	50.109.XXX
400	150	50.110.XXX
400	200	50.111.XXX

TFT monitor bracket and keyboard shelf

TFT monitor bracket for attaching flat screens with a VESA base plate. Hole pattern 75×75 mm and 100×100 mm, continuously adjustable tilt angle. Keyboard shelf for mounting on the monitor holder. Versions: sheet steel. Colour: Light grey, RAL 7035.

Specification for	Width mm	Height mm	Depth mm	Art. no.
Swivel arm	120	155	60	65.356.000
Keyboard support	600	155	200	65.357.000













Schematic diagram

The LED lighting and power supply system from LISTA meets the high requirements for modern and ergonomic workstations. The combined lamps and power strips make simple workstations functional system solutions for maximum ergonomics and cost-effectiveness. Good lighting and a tidy workstation are essential for high-quality, accurate work.

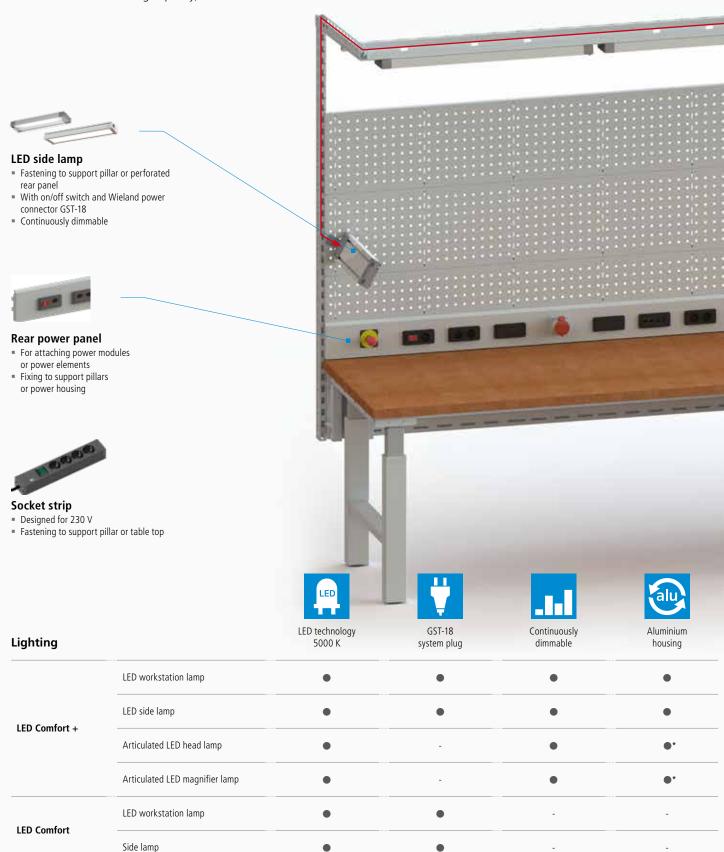

* Aluminium struts www.lista.com



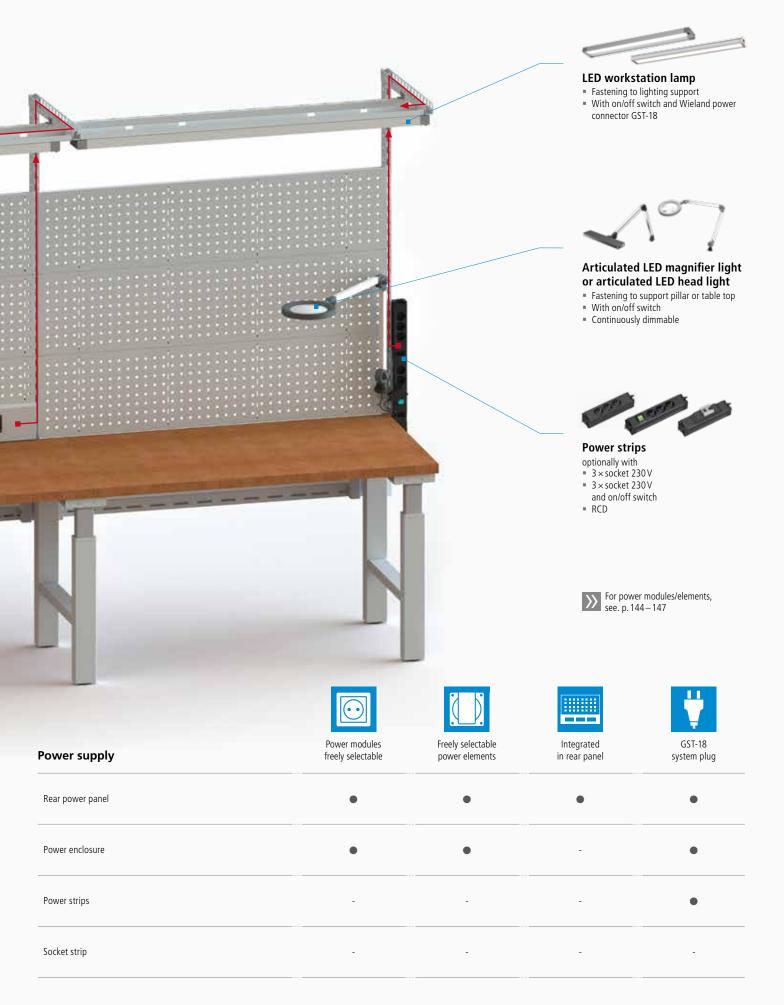

Rear power panels and housings



Please note:

All power elements must be wired on site.



For attaching power modules or power elements (see page

145). Simple, tool-free mounting on support pillars or power

housing. A blind cover (89.543.000) is mandatory for unused

fields. Height: 150 mm. Model: Colour as per colour chart.



Power housing

The solution for mounting without support pillars. Direct mounting on the countertop, incl. punch-out at the side and base. Height: 150 mm. Model: Sheet steel, colour: as per co-



Cable trough

The cable tray is used to hold routing cables neatly. Depending on the module widths, the cable tray can be inserted without tools, similar to a rear panel. Height: 350 mm. Model: Sheet steel, colour: as per colour chart.

W→ Module width mm	665	750	1000	1330	1500	2000
	Art. no 🞇					
Rear power panel for power modules	89.014.XXX	89.015.XXX	89.016.XXX	89.017.XXX	89.018.XXX	89.019.XXX
Layout						
Number of power modules	2	3	4	5	6	8
Rear power panel for power modules and elements	-	-	-	-	89.020.XXX	89.021.XXX
Layout						
Number of power modules					4	6
Number of power elements					3	3
Housing	-	-	89.002.XXX	-	89.004.XXX	89.005.XXX
Cable trough	89.055.XXX	89.056.XXX	89.057.XXX	89.058.XXX	89.059.XXX	89.060.XXX

Power and connection cables



Rear power panel

System socket power cable

Simple and quick electrical installation via 3-pin connector system. Length: 3 m.

Туре	Art. no
СН	89.544.000
Schuko	89.545.000
FR	89.545.000
GB	89.546.000



Intermediate coupling

For interlinking power modules 1-4 and 6. Power modules which are not mounted next to one another are connected via a connection cable. Colour: black.

Туре	Art. no
Type I	89.552.000
Туре Т	89.551.000
Type U	89.577.000



Connection cable

3-pin connector system with socket and plug.

Length m	Art. no	
0.5	89.547.000	
1	89.548.000	
2	89.549.000	
3	89.550.000	



Cable routing clip

	Art. no
Set 8×	89.024.000



Power modules



Power module 1 $1 \times \text{switch}$ 1×socket outlet 230 V



Power module 1 type CH 1 × overcurrent protection (thermal fuse 10A) $1 \times switch$



Power module 2 2 × socket 230 V



Power module 3 $1 \times single-pin$ circuit breaker, 16 A (CH: 10 A)



Power module 4 1×FI safety switch 25A/30mA



Power module 6 Emergency stop button

	Art.no.	Art. no.				
	=	-	-	-	89.541.000	89.540.000
CH (Type J)	-	89.598.000	89.530.000	89.579.000	-	-
Schuko (Type F)	89.535.000	-	89.531.000	89.542.000	-	-
FR (Type E)	89.536.000	-	89.532.000	89.542.000	=	-
GB (Type G)	89.537.000	-	89.533.000	<u>-</u>	=	-



Blind cover for subsequent addition of power modules



Power module 7 2×2 RJ45 network sockets, without network cable, plug + play, cat 6



Power module 8 2×DN7 compressed air connections, input: DN5 plug-in nipple, output: DN5 quick-release cou-



Power module 9 1 × socket outlet 230 V 2 × power USB



Power module 10 1 x socket outlet 230 V 1×RJ45, without network cable, plug + play, cat 6



Power module 11 1 × overcurrent protection (thermal fuse 10A) 1 × socket outlet 230 V

	Art. no.	Art. no.	Art.no.	Art. no.	Art. no.	Art. no.
	89.543.000	89.538.000	89.539.000	-	-	-
CH (Type J)	-	-	-	89.389.000	89.388.000	89.595.000
Schuko (Type F)	-	-	-	89.385.000	89.381.000	-
FR (Type E)	-	-	-	89.386.000	89.382.000	-
GB (Type G)	-	-	-	89.387.000	89.383.000	-

Power elements



Emergency stop switch* (Switching via the contactor)



400 V 16 A socket **

89.090.000



Compressed air connection* (Compatible: RECTUS 25 / RECTUS 1600 / 1625 TEMA 1600, connection G 3/8")

89.105.000



Blind adapter plate

89.088.000



CEE 240 V socket*

CH	89.101.000
Schuko	89.102.000
FR	89.103.000
GB	89 104 000

When using the emergency stop switch, 400 V socket or CEE 240 V, a protective cover (Art. no. 89.107.000) on the rear must be fitted on site.

Compressed air strip for support pillar

Compressed air strip for support pillar, with 2 compressed air boxes, inside diameter 7.2, and one coupling plug in the end cap. Including fastening material for support pillar. Specification: sheet steel. Colour: light grey, RAL 7035.

Connections	W → D	M mm	Art.no.
2 × Com- pressed air	60	50 150	65.281.000





89.100.000

LED Comfort +



LED workstation lamp

The workstation lamp is mounted on the lighting support (see page 139). With On/Off switch and Wieland power connector GST-18. Infinitely dimmable. Glare suppression: structured screen. Colour temperature: neutral white 5000 K. Colour reproduction: Ra > 80. Description: aluminium housing, colourless anodised. Including fastening material. Excluding power and connecting cable (see page 144). A Waldmann development.

Length mm	Power W	Luminous flux Im	k lm max. illuminance lx* System connection GST-18		Installation	Art. no.
450	15	1100	499	Input -		89.265.000
900	35	3000	3000 1279 Input/Output		-	89.266.000
1500	63	5000	1770	Input/Output	-	89.267.000



LED side lamp

The side lamp can be mounted on the support pillar or perforated rear panels. With On/Off switch and Wieland power connector GST-18. Infinitely dimmable. Glare suppression: structured screen. Colour temperature: neutral white 5000 K. Colour reproduction: Ra > 80. Description: aluminium housing, colourless anodised. Including fastening material. Excluding power and connecting cable (see page 144). A Waldmann development.

Length mm	Power W	Luminous flux lm	max. illuminance lx*	System connection GST-18	Installation	Art. no.
450	15	1100	499	Input	right	89.268.000
450	15	1100	499	Input	left	89.269.000



LED swing arm lamp

The swing arm lamp can be mounted on the support pillar or any position on the table top. With On/Off switch. Infinitely dimmable. Glare suppression: structured screen. Colour temperature: neutral white 5000 K. Colour reproduction: Ra > 80. Arm length: 823 mm. Description: Plastic housing and articulated arms of colourless anodised aluminium. Including table clamp. Separate fixing bracket for mounting on support pillar. Colour: grey, 89.183.000. Including 3 m cable; mains plug CEE 7/16 (Europlug), BS 1363 and NEMA 1-15P. A Waldmann development.

Length mm	Power W	Luminous flux lm	max. illuminance lx**	Ballast	Installation	Art. no.
360	14	1330	2604	100 – 240 V 50 / 60 Hz	-	89.270.000



LED articulated arm magnifier lamp

The articulated magnifier lamp can be mounted on the support pillar or any position on the table top. With On/Off switch. Infinitely dimmable. Colour temperature: neutral white 5000 K. Colour reproduction: Ra > 80. Arm length: 823 mm. Description: Plastic housing and articulated arms of colourless anodised aluminium. Including table clamp. Separate fixing bracket for mounting on support pillar. Colour: grey, 89.183.000. Including 3 m cable; mains plug CEE 7/16 (Europlug), BS 1363 and NEMA 1-15P. A Waldmann development.

Magnifier	Dioptres	Power W	Luminous flux Im	max. illuminance lx***	Ballast	Art. no.
ø 160	3.5	15	-	7070	100 – 240 V 50 / 60 Hz	89.271.000

LED Comfort



The workstation lamp is connected to the lighting support (see page 139). With On/Off switch and Wieland power connector GST-18. Colour temperature: neutral white 5000 K. Colour reproduction: Ra > 80. Description: PVC plastic housing, white including fastening material. Excluding power and connecting cable (see page 144).

Length mm	Power W	Luminous flux Im	max. illuminance lx*	System connection GST-18	Art. no.
450	10	1000	367	Input	89.272.000
900	30	3000	1073	Input/Output	89.273.000
1500	50	5000	1904	Input/Output	89.274.000



LED side lamp

The side lamp can be mounted on the support pillar or perforated rear panels. With On/Off switch and Wieland power connector GST-18. Colour temperature: neutral white 5000 K. Colour reproduction: Ra > 80. Description: PVC plastic housing, white including fastening material. Excluding power and connecting cable (see page 144).

Length mm	Power W	Luminous flux Im	max. illuminance lx*	System connection GST-18	Art. no.
450	10	1000	367	Input	89.275.000



Magnetic bracket for Comfort + and Comfort


Practical accessories for attaching LISTA Comfort + and Comfort workstation lighting to or under the cabinets using a magnet. Contents: 4 enclosed magnets incl. fastening material


Art. no.

89.262.000 Magnet set

^{***}Measuring field: 30 ×30 cm/Measuring distance: 15 cm



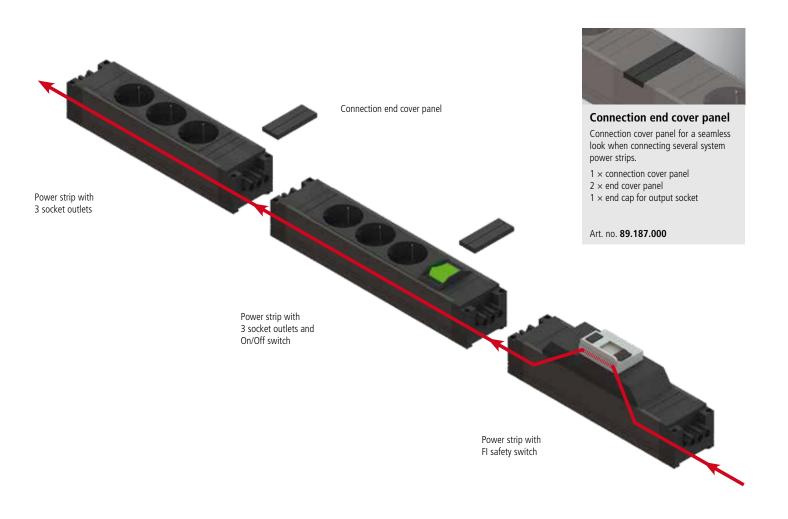



Input/output via system connector 230 V (Wieland system connector GST-18). System power strips can be directly connected to each other. CH version with thermal fuse 10 A. Description: plastic, black. Including fastening material for support pillar bracket. Excluding power and connecting cable, see page 144.



Description	Connector type	On/Off switch	Socket outlets	Art. no.
Power strip	D / PE	-	3	89.174.000
with socket outlets 230 V	СН	=	3	89.175.000
	F	-	3	89.176.000
	GB	-	3	89.177.000
Power strip	D / PE	•***	3	89.178.000
with socket outlets 230 V and On/Off switch	СН	•***	3	89.179.000
	F	•***	3	89.180.000
	GB	•***	3	89.181.000
Power strip with FI safety switch*****	via GST-18	-	-	89.182.000

Socket strip

Designed for 230 V. CH version with thermal fuse 10 A. Description: plastic, black. Including fastening material for workbench top and support pillar bracket. Including connecting cable, length 2m.




Description	Connector type	On/Off switch	Socket outlets	Art. no.
Socket strip	D / PE	•	4	89.170.000
with sockets 230 V	СН	•	4	89.171.000
	F	•	4	89.172.000
	GB	•	4	89.173.000

Hexagonal workbenches and vices









Hexagonal workbenches

With Multiplex top and 6 drawer cabinets, including pre-assembly and fastening material.

Multiplex top thickness	40 mm
Height of drawer cabinet	800 mm
Drawer cabinet width	564 mm
Drawer cabinet depth	725 mm
Drawer load capacity	75 kg

27×36 E






W <mark>→</mark> mm	mm	mm		kg	6 cabinets with number of drawers each mm	â	Art. no. 🞇	
2500	2165	840	Multiplex	1500	4 : ${2 \times 100 / 1 \times 200 / 1 \times 300}$	KEY Lock	89.200.XXX	
2500	2165	840	Multiplex	1500	5: 1×50 / 2×100 / 1×150 / 1×300	KEY Lock	89.201.XXX	



Power attachment module

in double-decker version





Hexagonal power attachment covers

For attaching power modules or power elements (see page 145). 6 attachment covers are required in each case; here you can freely choose between the two variants.

Edge length mm	H 1	Number of power modules	Number of power elements	Art. no. 🞇	
620	155	2	-	89.080.XXX	
620	155	1	2	89.081.XXX	



When ordering a workbench from these two pages with CODE Lock, please add the suffix "C" or for RFID or AUTO Lock "F" or "A" in addition to the article number from the table (e.g. 78.897.XXX.C).

>>> Locking systems see pp. 28–31



Hexagonal cover plate

Multiplex 20 mm, incl. grooved recess for attaching and securing the power attachment covers.

531	89.083.000
Edge length mm	Art. no.



"Gressel" vice system

Forward-opening vice with off-centre design enables vertical clamping of up to 4 inch round stock. With protected square guide, for maintenance-free precision. Unlimited applications thanks to the patented 90° swivelling clamp. Anvil and saddle aids enable optimum machining of pipes and other work pieces. Specification: spheroidal graphite iron, with two exchangeable hewn jaws, fastening material included. Colour: stationary elements dust grey, RAL 7037, movable elements cobalt blue, RAL 5013.

Specification	Opening of jaws mm	Jaw width mm	Art. no.
Gressel AX 100	110	100	39.983.000
Gressel AX 125	135	125	39.984.000
Gressel AX 160	170	160	39.985.000

Pre-assembly of "Gressel" and "Heuer" vice

Pre-assembly (holes) excluding fastening material.

Position pre-assembly	Art. no.	
left	44.131.000	
centre	44.132.000	
right	44.133.000	



Note

With workbench tops not made of solid wood (e.g. Urphen, resin), vice underlays are mandatory (on request).

"Heuer" vice system

Forward-opening vice for vertical clamping of round material, centrally adjustable guides, forged tube jaws and strong anvil as well as fixed jaws. Proven double prismatic guide prevents dirt and damage. Two-year guarantee. Specification: drop-forged steel, surface-hardened fixed jaws, Spindle completely galvanised, including fastening material. Colour: Anthracite grey, RAL 7016

Specification	Opening of jaws mm	Jaw width mm	Art. no.
Heuer 100120	150	120	44.990.000
Heuer 100140	200	140	44.991.000



Vice cabinet on request.





Compact workbenches



Compact workbenches made by LISTA provide versatile, modern workstations for production, workshop and hobby use. Their robust design and high-quality materials make them especially durable and able to withstand even severe conditions. Various substructures ensure that there is plenty of storage space.





Art. no. **64.127.020** Pale grey, RAL 7035

Compart-

1×350



500 × 600 mm















	Top width mm	Housing mm	H 4
1	IIIIII		

1820

width mm	mm	mm		of drawers mm	ments with doors	Shelves	Art. no. 🗱
1000	640	840	Multiplex	1 : 1 × 150	1×350	1	64.103.XXX
1000	640	850	Beech	1 : 1 × 150	1×350	1	64.105.XXX
1000	640	840	Multiplex	4 : 2×100 / 2×150	-	-	64.106.XXX
1000	640	850	Beech	4 : 2 × 100 / 2 × 150	-	-	64.108.XXX
1500	1230	840	Multiplex	4 : 2×75 / 1×150 / 1×200	1×500	2	64.115.XXX
1500	1230	850	Beech	4 : 2×75 / 1×150 / 1×200	1×500	2	64.117.XXX
1500	1230	840	Multiplex	2 : 2 × 150	2×350	2	64.118.XXX
1500	1230	850	Beech	2 : 2×150	2×350	2	64.120.XXX
2000	1820	840	Multiplex	4 : 3 × 150 / 1 × 200	1×350	3	64.124.XXX

Number

		-					
2000	1820	840	Multiplex	7 : 5 × 100 / 2 × 150	2×350	2	64.127.XXX
2000	1820	850	Beech	7 : 5 × 100 / 2 × 150	2×350	2	64.129.XXX
2000	1820	840	Multiplex	2 : 2×150	2×350	2 / 2*	64.130.XXX
2000	1820	850	Beech	2 : 2 × 150	2×350	2 / 2*	64.132.XXX

4: 3 × 150 / 1 × 200

2500	2410	840	Multiplex	10 : 4×75 / 4×100 / 2×150	2×500	4	64.133.XXX
2500	2410	850	Beech	10 : 4×75 / 4×100 / 2×150	2×500	4	64.135.XXX
3000	2410	840	Multiplex	10 : 4×75 / 4×100 / 2×150	2×500	4	64.136.XXX
3000	2410	850	Beech	10 : 4×75 / 4×100 / 2×150	2×500	4	64.138.XXX

100 mm

* centre recessed shelves.


150 mm

64.126.XXX



Plastic box set

For drawer height mm	Art. no.
75	56.160.000
100, 125	56.161.000
12 plastic boxes:	100 × 200 mm
6 plastic boxes:	$100 \times 100 \text{mm}$



Beech

Partition set

10 crosswise dividers

Art. no.
56.172.000
56.173.000
56.174.000



Partition set

4 crosswise dividers

For drawer height mm	Art. no.
75	56.175.000
100, 125	56.176.000
150	56.177.000
200, 150	56.178.000
3 lengthwise dividers 4 crosswise dividers	100 mm

Compact workbenches

With Multiplex or beech worktop and housing.

Multiplex top thickness	40 mm
Beech top thickness	50 mm
Height of workbench	
substructure	800 mm
Depth of housing/	
worktop	695/700 mm
Drawer load capacity	75 kg
Shelf load capacity	25 kg

Note

Preconfigured workbenches are equipped with various types of locks. Other worktop specifications (Urphen, chrome steel coating) on request.



Universal superstructures

The modular system – for universal use with all LISTA workbenches and workstation systems. The compatible superstructure system stands out in terms ease of integration. Only compatible when mounting on table top.



Universal superstructures see p. 132



Separate components see p. 154



High load capacity up to 1.0 t

The sturdy construction and high-quality materials provide a stable system.

Can therefore handle total loads of up to 1.0 t without any problems.

For colour information see fold-out page. When ordering, please use the desired three-digit colour code (instead of XXX).



System workbenches







Art. no. 41.769.050 Housing: Light grey, RAL 7035. Fronts: Metallic grey, NCS S 6502-B (excluding vice)

700 mm

H 1 840 / 877 mm















Top width mm	Housing mm	Н↑		Number of drawers mm	Compart- ments with doors	Adjustable shelves	Art. no. 🞇
1250	1116	877	Multiplex	6 : 2 × 75 / 4 × 150	1×450	-	41.514.XXX
1250	1116	877	Multiplex	5 : 2×75/1×100/ 1×150/1×200	1×600	1	41.769.XXX
1500	1116	840	Multiplex	2 : 2×150	2×450	-	41.430.XXX
1500	1116	840	Multiplex	5 : ${1 \times 100/3 \times 150/1 \times 200}$	1×450	-	41.438.XXX
2000	1654	840	Multiplex	6 : 6 × 150	2×450	-	41.721.XXX
2000	1654	840	Multiplex	3 : 3×200	1×600	2	41.722.XXX







Trough sets

For drawer height mm 75-300 41.468.000

9 troughs: 4 trough parts, Ø33 mm* 40 trough walls: 4 trough parts, Ø33 mm*

* Note usable height of the drawer depending on the goods to be stored.







Sets of plastic boxes

For drawer height mm

75	41.471.000
100	41.472.000
12 plastic boxes:	75×150 mm
3 plastic boxes:	150 × 150 mm



Also available as mobile design with two swivel castors and two fixed castors made of solid rubber, with brakes and push handle, supported load per castor 100 kg. The push handle for mobile system workbenches is ergonomic and stable and made from plastic-coated tubular steel.



Slotted dividers and metal separators

For drawer height mm Art. no. 75 41.477.000 100 41.478.000 150-300 41.479.000 2 slotted dividers: 30 E 6 metal separators: 9 E

System workbenches

With Multiplex top and housing. Multiplex top thickness 40 mm Height of housing 680 mm Clear width of housing 600 mm Height of workbench 120 mm leg assemblies

All mobile system workbenches are also equipped with 1 push handle, 4 castor holders with 2 fixed and 2 swivel castors with brakes (solid rubber Ø 125 mm) Height of castor holders including castors 157 mm 400 kg Load capacity

Note: Preconfigured workbenches are equipped with various types of locks. Other worktop specifications on request.



Universal superstructures

The modular system – for universal use with all LISTA workbenches and workstation systems. The compatible superstructure system stands out in terms ease of integration.

Note

Only compatible when mounting on table top.

Universal superstructures see p. 132



Separate see p. 155 Separate components

Internal drawer height lower than drawer front. For partition material height see p. 262 – 265.

Partition material sets without clip-on label holder.



Compact workbenches | Individual parts



Compact workbench substructure

To secure all drawers simultaneously, the workbench housing can be individually configured with the KEY Lock locking system. In addition, different drawer heights and doors can be selected.

D 7 700 mm	H ↑ 800 mm	

W for top width mm	1000	1500	2000	2500	3000
Base	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.
without shelves	64.300.XXX	64.301.XXX	64.302.XXX	64.303.XXX	64.303.XXX
with 2 recessed shelves	-	_	64.304.XXX	_	_
housing (W × D mm)	640×695	1230×695	1820×695	2410×695	2410×695
Clear height (mm)	500	500	500	500	500
Number of compartments	1	2	3	4	4
+ KEY lock separately lockable	64.417.000	64.417.000	64.417.000	64.417.000	64.417.000
Number of locks required	1	1	2	2	2
Floor anchoring					
can be attached, retrofittable	90.177.000	90.177.000	90.177.000	90.177.000	90.177.000
Height adjustment					
retrofittable. Height-adjustable in 50 mm increments of 800 – 1050 mm.	64.414.000	64.414.000	64.414.000	64.409.000	64.409.000
Colour: Anthracite grey, RAL 7016	Set with 4 pieces	Set with 4 pieces	Set with 4 pieces	Set with 6 pieces	Set with 6 piece



Multiplex panels

Beechwood top glued in multiple layers, sanded and surface-treated, bevelled top edges.

Multiplex with chrome steel sheet coating 1,5 mm thick, bent down and screwed at the back, open on the sides, multiplex top is

Thickness 40 mm

64.570.000

64.571.000 64.572.000

64.573.000

64.574.000*



Beechwood top

solid glued beech top, sanded and surface-treated. Bevelled long edges, for high mechanical 40 mm

Thickness

85.246.000 85.247.000 85.248.000

85.249.000

85.250.000



visible.

load.

Thickness 50 mm

64.581.000 64.580.000

64.582.000

64.582.000

64.584.000

 $*2 \times 1500$ mm with butt joint



Drawer

Every drawer has a full extension runner with a load capacity of 75 kg.

w <mark>→</mark> ×[500×600		
H \uparrow	Usable height mm	Cladding height mm	Art. no. 🞇
75	60	45	64.400.XXX
100	85	75	64.401.XXX
150	135	125	64.403.XXX
200	185	175	64.404.XXX
250	235	175	64.405.XXX



Shelf

Galvanised and height adjustable. Shelf thickness 25 mm, load capacity 25 kg.

W→	D 7	ArtNr.
600	600	64.413.000



Hinged door

Model: 1-wing.

H	W→	Model	Art. no. 🞇
500	600	left/right	64.410.XXX
350	600	right	64.411.XXX
350	600	left	64.412.XXX

Ordering information see p. 155





System workbench substructure

Workbench base substructures with friction-locking plug and screw-type connection. External and internal panels with slotted perforations. For plugging in workbench installations. With central locking but without cylinder (must be ordered separately). Colour: Pale grey, RAL 7035.







W→ for top width mm	1250	1500	2000
Base	Art. no.	Art. no.	Art. no.
stationary	41.957.020	41.957.020	41.956.020
mobile*	41.958.020	-	_
housing (W × D mm)	1164×600	1164×600	1654×600
Clear height (mm)	600	600	600
Number of compartments	2	2	3
+ KEY lock separately lockable	41.603.000	41.603.000	41.603.000
Number of locks required	1	1	2

^{*}Equipment: 1 push handle, 4 castor supports with 2 block and 2 swivel castors with brakes (solid rubber Ø 100 mm)



Multiplex tops

Beechwood top glued in multiple layers, sanded and surface-treated, bevelled top edges.

Thickness 40 mm

88.613.000

88.614.000

88.615.000



Drawers

With ball bearing, inc. guide rails. The drawer walls have a slotted grid on all sides on the inside. The fronts are equipped with continuous handles with integrated label strips and transparent covers.

W)	× D 7 Usal	ble surface mm	459×510	459×510
H	Usable height mm	Cladding height mm	Art. no. 🐫	Art. no. 🞇
75	60	50	41.598.XXX	41.725.XXX
100	90	75	41.599.XXX	41.726.XXX
150	140	125	41.600.XXX	41.727.XXX
200	190	125	41.601.XXX	41.728.XXX
300	290	125	41.602.XXX	41.729.XXX
Model			stationary	mobile
Load capa	acity		50 kg	30 kg



Hinged doors

Sheet steel door with plastic recessed grip. Optionally mounted on the right or left.

H 1	Model	Art. no. 🞇
450	left	41.583.XXX
450	right	41.584.XXX
600	left	41.585.XXX
600	right	41.586.XXX



Shelves

Shelves adjustable on a 25:25 mm grid, optionally as open compartments or behind a hinged door. Incl. shelf support. Shelf thickness 25 mm. Model: Sheet steel. Colour: Galvanised.

	Art. no.
Shelf	41.587.000
Usable dimensions (W × D)	493 × 539 mm

Ordering information

When selecting drawers and hinged doors, the clear height of the base is decisive. The sum of the drawer front heights (C) must be equal to the clear height (B).

Compact workbenches



System workbenches





Assembly trolleys





Xeyhole hook see p. 163

Storage container see p. 162





Easy assembly

- swivel and adjustable shelves and container strips can be attached to the support pillar without the use of tools
- ribbed mats and raised sides provide the required stability for the stored items

Diameter

mm



Ergonomic handling

· with four swivel castors and push handle

Art. no.

two locking mechanisms for fixing

1 Mobile assembly stand

The assembly trolleys can have elements attached on both sides. The support pillars enable rear panels, swivel shelves or adjustable shelves as well as container strips to be mounted without the use of screws. The assembly trolleys are equipped with 4 swivel castors, 2 of which have braking mechanisms. Wheel diameter 100 mm, rubber, grey, max. load capacity 250 kg. Specification: Assembly stand comprising crossbars, shelves and support pillars, made of steel profile, perforated on four sides at 50 mm increments. Colour: as per colour chart. Roller housing made of galvanised and chrome-plated sheet steel.

2 Push handle for assembly trolley

The push handle is fixed to the side of the support pillar of the assembly stand; includes fastening material. Specification: aluminium tubing, black, anodised, with plastic holder. Colour: black, RAL 9005.

3 Ribbed mat, double-sided

Specification: rubber, colour: grey.

4 Perforated rear panels

The support pillars can be vertically fitted with rear panels, either partially or up to their full height. All rear panels can be attached to the support pillars without screws. Rear panels perforated with square holes 10 × 10 mm, 38 mm division and slots 380 mm apart for accommodating storage shelves and can holders (see page 141). Specification: sheet steel. Colour: as per colour chart.

5 Container strips

To hold size 2, 3 and 4 storage containers; can be attached to the support pillars without screws. Max. load capacity 15 kg Specification: sheet steel. Colour: as per colour chart.

6 Safety bracket for container strips for assembly trolley

Safety bracket for container strips. For retrofitting. Is attached to the container strip to prevent any open-ended containers detaching from the container fixing strip in case of uneven flooring. Fastening material included. Specification: sheet steel. Colour: as per colour chart.

7 Adjustable shelves, plain, with side panel for assembly trolley

The raised sides prevent the transported goods slipping out in case of uneven floors. The adjustable shelves can be attached with the stop bar on either the front or the rear. Using two brackets, the adjustable shelves are attached to the support pillars without screws, either horizontally or with an inclination angle of 15°. Load capacity 50 kg. Normal level 25 mm + 17 mm stop bar. Including two brackets and a safety catch each. Specification: sheet steel. Colour: as per colour chart.

W for module	width mm			665	1330
Assembly	Width mm	Depth mm	Usable height mm	Art. no. 🛚 👯	Art. no. 🞇
double-sided	715	710	1250	89.938.XXX	-
double-sided	1380	710	1250	-	89.941.XXX

Art. no.

500	2	20	89.950.000	89.950.000
Usable width mm	Usable depth mm	Nominal depth mm	Art. no.	Art. no.
714	695	710	89.946.000	-
1379	695	710	-	89.949.000
Specification	Height mm	Usable width mm	Art. no. 🛚 👯	Art. no. 🞇
perforated	350	655	89.037.XXX	-
perforated	350	1320	-	89.040.XXX

Height mm	Usable width mm	Art. no.			Art. no.		
85	660	65.234	XXX.		-		
85	1325	-			65.235	.XXX	
Container size		2	3	4	2	3	4
Number of containers		6-12	6	4	12-24	12	8
85	660	65.087	.xxx		-		
85	1325	-			65.089	.XXX	

Safety catch (per pa	air)		90.360.000	90.360.000
plain	300	1329	-	89.871.XXX
plain	300	664	89.870.XXX	-
Specification	Depth mm	Usable width mm	Art. no. 🞇	Art. no. 🛚 👯



Height

mm

Safety instructions


Due to a risk of toppling, only adjustable shelves with a maximum depth of 300 mm or swivelling shelves may be used.



Test and inspection workstations





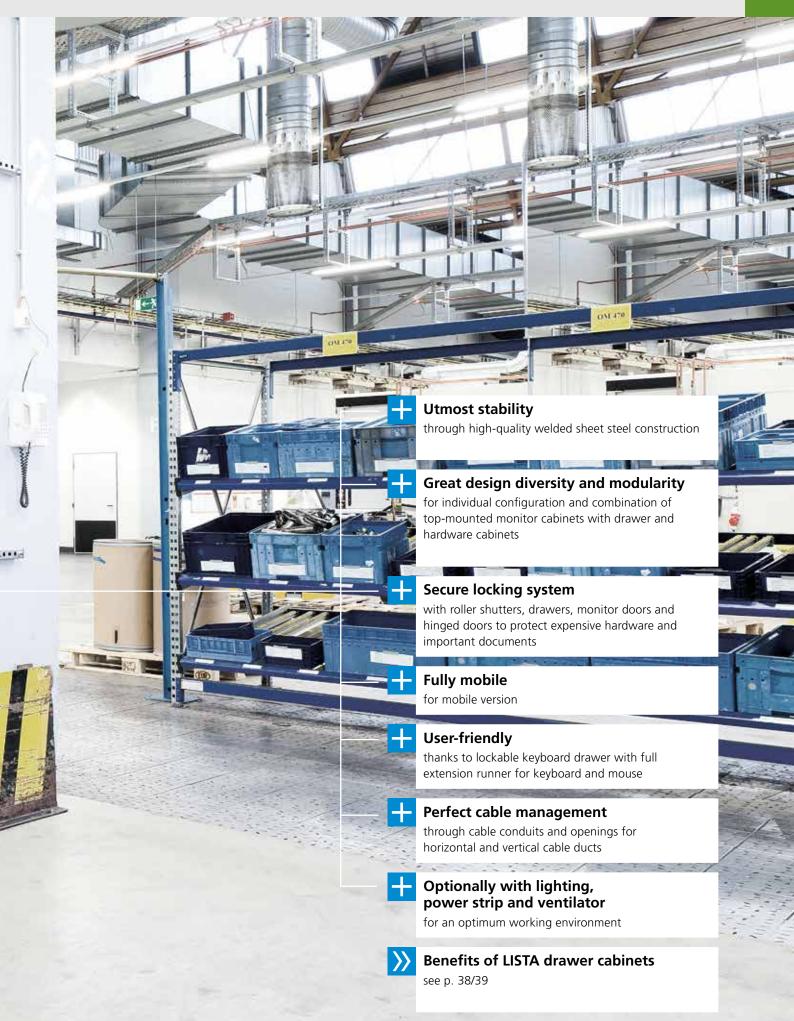

Test and inspection workstations | preconfigured



Computer cabinet

- 1 Monitor stand
- 2 Hardware cabinet
- Pair of castor holders





36×36 E









W	717 mm D	725 mm	
Η <u>↑</u>	Specification/type	Working height mm	Art. no. 👋
1625	without power strip	880	17.640.XXX
1625	CH	880	17.641.XXX
1625	D / PE	880	17.642.XXX
1625	F	880	17.643.XXX
1625	GB	880	17.644.XXX
1762	without power strip	1020	17.645.XXX
1762	CH	1020	17.646.XXX
1762	D / PE	1020	17.647.XXX
1762	F	1020	17.648.XXX
1762	GB	1020	17.649.XXX
1800	without power strip	1000	17.610.XXX
1800	CH	1000	17.611.XXX
1800	D / PE	1000	17.612.XXX
1800	F	1000	17.613.XXX
1800	GB	1000	17.614.XXX
1937	without power strip	1140	17.615.XXX
1937	CH	1140	17.616.XXX
1937	D / PE	1140	17.617.XXX
1937	F	1140	17.618.XXX
1937	GB	1140	17.619.XXX

D -> 717 mm	11 7 250	000	
717 mm	H 7 350 mm W	800 mm	
	Monitor stand	Doors mounted	Art. no. 🞇
	Full glass doors made from safety glass. Punch-outs for cable routing	right	69.885.XXX
	KEY lock individually lockable	left	69.886.XXX
Accessories	Model		Art. no. 🐫
Cover flap set	$1 \times$ cable collar, $2 \times$ cover flap		69.869.000
Adjustable shelf	smooth, load capacity 40 kg, adjustn	nent grid 25 mm	69.889.XXX

Computer cabinets

Computers and the corresponding hardware and software must be protected from dust, dirt and unauthorised access on the shop floor. The LISTA computer cabinet provides a safe and proven solution that fulfils this requirement. Equipped with:

- 1 monitor compartment with retracting door or hinged door mounted on the right, each with cylinder lock,
- 1 plain adjustable shelf in the monitor compartment with retracting door,
- 1 lockable 75 mm keyboard drawer with full extension runner,
- 1 hardware cabinet with hinged doors including lock, permanently installed power supply consisting of a 4-socket power strip (230 V) with illuminated switch, equipment extension, plain adjustable shelf,
- 1 built-in fan,
- 1 connecting cable, 5 m long,
- 1 opening in the rear panel, with removable cover
- 1 push rod (for mobile version)

Computer cabinets with retracting doors

Stationary and mobile version: with mobile versions, nylon castors, Ø 100 mm, monitor door can be swung upward, monitor compartment usable dimensions (W \times D \times H): $650 \times 620 \times 605$ mm, size of viewing window (W \times H): 445×525 mm

Computer cabinets with hinged door mounted on the right

Stationary and mobile version:

- with mobile versions, nylon castors, Ø 100 mm
- Monitor door mounted on the right
- monitor compartment usable dimensions / monitor stand (W × D × H): 710 × 325 × 730 mm
- size of viewing window (W × H): 653.5 × 721 mm



Computer cabinets

Computer cabinets protect electronic equipment in dusty and dirty surroundings. A central power input facilitates power supply to the hardware.



Quality Station

- 1 Quality cabinet
- Hard laminate top
- Hardware cabinet 3
- 4 Drawer cabinet
- Support bases with privacy screen

*excluding adjustable shelf Art. no. 16.808.000

Art. no. 17.826.020 Light grey, RAL 7035.





W → 1434 mm





suitable partition material for drawers see page 248











Η <mark>↑</mark>	Specification/type	Working height mm	of drawers mm	Equipment extension	Art. no. 🛚 👯
1900	without power strip, without lamp	750	-	1	17.800.XXX
1900	СН	750	-	1	17.801.XXX
1900	D / PE	750	-	1	17.802.XXX

1900	F	750	-	1	17.803.XXX
1900	GB	750	-	1	17.804.XXX
1900	without power strip, without lamp	750	2×300	-	17.805.XXX
1900	CH	750	2×300	-	17.806.XXX
1900	D / PE	750	2×300	-	17.807.XXX
1900	F	750	2×300	-	17.808.XXX
1900	GB	750	2×300	_	17.809.XXX

2100	without lamp	950	-	1	17.820.XXX
2100	СН	950	-	1	17.821.XXX
2100	D / PE	950	-	1	17.822.XXX
2100	F	950	-	1	17.823.XXX
2100	GB	950	-	1	17.824.XXX

2100	without power strip, without lamp	950	1×100/2×300	1	17.825.XXX
2100	СН	950	1×100/2×300	1	17.826.XXX
2100	D / PE	950	1×100/2×300	1	17.827.XXX
2100	F	950	1×100 / 2×300	1	17.828.XXX
2100	GB	950	1×100 / 2×300	1	17.829.XXX

2200	without power strip, without lamp	1050	1×75	1	17.830.XXX
2200	CH	1050	1×75	1	17.831.XXX
2200	D / PE	1050	1×75	1	17.832.XXX
2200	F	1050	1×75	1	17.833.XXX
2200	GB	1050	1×75	1	17.834.XXX

Quality Stations

Specification depending on model with the following system modules:

Quality cabinet

With plastic roller shutters including cylinder lock, connection cable 3 m long, hard laminate top as working surface, fitted without tools, power supply with 2-socket and 3-socket power outlet and rocker switch for the lamp built into the housing cover

Hardware cabinet

With hinged doors including lock, permanently installed power supply consisting of a 4-socket power strip (230 V) with illuminated switch, equipment extension, connecting cable 5 m long, lockable 75 mm keyboard drawer with full extension runner

Drawer cabinet

With full extension runner, drawer load capacity 75 kg

Support base

With privacy screen




Mobility

All test and inspection workstations are also available in a mobile version. This allows you to quickly and efficiently adapt to changing requirements.



Storage containers and keyhole hooks not only keep workbenches and workstations neat and tidy, they also ensure that tools and accessories are neatly stored and always within reach on assembly trolleys and when they are used as accessories in full storage walls and shelving systems. You bet.

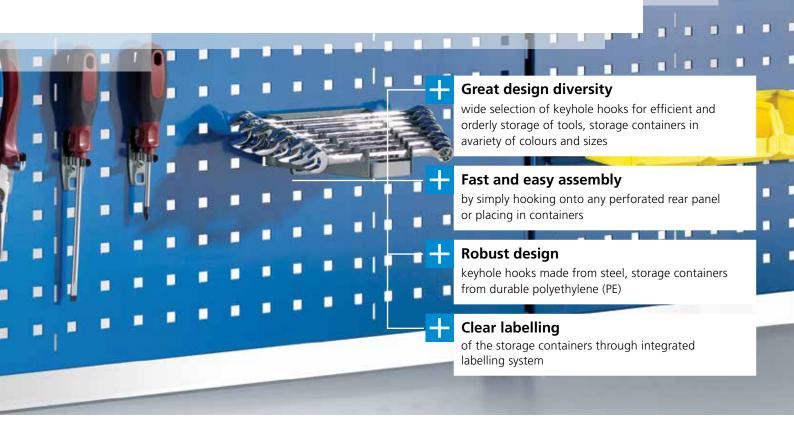


Storage container

Width, depth and height refer to the external dimensions. The storage containers are resistant to most oils, acids and alkalis, reduce noise when used on conveyors and when used properly are resistant to temperatures of -20°C to +100°C. Specification: polypropylene.

			-1			
	Size 2	Size 3	Size 4	Size 5Z	Size 5	Size 6
	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.
	83.100.000	83.105.000	83.110.000	83.115.000	83.119.000	83.123.000
	83.101.000	83.106.000	83.111.000	83.116.000	83.120.000	83.124.000
	83.102.000	83.107.000	83.112.000	83.117.000	83.121.000	83.125.000
	83.103.000	83.108.000	83.113.000	83.118.000	83.122.000	83.126.000
Dimensions $W \times D \times H mm$	101×90×50	103×164×75	149 × 231 × 125	210×329×150	210×343×198	311×492×199
Content dm³	0.3	0.9	2.7	7.5	10.4	23.5
Paper labels, white	83.127.000	83.129.000	83.131.000	83.131.000	83.131.000	83.131.000
Number	10	10	10	10	10	10
Transparent sheet	83.128.000	83.130.000	83.132.000	83.132.000	83.132.000	83.132.000
Number	10	10	10	10	10	10

162 www.lista.com





Keyhole hook sets

40-piece	45.273.000	
28-piece	45.272.000	
18-piece	45.271.000	
12-piece	45.270.000	
Specification	Art. no.	



Tool holder, inclined

Sold in packs of 5

Length mm	Art. no.
50	45.274.000
100	45.275.000
150	45.276.000

Sold in packs of 5



Tool holder, inclined, double

Length mm	Art. no.
35	45.301.000
50	45.302.000
75	45.303.000



Magnetic holder

35 44.345.000	Ømm	Art. no.
	35	44.345.000

Sold in packs of 5



Inclined hook

Length mm	Art. no.
14/40	45.277.000

Sold in packs of 5



Tool holder, vertical

Specification	Length mm	Art. no.
single	35	45.278.000
single	75	45.279.000
single	125	45.280.000

Sold in packs of 5



Tool holder, vertical

Specification	Length mm	Art. no.
double	35	45.281.000
double	50	45.282.000
double	75	45.283.000

Sold in packs of 5



Tool clamp

Ømm	Art. no.
6	45.284.000
10	45.285.000
13	45.286.000
16	45.287.000
19	45.288.000

Sold in packs of 5



Tool clamp, large base plate

Ømm	Art. no.
25	45.289.000
28	45.290.000
32	45.291.000

Sold in packs of 5



Pliers holder

Width mm	Art. no.
35	45.292.000
55	45.293.000
75	45.294.000


Sold in packs of 5



Cable holder


150	45.295.000
Specification	Art. no.

Sold in packs of 5




Screwdriver holder

Specification	Art. no.	
for 6 parts	45.296.000	



Drill bit/Allen key holder

Specification	Art. no.	
for 14 parts	45.297.000	



Spanner holder

 Specification
•



Saw holder

Specification	Art. no.
for 4 saws	45.299.000

Sold in packs of 2



Machine holder


Ømm	Art. no.
40	45.300.000

Sold in packs of 5

Desk chairs



A good desk chair increases the efficiency of your company and ensures safety in the workplace

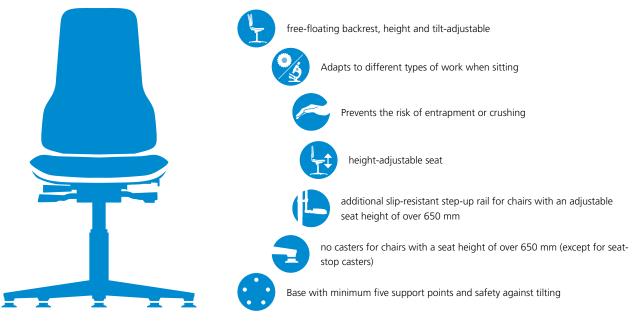

164 www.lista.com






Art. no. **69.505.000** with casters, made of integral form



Art. no. **69.500.000** with sliders, made of beech



Art. no. **69.509.000** with sliders and height-adjustable base ring, made of imitation leather

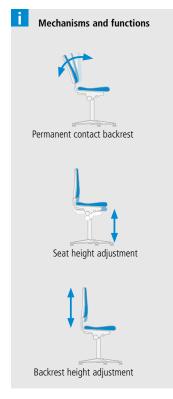

Swivel chair

Perfect entry-level model for correct posture in production. Low profile, sturdy five-star base made of plastic, in black, either with load-dependent braked casters for hard floors or abrasion-resistant floor sliders. Available in the following versions: laminated beech, black Imitation leather and black integral foam.

	Surface	Integral foam	Beech	Imitation leather
Base including cushion	Seat height mm	Art. no.	Art. no.	Art. no.
with casters	440-620	69.505.000	69.503.000	69.504.000
with sliders	440-620	69.502.000	69.500.000	69.501.000
With sliders and height-adjustable	580-850	69.510.000	69.508.000	69.509.000



Art. no. **69.514.000** with casters, made of integral foam



Art. no. **69.513.000** with sliders, made of integral foam




Art. no. **69.515.000** with sliders and height-adjustable base ring, made of integral foam


Swivel chair with Soft-Touch integral foam

Perfect industry chair providing optimum seating comfort thanks to the hard-wearing Soft-Touch integral foam.
Easy to clean and resistant to all disinfectants. Low profile, sturdy five-star base made of plastic, in black, either with load-dependent braked casters for hard floors or abrasion-resistant floor sliders.

	Surface	Integral foam	Beech	Imitation leather
Base including cushion	Seat height mm	Art. no.	Art. no.	Art. no.
with casters	430-600	69.514.000	-	-
with sliders	430-600	69.513.000	-	-
With sliders and height-adjustable base ring	580-850	69.515.000	<u>-</u>	-

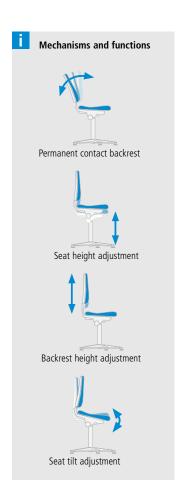





Desk chair, ergonomic and functional for modern industry. Innovative chair/cushion combination in 1+1 system for durability, flexibility and perfect adaptation to the respective working area. Flexband made of soft plastic protects the chair and surrounding area, colour "Ocean blue". Solid steel construction with aluminium star base (metal parts in black, plastic parts in basalt grey), either with load-dependent braked casters for hard floors or abrasion-resistant floor gliders.

Base excluding cushion	Seat height mm	Art. no.
with casters	450-620	69.518.000
with sliders	450-620	69.516.000
with gliders and footrest	590-870	69.520.000

Replacement cushions

A selection of cushion materials is available to suit a variety of applications: tough integral foam cushions capable of withstanding mechanical loads, soft and washable easy-care imitation leather, robust and breathable fabric cushions as well as the world first "Supertec" — an innovative cover material that combines the advantages of fabric and integral foam.



FabricBreathable, comfortable, soft, hard-wearing. Colour: black.

Art. no. 69.522.000




Imitation leatherWashable, easy-care, resistant to oils and disinfectants, soft and comfortable.
Colour: black.

Art. no. **69.523.000**



Integral foam Robust, durable, washable, resistant to flying sparks and weak acids and alkalis. Colour: black.

Art. no. **69.524.000**

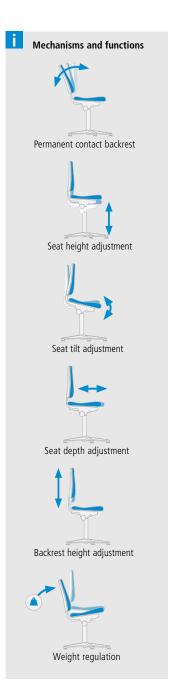



SupertecComfortable, soft, breathable, extremely hard-wearing, cut-resistant, non-slip, easy to clean. Colour: black.

Art. no. **69.525.000**










Swivel stool

Tough stool with extra large seat measuring 40 cm in diameter, ideal for trade and industry. The all-round cushion edge protection and sturdy steel star base guarantee a long lifetime. A practical gas spring release ring ensures convenient height adjustment. Sturdy five-star base made of steel in black. With load-dependent braked casters. Available in the following versions: black imitation leather, black integral foam and beech laminated wood.

	Surface	Integral foam	Beech	Imitation leather
Base including cushion	Seat height mm	Art. no.	Art. no.	Art. no.
with casters	460-630	69.531.000	69.529.000	69.530.000










Sitting/standing seat

Best support for sitting, standing and multi-purpose workstations. Secure seating thanks to ergonomic backrest and slip-resistant Wave seat. Extremely wear-resistant, soft cushion and good ventilation. Sturdy five-star base made of plastic in black. With optional load-dependent braked casters for hard floors or abrasion-resistant floor gliders, seat height adjustment and 360° rotatable seat.

	Surface	Integral foam	Beech	Imitation leather
Base including cushion	Seat height mm	Art. no.	Art. no.	Art. no.
with casters	430-600	69.532.000	-	-
with sliders	430-600	69.533.000	-	-
With sliders and height-adjustable base ring	510-780	69.534.000	-	-




Stand-up seat

Fascinating solution for virtually all kinds of standing work. Seat consists of hard-wearing and nonslip soft-touch PU foam (colour black), integrated comfort handles, extra wide comfortable seat, continuous seat height adjustment, seat rotatable 20° to the left and right, sturdy base with brilliant silver coated aluminium surface.

	Surface	Integral foam
Base including cushion	Seat height mm	Art. no.
with base	620-850	69.535.000





THE PERFECT COMPLEMENT

The extensive range of LISTA cabinets enables you to customise and add to your workspace and storage equipment. The high-quality steel cabinets can be easily integrated into a variety of working environments and individually adapted to your specific requirements. They are suitable both for industrial purposes and for storing files and similar items in offices and administrative departments. And of course your personal belongings are always kept safe in a LISTA cabinet.





The right solution for every need




Hinged door cabinets see p. 170



Sliding-door cabinets see p. 178



Wall-mounted cabinets with hinged or sliding doors see p. 184



Wall-mounted cabinets with roller shutter see p. 186



Roller shutter cabinets see p. 188



Vertical pull-out cabinets see p. 190



Heavy-duty cabinets see p. 192



Clothing lockers see p. 196



Compartment cabinets



Battery charging cabinets see p. 204



Laptop cabinets and battery charging cabinets for electric scooters



Battery charging cabinets as an e-bike charging station

see p. 214



Environmental and oil cabinets

see p. 216



Containers and large-scale pin cabinets*




Firefighter lockers*




Office cabinets*

Cabinet systems | Hinged door cabinets

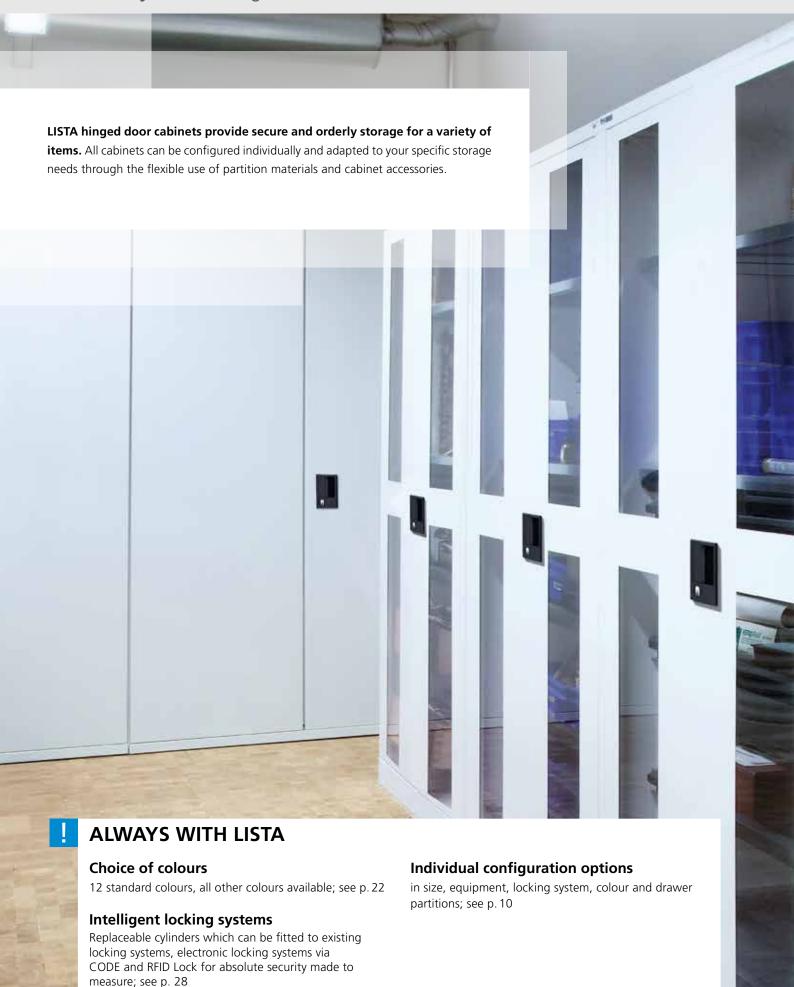



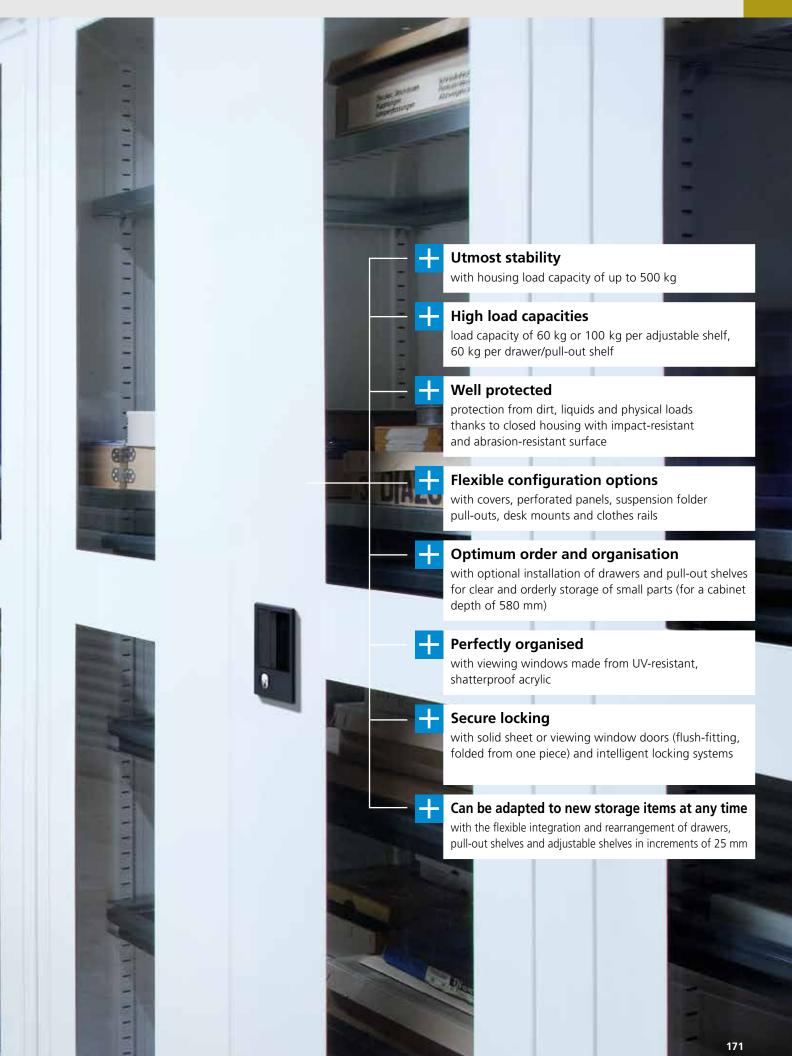

Cabinet systems I Hinged door cabinets

Hinged door cabinets

Depending on the model, the cabinets on these two pages are equipped with: adjustable shelves, galvanised, 30 mm thick, load capacity 60 kg. Pull-out shelves and drawers, painted, anthracite grey, RAL 7016, load capacity 60 kg. Note: Cabinets with drawers and pull-out shelves come with floor anchoring as anti-tilting device.





Art. no. **62.203.030.C** Reseda green, RAL 6011














W <mark>→</mark>	D 7	Adjustable shelves	Drawers	Pull-out shelves	kg	Hinge pins mounted	6	Art. no. 🞇	
Cabir	ets wit	h 1 solid s	heet doo	r					
500	400	1	-	-	60	Hinge	KEY Lock	62.150.XXX	
500	500	1	-	-	60	Hinge	KEY Lock	62.151.XXX	
500	580*	1	-	-	60	Hinge	KEY Lock	58.280.XXX	
500	400	2	-	-	60	Hinge	KEY Lock	62.152.XXX	
500	500	2	-	-	60	Hinge	KEY Lock	62.153.XXX	
500	580*	2	-	-	60	Hinge	KEY Lock	58.283.XXX	
500	580*	2	1×95	-	50/60	Hinge	KEY Lock	58.652.XXX	



1000	400	2	-	-	60	Hinge	KEY Lock	60.460.XXX	
1000	500	2	-	-	60	Hinge	KEY Lock	60.461.XXX	
1000	580*	2	-	-	60	Hinge	KEY Lock	58.656.XXX	
1000	580*	2	1 ~ 05	_	50/60	Hinga	KEV Lock	58 658 YYY	



Hinged

- for the installation of drawers and pull-out shelves, doors must be fitted
- doors are flush with the cabinet housing
- opening angle approx. 115°



Perfect storage

All hinged door cabinet drawers can be fitted individually with LISTA partition material to ensure the correct storage of small parts within the drawers.





VV Z	<i>D</i>	shelves	Diaweis	shelves	(Kg)	mounted		Art. 110.	
Cabir	ets wit	h 2 solid s	heet doo	rs					
750	500	4	=	=	60	Hinge	KEY Lock	62.155.XXX	
750	580*	4	-	-	60	Hinge	KEY Lock	62.156.XXX	

Dull-out

When ordering a cabinet from these two pages with CODE or RFID Lock, please add the suffix "C" or "F", respectively, to the article number stated in the table (e.g. **62.201.XXX.C**).







MA Da Adjustable Drawers

ELISTA





H 1950 mm





W->	D 7	Adjustable shelves	Drawers	Pull-out shelves	kg	Hinge pins mounted	6	Art. no.	
Cabin	ets wit	h 2 solid s	heet doo	rs					
1000	400	4	-	-	60	Hinge	KEY Lock	60.418.XXX	
1000	500	4	-	-	60	Hinge	KEY Lock	60.419.XXX	
1000	580*	4	-	-	60	Hinge	KEY Lock	58.617.XXX	
1250	400	4	-	_	60	Hinge	KEY Lock	60.420.XXX	
1250	500	4	-	-	60	Hinge	KEY Lock	60.421.XXX	
1250	580*	4	-	-	60	Hinge	KEY Lock	60.471.XXX	
1000	580*	2	3×95	2	50/60	Hinge	KEY Lock	58.665.XXX	
1000	580*	2	-	4	50/60	Hinge	KEY Lock	58.662.XXX	



Individual arrangements


- with adjustable shelves, drawers and pull-out shelves
- covers, perforated panels, suspension folder pull-outs, desk mounts and clothes rails are available as optional extras



Hinged doors with viewing windows

- for greater transparency of stored items
- encourages order



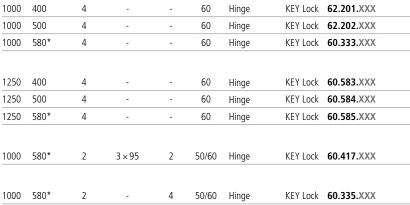

^{*} Retrofitting with drawers and pull-out shelves possible.



Cabinet systems I Hinged door cabinets







H 1950 mm, with partition



W <mark>→</mark>	D 7	Adjustable shelves	Drawers	Pull-out shelves	kg	Hinge pins mounted	â	Art. no.	
Cabin	ets wit	h 2 solid s	heet doo	rs and pa	rtition				





Cabinets with 2 viewing window doors and partition

1000	500	10	-	-	60	Hinge	KEY Lock	60.621.XXX	
1000	580*	10	-	-	60	Hinge	KEY Lock	60.622.XXX	
1000	580*	6	6 × 95	2	50/60	Hingo	KEV Lock	60 602 XXX	

^{*} Retrofitting with drawers and pull-out shelves possible.



Perfect storage

All hinged door cabinet drawers can be fitted individually with LISTA partition material to ensure the correct storage of small parts within the drawers.

1950 mm, with partition and clothes storage

1000



W → D 7 Clothes storage equipment

Hinge pins mounted

Art. no.



Cabinets with 2 solid sheet doors, partition and clothes storage

1 adjustable shelf usable width 982 mm, 3 adjustable shelves 500

usable width 481 mm, 1 clothes rail with 3 plastic hooks

Hinge

KEY Lock 60.472.XXX



Cabinets with 2 viewing window doors, partition and clothes storage

1 adjustable shelf usable width 982 mm, 3 adjustable shelves

1000 500 usable width 481 mm, 1 clothes rail with 3 plastic hooks

KEY Lock 60.611.XXX

When ordering a cabinet from these two pages with CODE or RFID Lock, please add the suffix "C" or "F", respectively, to the article number stated in the table (e.g. **62.201.XXX.C**).











Slotted adjustable shelves

Adjustable shelves including 4 shelf supports. Specification: steel sheet, galvanised, slotted. Long sides folded by $4 \times 90^\circ$. 30 mm thick with load-bearing capacity of 60 or 100 kg.



Dividers for adjustable shelves

For subdividing adjustable shelves. Specification: steel sheet, painted. Colour: light grey, RAL 7035.



Drawers and pull-out

Full extension with ball bearings, including guide rails. Load capacity 60 kg. Specification: steel sheet. Colour: anthracite grey, RAL 7016. Only compatible with cabinets with hinges and a depth of 580 mm.



Robust steel tubing construction 40 × 40 mm, , closed side panels, incl. fastening material (screw connection between cabinet and base). Optional: base cover to be attached as a cover on the front or rear. Colour: Anthracite grey, RAL 7016.

Please contact us for the complete range of accessories.

W -> For cabinet v	width mm		500	750	1000	1000	1250
						with central partition	
D 7 For cabinet depth	mm	Load capacity kg	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.
Adjustable shelf							
400		60	58.100.000	58.103.000	58.106.000	58.100.000	58.109.000
400		100	<u>-</u>	<u>-</u>	60.487.000	<u>-</u>	60.488.000
500		60	58.101.000	58.104.000	58.107.000	58.101.000	58.110.000
500		100	-	-	60.407.000	-	60.408.000
580		60	58.102.000	58.105.000	58.108.000	58.102.000	58.111.000
580		100	-	-	60.409.000	-	60.434.000
		Usable dimensions (W × D mm)	480×326/426/506	730×326/426/506	980×326/426/506	480×326/426/506	1230×326/426/506
Divider for adjustable	shelf						
400 L 311×H 150 mm			58.144.000	58.144.000	58.144.000	58.144.000	58.144.000
500		L 411×H 150 mm	58.145.000	58.145.000	58.145.000	58.145.000	58.145.000
580		L 490×H 150 mm	58.146.000	58.146.000	58.146.000	58.146.000	58.146.000
Drawer	Η <mark>↑</mark>	Usable height mm					
580	95	72	62.141.000	62.308.000	58.113.000	62.141.000	57.481.000
580	145	122		-	57.471.000	-	57.482.000
		Usable dimensions (W × D mm)	357×459	617×459	867×459	357×459	1117×459
Pull-out shelf	Н↑	Usable height mm					
580	53	43	62.142.000	_	58.115.000	62.142.000	_
	33	Usable dimensions (W × D mm)	357×459		867×459	357 × 459	
D*							
Base*	H 1			07.044.005	00.540.005	00.540.000	00.050.000
500	150			97.844.000	98.518.000	98.518.000	98.253.000
580	150		<u>-</u>	98.657.000	98.216.000	98.216.000	97.835.000
Base cover, , H 150 mm	n		-	57.238.000	97.986.000	97.986.000	62.806.000

Screw connections

Hinged door cabinets (for housing height 1000 mm) are designed to allow a second cabinet to be screwed on (one on top of the other).

98.501.000



Partition material sets for drawers







Slotted dividers and metal separators

Siottea aiviacis ai	na metar separate
For front height mm	Art. no.
95	62.159.000
1 slotted partition:	21 E on one side
2 slotted dividers:	27 E
3 metal separators:	7 E



Slotted dividers and metal separators

For front height mm	Art. no.				
95	62.160.000				
1 slotted partition:	21 E on one side				
3 slotted dividers:	27 E				
3 metal separators:	5 E				
1 metal separator:	6 E				



Plastic boxes

For front height mm	Art. no.
95	62.161.000
3 plastic boxes:	150×150×71 mm
6 plastic boxes:	$150 \times 75 \times 71 \text{ mm}$
1 spacer angle	







For front height mm

1 slotted partition:

5 slotted dividers: 6 metal separators:

95

145

Slotted dividers and metal separators

Art. no.

58.477.000

61.163.000

51 E on one side

4×8 E, 1×9 E, 1×10 E



Slotted dividers and metal separators

For front height mm	Art. no.			
95	58.478.000			
145	61.164.000			
1 slotted partition:	51 E on one side			
7 slotted dividers:	27 E			
8 metal separators:	7×6 E, 1×9 E			



Plastic boxes

For front height mm	Art. no.
95	58.491.000
10 plastic boxes:	150×150×71 mm
13 plastic boxes:	$150 \times 75 \times 71 \text{ mm}$
1 spacer angle	









Slotted dividers and metal separators

Siotted dividers at	iu ilietai separato
For front height mm	Art. no.
95	61.165.000
145	61.186.000
1 slotted partition:	65 E on one side
6 slotted dividers:	27 E
7 metal separators:	6×9 E, 1×10 E



Slotted dividers and metal separators

For front height mm	Art. no.			
95	61.166.000			
145	61.187.000			
1 slotted partition: 8 slotted dividers: 9 metal separators:	65 E on one side 27 E 8×7 E, 1×9 E			





Note: the front height corresponds to the drawer front height. For the actual height of the partition material see p. 262 – 265. Partition material sets excluding clip-on label holder.





Cabinet housing

The housings of the hinged door cabinets are made from high-quality sheet steel and are available with specifica-tions for one or two hinged doors, with or without a fixed partition. The inside fittings of the cabinet are easy to customize thanks to the 25:25 mm divisions.



Hinged doors

The hinged doors in solid sheet or with a viewing window are folded from one piece, flush-fitting and flush with the cabinet housing. The doors can be equipped with hinges, with an opening angle of approx. 115°. The hinged doors can be equipped with a KEY Lock, a CODE Lock or an RFID Lock as desired.

For cabinet width mm			500	750	1000	1000	1250
Cabinet housing					with central partition		
H 1	Clear height	D 7	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
1000	885	400	57.600.XXX	-	57.612.XXX	-	-
		500	57.601.XXX	-	57.613.XXX	-	-
		580	57.602.XXX	-	57.614.XXX	58.431.XXX	-
1950	1835	400	-	57.609.XXX	57.618.XXX	-	57.627.XXX
		500	-	57.693.XXX	57.619.XXX	-	57.628.XXX
		580	-	57.611.XXX	57.620.XXX	58.433.XXX	57.629.XXX
linged doo	rs excl. clasp lock						
linged doo	rs excl. clasp lock						
-	rs excl. clasp lock Door design		Art. no. 👋	Art. no. 💨	Art. no. 💨	Art. no. 🖑	Art. no. 🞇
Η <mark>↑</mark>	•		Art. no. 👋 62.003 .XXX	Art. no. 🐫	Art. no. 🐫 62.009 .XXX	Art. no. ╬ 62.009 .XXX	Art. no. 🎇
Н↑	Door design		***	Art. no. 💨	446	485	Art. no. *
H 1000	Door design Solid sheet		62.003.XXX	Art. no. % 62.006.XXX	62.009.XXX	62.009.XXX	Art. no. *** 62.016.XXX
H 1000	Door design Solid sheet Viewing window		62.003.XXX 62.307.XXX	- -	62.009.XXX 62.137.XXX	62.009.XXX 62.137.XXX	- - -
1000 1950	Door design Solid sheet Viewing window Solid sheet Viewing window		62.003.XXX 62.307.XXX	- -	62.009.XXX 62.137.XXX 62.011.XXX	62.009.XXX 62.137.XXX 62.011.XXX	- 62.016.XXX
1000 1950 - clasp lock	Door design Solid sheet Viewing window Solid sheet Viewing window		62.003.XXX 62.307.XXX	- -	62.009.XXX 62.137.XXX 62.011.XXX	62.009.XXX 62.137.XXX 62.011.XXX	- 62.016.XXX
1000 1950 + clasp lock	Door design Solid sheet Viewing window Solid sheet Viewing window		62.003.XXX 62.307.XXX	- - 62.006.XXX	62.009.XXX 62.137.XXX 62.011.XXX 62.012.XXX	62.009.XXX 62.137.XXX 62.011.XXX 62.012.XXX	62.016.XXX 62.017.XXX



Clasp locks

The standard KEY Lock locking system with replaceable cylinders makes it easy to adapt to existing locking systems. With CODE Lock, the key is replaced by a simple numeric combination. The LISTA RFID Lock enables automatic and contactless locking through radio frequency identification.





Cabinet systems | Sliding-door cabinets







Cabinet systems I Sliding-door cabinets with solid sheet doors







W→	D 7	Adjustable shelves	Drawers	Pull-out shelves	kg		Art. no. 🞇		
Cabinets with 2 solid sheet doors									
1000	400	2	-	-	60	KEY Lock	58.747.XXX		
1000	500	2	-	-	60	KEY Lock	58.756.XXX		
1000	580	2	-	-	60	KEY Lock	58.757.XXX		
1250	400	2	-	-	60	KEY Lock	58.758.XXX		
1250	500	2	-	-	60	KEY Lock	58.759.XXX		

60

KEY Lock

KEY Lock

KEY Lock

KEY Lock

58.760.XXX

58.761.XXX

58.762.XXX

58.763.XXX

*Retrofitting with drawers and pull-out shelves possible.



Art. no. 58.757.060 Black, NCS S 9000-N



1500 400 1500 500 4 60 1500 580* 4 60

Cabinets with 2 solid sheet doors and partition



180

2000	400	4	-	-	60	KEY Lock	58.796.XXX
2000	500	4	-	-	60	KEY Lock	58.764.XXX
2000	580*	4	-	-	60	KEY Lock	58.765.XXX
2000	580*	2	2×95	4	50/60	KEY Lock	58.745.XXX



Sliding-door cabinets Depending on the model, the cabinets on these two pages are fitted with: adjustable shelves, galvanised, 30 mm thick, load capacity 60 kg, pull-out shelves and drawers, painted, anthracite grey, RAL 7016, load capacity 50 kg

1250 580







Art. no. **58.750.020** Light grey, RAL 7035











W→	DM	Adjustable shelves	Drawers	Pull-out shelves	kg		Art. no. 🞇	
Cabin	ets wit	h 2 solid s	heet doo	ors				
1000	400	4	-	-	60	KEY Lock	58.748.XXX	
1000	500	4	-	-	60	KEY Lock	58.749.XXX	
1000	580	4	-	-	60	KEY Lock	58.750.XXX	
1250	400	4	-	-	60	KEY Lock	58.777.XXX	
1250	500	4	-	-	60	KEY Lock	58.778.XXX	
1250	580	4	-	-	60	KEY Lock	58.779.XXX	

Cabi	nets with	2 solid	sheet doo	rs and p	partition		
1000	580*	8	-	-	60	KEY Lock	58.751.XXX
1500	400	8	-	-	60	KEY Lock	58.780.XXX
1500	500	8	-	-	60	KEY Lock	58.781.XXX
1500	580*	8	-	-	60	KEY Lock	58.782.XXX
2000	400	8	-	-	60	KEY Lock	58.783.XXX
2000	500	8	-	-	60	KEY Lock	58.784.XXX
2000	580*	8	-	-	60	KEY Lock	58.754.XXX
2000	580*	4	-	4	50/60	KEY Lock	58.755.XXX



Lock-down cylinder lock / KEY Lock

The doors cannot be prised out thanks to the right-angled bar used in the locking system.



Extremely smooth runningThe ball bearing rollers of the sliding doors run quietly on the guide rails.



Cabinet systems I Sliding-door cabinets with viewing window doors



H 1000 mm







2000

2000

580*

580*

2

2×95

1500	400	4	-	-	60	KEY Lock	60.715.XXX
1500	500	4	-	-	60	KEY Lock	60.716.XXX
1500	580*	4	-	-	60	KEY Lock	60.717.XXX
2000	400	4	-	-	60	KEY Lock	60.721.XXX
2000	500	4	-	-	60	KEY Lock	60.722.XXX

60

50/60

KEY Lock

KEY Lock

60.723.XXX

60.725.XXX



Sliding doors with viewing windows The UV-resistant acrylic glass is shatterproof and enables clear

organisation at the workstation.

H 1950 mm





D 7	Adjustable shelves	Drawers	Pull-out shelves	kg	•	Art. no. 🞇
ets wit	h 2 viewir	ng windo	w doors	and par	tition	
400	8	-	-	60	KEY Lock	60.718.XXX
500	8	-	-	60	KEY Lock	60.719.XXX
580	8	-	-	60	KEY Lock	60.720.XXX
400	8	-	-	60	KEY Lock	60.726.XXX
500	8	-	-	60	KEY Lock	60.727.XXX
580*	8	-	-	60	KEY Lock	60.728.XXX
580*	4	-	4	50/60	KEY Lock	60.729.XXX
	400 500 580 400 500 580*	shelves nets with 2 viewin 400 8 500 8 400 8 500 8 500 8	shelves nets with 2 viewing windo 400 8 - 500 8 - 400 8 - 400 8 - 500 8 - 500 8 -	shelves shelves nets with 2 viewing window doors 400 8 - - 500 8 - - 580 8 - - 400 8 - - 500 8 - - 580* 8 - -	shelves shelves nets with 2 viewing window doors and part 400 8 - - 60 500 8 - - 60 580 8 - - 60 400 8 - - 60 500 8 - - 60 580* 8 - - 60	shelves shelves nets with 2 viewing window doors and partition 400 8 - - 60 KEY Lock 500 8 - - 60 KEY Lock 580 8 - - 60 KEY Lock 400 8 - - 60 KEY Lock 500 8 - - 60 KEY Lock 580* 8 - - 60 KEY Lock



Sliding-door cabinets

Depending on the model, the cabinets on these two pages are fitted with: adjustable shelves, galvanised, 30 mm thick, load capacity 60 kg, pull-out shelves and drawers, painted, anthracite grey, RAL 7016, load capacity 50 kg





Slotted adjustable shelves

Adjustable shelves including 4 shelf supports. Specification: steel sheet, galvanised, slotted. Long sides folded by $4\times90^\circ$. 30 mm thick with load-bearing capacity of 60 or $100\,\mathrm{kg}$.



Dividers for adjustable shelves

For subdividing adjustable shelves. Specification: steel sheet, painted. Colour: light grey, RAL 7035.



Drawers and pull-out shelves

Full extension with ball bearings, including guide rails. Load capacity 50 kg. Specification: steel sheet. Colour: anthracite grey, RAL 7016. **For cabinet depth 580 mm.**



Base

Robust steel tubing construction 40 × 40 mm, closed side panels, incl. fastening material (screw connection between cabinet and base). Optional: base cover to be attached as a cover on the front or rear. Colour: Anthracite grey, RAL 7016.

For cabinet wid	th mm		1000	1000	1250	1500	2000
				with central partition		with central partition	with central partition
D 7 For cabinet depth mm	1	Load capacity kg	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.
Adjustable shelf							
400		60	58.106.000	58.100.000	58.109.000	58.103.000	58.106.000
400		100	60.487.000	-	60.488.000	-	60.487.000
500		60	58.107.000	58.101.000	58.110.000	58.104.000	58.107.000
500		100	60.407.000	-	60.408.000	-	60.407.000
580		60	58.108.000	58.102.000	58.111.000	58.105.000	58.108.000
580		100	60.409.000	-	60.434.000	-	60.409.000
		Usable dimensions (W×D mm)	980×326/426/506	480 × 326/426/506	1230×326/426/506	730 × 326/426/506	980 × 326/426/506
Divider for adjustable sh	elf						
400		L 311×H 150 mm	58.144.000	58.144.000	58.144.000	58.144.000	58.144.000
500		L 411×H 150 mm	58.145.000	58.145.000	58.145.000	58.145.000	58.145.000
580		L 490×H 150 mm	58.146.000	58.146.000	58.146.000	58.146.000	58.146.000
Drawer	Н↑	Usable height mm					
580	95	72	58.113.000	62.141.000	-	62.308.000	58.113.000
580	145	122	57.471.000	-	-	-	57.471.000
		Usable dimensions (W×D mm)	867×459	357×459		617×459	867×459
Pull-out shelf	Н↑	Usable height mm					
580	53	43	58.115.000	62.142.000	-	-	58.115.000
		Usable dimensions (W×D mm)	867×459	357×459			867×459
Base	Η <mark>↑</mark>						
500	150		98.518.000	98.518.000	98.253.000	57.277.000	97.103.000
580	150		98.216.000	98.216.000	97.835.000	97.457.000	97.133.000
D			07.000.000	22.000.000	62.006.006	F7 220 000	00 350 000
Base cover, H 150 mm			97.986.000	97.986.000	62.806.000	57.239.000	98.259.000







^{*} Floor anchoring may be required, depending on the version.

Cabinet systems | Wall-mounted cabinets with hinged or sliding doors



LISTA wall-mounted cabinets are perfect as additional storage space for small parts, documents and more. They keep your storage items ergonomically and conveniently stored at viewing height. Just mount them on the wall and in no time everything is just where it should be: neatly put away.







Art. no. 69.861.200 Wall-mounted cabinets with sliding doors, height 420 mm, RAL 7016



Wall-mounted cabinets

Flush-fitting hinged doors with reinforced edges for increased rigidity, with fulcrum pins, 110 ° opening angle. Sliding doors edged from one piece, low-noise ball-bearing-mounted sliding door guide. Housing incl. punch-outs for power supply to the cabinets. Adjustable shelving (adjustable grid 25 mm) cable compartments under each shelf are optionally available. Base height: 35 mm.

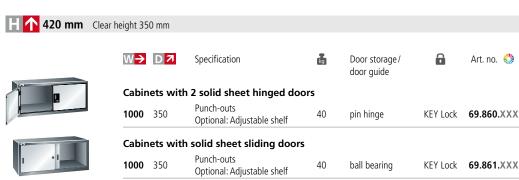

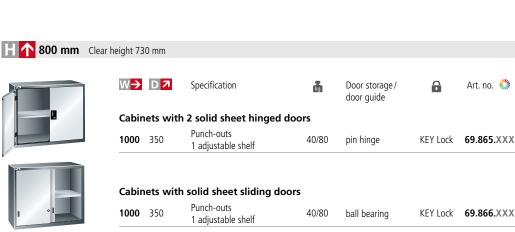



Adjustable shelf for wall-mounted cabinet

Width: 1000 mm. Load capacity: 40 kg.

Art. no. 69.883.XXX



Cover flap set

Custom-fit flap and cable collar for punch-outs. Delivery: 2 hinged flaps. 1 cable collar

Art. no. **69.869.000**





Clasp lock KEY Lock

- standard locking system for hinged doors with replaceable cylinders
- makes it easy to adapt to existing locking

Lock-down cylinder lock / **KEY Lock**

- locking system for sliding doors
- cannot be prised out thanks to the rightangled bar



Extremely smooth running

the ball bearing rollers of the sliding doors run quietly on the guide rails



Cable feed-through

- punch-outs allow the cabinet to be provided with a power supply, see p. 147
- punch-outs are present on the lid and base
- there is space for cable routing underneath the shelf

Cabinet systems | Wall-mounted shutter cabinets





Wall-mounted cabinet with aluminium roller shutters

This type of cabinet is ideal for securely hanging tools. The space-saving roller shutter winder gives a maximum usable depth of 215 mm and also allows the use of standard folders. In addition, this cabinet can optionally be equipped with an integrated cable conduit to accommodate the energy modules (see p. 145). For direct fastening to the worktop, this cabinet (1050 mm high) can also be ordered without a floor (see p. 121).



Art. no. 69.851.200 Wall-mounted cabinet with aluminium roller shutters, RAL 7016

Roller shutter cabinet

Aluminium roller shutter with spring-loaded winding ensures a large usable depth (215 mm) and safe operation (self-locking). The sturdy steel housing and the aluminium roller shutters ensure stable, secure storage. Punch-outs intended for power supply. Perforated rear panel for using perforated wall hooks (see p. 163), with square perforation 10×10 and 38 mm divisions.




Model	Fastening	W >	D 7	H 1	Art. no. 🞇
with floor	on support pillar via perforated rear panel	1500	250	800	69.850.XXX
with floor	on support pillar via perforated rear panel	2000	250	800	69.851.XXX



optional	2000	175	20	69.855.XXX
Adjustable shelf	1500	175	20	69.854.XXX
	W 2		Kg	Art. no.

W

D **7**



Power conduit set Integrated cable conduit solution.	for W	for power modules	Art. no. 🛚 🎇
Designed for installation in roller shutter cabinet. The power conduit	1500	6×	89.022.XXX
can be equipped with the power modules. see page 145	2000	8×	89.023.XXX




Housing

- Sturdy steel structure
- Version with shelf as an overhead cabinet or alternatively without a shelf as an top-mounted cabinet, see p. 121




Handle

- Integrated handle
- Locking mechanism has no impact on usable depth
- Locking with KEY lock, keyed alike option also possible on request



Power conduit

- Optionally integrated power conduit
- Configurable with power modules (see page 144)



Adjustable shelf

- Optional adjustable shelf
- Adjustment increment: 25 mm

Cabinet systems | Roller shutter cabinets






Roller shutter cabinets

Depending on the model, the cabinets on this page are fitted with: adjustable shelves, galvanised, 30 mm thick, load capacity 60 or 100 kg, pullout shelves and drawers, painted, anthracite grey, RAL 7016, load capacity 50 kg, roller shutter in PVC, colour similar to light grey, RAL 7035



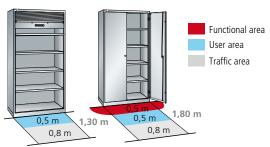

Art. no. **58.401.010** Light blue, RAL 5012



Direct access to all stored items

The smooth-running roller shutter which can be operated with one hand stops at any height without the need for catches.



Strike plate

The sturdy metal strike plate comes with an anti-trap finger guard for safety reasons.



Push handle cylinder lock/ **KEY Lock**

The replaceable cylinder makes it is possible to adapt the locking system as required.



H T 19	950 mm	W	1000 mm	ע ע	580 mm*
Adjustable shelves	Drawers	Pull-out shelves	kg		Art. no. 🛚 🐫
4	-	-	60	KEY Lock	58.401.XXX
2	-	2	50/60	KEY Lock	58.402.XXX
2	1×95	2	50/60	KEY Lock	58.404.XXX
2	-	4	50/60	KEY Lock	58.403.XXX
2	2×95	3	50/60	KEY Lock	58.406.XXX
2	1×95	4	50/60	KEY Lock	58.405.XXX

Slotted adjustable shelves

Adjustable shelves including 4 shelf supports. Specification: steel sheet, galvanised, slotted. Long sides folded by $4 \times 90^{\circ}$. 30 mm thick with load-bearing capacity of 60 or 100 kg.

Dividers for adjustable shelves

For subdividing adjustable shelves. Specification: steel sheet, painted. Colour: light grey, RAL 7035.

Drawers and pull-out shelves

Full extension with ball bearings, including guide rails. Load capacity 50 kg. Specification: steel sheet. Colour: anthracite grey, RAL 7016.

Robust steel tubing construction 40 × 40 mm, closed side panels, incl. fastening material (screw connection between cabinet and base). Optional: base cover to be attached as a cover on the front or rear. Colour: Anthracite grey, RAL 7016.


▶ For cabinet depth mm	Load capacity kg	Art. no.	
Adjustable shelf			
580	60	58.108.000	
580	100	60.409.000	
	Usable dimensions (W×D mm)	980 × 506	

		Usable dimensions (W×D mm)	980 × 506
Divider for adjustable	e shelf		
580		L 490×H 150 mm	58.146.000
Drawer	Η <mark>↑</mark>	Usable height mm	
580	95	72	58.113.000
580	145	122	57.471.000
		Usable dimensions (W×D mm)	867×459
Pull-out shelf	Η <mark>↑</mark>	Usable height mm	58.115.000
580	53	43	
		Usable dimensions (W×D mm)	867×459
Base	H		
580	150		98.216.000
Base cover, H 150 mm			97.986.000





Cabinet systems I Vertical pull-out cabinets

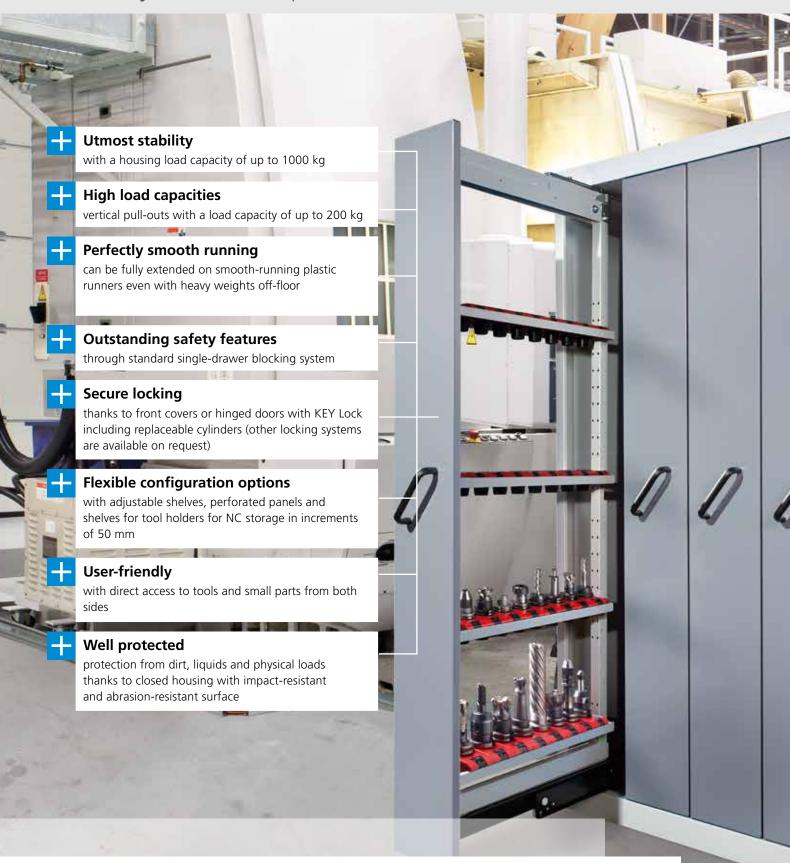

Vertical pull-out cabinets from LISTA provide space-saving storage for tools, supplies and more where space is at a premium. The pull-outs can be used from both sides and can optionally be fitted with perforated panels or shelves to hold plastic containers, tools, documents and LISTA tool holders for NC storage. The result: maximum storage space with a very small footprint. That's what we call efficient.





Art. no. **85.799.010** Fronts light blue, RAL 5012 (excluding storage containers)

Vertical pull-out cabinets

Depending on the model, all cabinets on this page are equipped with: front covers 3×W 307 mm, $4\times W$ 230 mm, pull-outs with a load capacity of 200 kg, perforated panels with square holes 10 × 10 mm, 38 mm apart





Adjustable shelves

The adjustable shelves in two available widths provide optimum storage space for stored items.



NC storage

Safe and space-saving storage of tools in the vertical pull-outs in exchangeable frames.



Perforated panels

Pull-out perforated panels enable flexible attachment of stored items thanks to a wide range of hooks.

For NC tool holders and partitioning schemes see p. 101

For pegboard hooks, plastic storage containers see p. 162

200 oper pull-out







W → 1000 mm



D 7 695 mm



Specification	Pull-outs	kg		Art. no. 🞇
Cabinet with front covers for NC storage				
3 or 4 pull-outs with 4 adjustable shelves each for LISTA NC tool holder (see p. 102), usable dimensions: W 118 × D 554 mm, accommodation length for	3	200	KEY Lock	82.979.XXX
NC tool holder = 554 mm	4	200	KEY Lock	82.980.XXX



Cabinet with front covers and adjustable shelves 3 or 4 pull-outs with 4 adjustable shelves each, plain, 200 KEY Lock 85.792.XXX usable dimensions: W 291/210 × D 584 × H 25 mm 4 200 KEY Lock 85.799.XXX



Cabinet with front covers and perforated panels

cability with from covers and periorated po	ilicis				
3 or 4 pull-outs with perforated panels,	3	200	KEY Lock	85.798.XXX	
H 1700 \times D 612 mm, can be used on both sides					
	4	200	KEY Lock	85.791.XXX	





W → 1000 mm



D 7 600 mm



www.liista.com

Specification	Pull-outs	kg	6	Art. no. 🞇
Cabinet with 2 hinged doors and perforated	d panels			
3 or 4 pull-outs with perforated panels,	3	200	KEY Lock	85.789.XXX
H 1700 × D 560 mm, can be used on both sides, door fitted with hinges, opening angle 115°				
- · · · · · ·	4	200	KEY Lock	85.788.XXX



191

Cabinet systems | Heavy-duty cabinets

LISTA heavy-duty cabinets are perfect for storing heavy materials on adjustable shelves, pull-out shelves and in drawers. Additionally, all common access protection solutions, from retracting doors and hinged doors to vertical roller shutters, can be used. For greater transparency of stored items, doors can be supplied with viewing windows on request.

Utmost stability

with a housing load capacity of up to 1500 kg

High load capacities

160 kg per adjustable shelf, 200 kg per drawer/pull-out shelf

Outstanding safety features – with single drawer blocking mechanism for heavy-duty cabinets with retracting doors to prevent the cabinet from tipping over

User-friendly

because of the fast access to all stored items – retracting doors or smooth-running roller shutters with user-friendly push handle

Secure locking

with retracting doors, hinged doors or roller shutter and intelligent locking systems like CODE/RFID Lock

Well protected

protection from dirt, liquids and physical loads thanks to closed housing with impact-resistant and abrasion-resistant surface

Perfectly organised

with viewing windows made from UV-resistant, shatterproof acrylic

Can be adapted to new storage items at any time

with the flexible integration and rearrangement of drawers, pull-out shelves and adjustable shelves in increments of 25 mm

Fully compatible with LISTA drawer cabinets and drawer storage walls because of the standardised unit of measure

see p. 38 and/or 84









Art. no. 59.542.010 Light blue, RAL 5012

Art. no. 59.543.070 Ruby red, RAL 3003 (excluding partition material)

Heavy-duty cabinets with retracting doors

The cabinets are equipped with: adjustable shelves, galvanised, 33 mm thick, pull-out shelves and drawers, painted, generally grey, NCS 4502-B. Retracting doors folded from one piece, optionally either in solid sheet steel or with viewing windows. Fitted in hinge brackets, retracting range 90°, projection of doors when opened is 85 mm. Anti-tilting is ensured by the single-drawer blocking system. Available with KEY Lock, CODE Lock or RFID Lock locking systems.

54 × 27 E 1950 mm 1146 mm Pull-out Adjustable Drawers Hinge pins Art. no. 🞇 shelves shelves mounted Cabinets with 2 solid sheet retracting doors





Retracting doors

- disappear in the housing when opened in order to give the best possible access (doors only project by 85 mm)
- folded from a single piece
- either made of full sheet steel or equipped with viewing windows
- fitted into hinge brackets, retracting range 90°
- KEY Lock, CODE Lock or RFID Lock locking systems



- fully extendable
- load capacity up to 200 kg



Cabinets with 2 viewing window retracting doors

-	4	-	160	Hinge bracket	KEY Lock	59.540.XXX
2×75 / 1×150	2	2	160/200	Hinge bracket	KEY Lock	59.542.XXX



Robust housing

welded sheet steel construction with integrated support pillar system




When ordering a cabinet from these two pages with CODE or RFID Lock locking system, please add the suffix "C" or "F" to the article number given in the table (e.g. 98.081.XXX.C).





KEY Lock 59.541.XXX

KEY Lock **59.543.XXX**









Cabinet systems I preconfigured heavy-duty cabinets



Art. no. 98.091.100 Signal blue, RAL 5005



Art. no. 98.086.050 Metallic grey, NCS S 6502-B

Heavy-duty cabinets with hinged doors

The cabinets are equipped with: adjustable shelves, galvanised, 35 mm thick, pull-out shelves and drawers, painted, generally grey, NCS 4502-B. Hinged doors folded from one piece, optionally either in solid sheet steel or with viewing windows. KEY, CODE or RFID Locks available.





-	4	-	160	Pin hinge	KEY Lock	98.082.XXX
1 × 100 / 1 × 150	3	-	160/200	Pin hinge	KEY Lock	98.086.XXX
2 × 100 / 2 × 150	2	1	160/200	Pin hinge	KEY Lock	98.094.XXX

Hinged doors

98.093.XXX

- folded from a single piece
- either made of solid sheet steel or equipped with viewing windows
- with pin hinge, opening angle approx. 115°
- Lock with KEY, CODE or RFID Lock

When ordering a cabinet from these two pages with CODE or RFID Lock, please add the suffix "C" or "F", respectively, to the article number stated in the table (e.g. 98.081.XXX.C).







Heavy-duty cabinets with roller shutter

The cabinets are equipped with: adjustable shelves, galvanised, 35 mm thick, pull-out shelves and drawers, painted, generally grey, NCS 4502-B. The smooth-running PVC roller shutter stops at any height without locking. Colour: aluminium colours, the colour of the strike plate with KEY Lock locking system is variable.





Roller shutter

- especially suitable when space is limited
- stops at any height without the need for catches
- aluminium colours, colour of strike plate variable
- KEY Lock locking system

For partition material sets and labelling system see p. 248.





54×27 E	$W \rightarrow \times D \nearrow$	1100 × 641	1146 × 690
H Cabinet height mm		1950	1950
	Clear height (mm)	1790 / 1640	1830
	for design	Hinged doors roller shutter	Retracting doors
		Art. no. 🞇	Art. no. 🛚 🞇
Housing		98.096.XXX	59.544.XXX
Hinged doors excl. clasp lock			
Solid sheet		62.031.XXX	-
Viewing window		62.032.XXX	-
Retracting doors excl. clasp lock			
Solid sheet		-	59.532.XXX
Viewing window		-	59.535.XXX
+ clasp lock			
Key Lock, separately lockable		49.060.000	49.060.000
CODE Lock		49.085.000	49.085.000
RFID Lock		49.086.000	49.086.000
Roller shutter excl. cylinder lock		98.097.XXX	-
+ push handle cylinder lock		62.062.000	-

Drawers

Drawers with different front heights can be incorporated into the same housing in any order. The insides of the drawer walls are all fitted with a slotted grid in units (E) of 17 mm so that each drawer can be partitioned as required. Colour: grey, NCS 4502-B.

Η <mark>↑</mark>	Usable height mm	Cladding height mm		
Drawers				
75	57.5	49	85.700.080	85.700.080
100	82.5	76	85.701.080	85.701.080
150	132.5	126	85.702.080	85.702.080
200	182.5	176	85.703.080	85.703.080
Usable dimer	nsion W × D mm		918×459	918×459
Load capacit	y kg		200	200

Pull-out shelves

For storing heavy individual items and equipment. Perfectly fitting, variable height assembly of 25×25 mm in the cabinet housing. The inserted slats enable stored items to be stored and removed flush with the handle. Specification: steel sheet. Colour: grey, NCS 4502-B. Slats are made of shaped sheet steel profile, sendzimir galvanised.

85.704.080		
918×459		
75	75	
200	200	
	200	

Adjustable shelves, slotted or plain

Adjustable shelves including 4 shelf supports. Adjustable shelf, slotted, **fitting against the rear**. Specification: steel sheet, galvanised. Long sides folded $4\times90^\circ$. Slotted partition; 50 mm. Load capacity: 160 kg.

Adjustable shelf	98.098.000	59.545.000
Usable dimension W × D mm	967 × 549	966×500
Height mm	35	33
Load capacity kg	160	160
Model	Plain	Slotted

Dividers for adjustable shelves

Slotted for separating 2 adjustable shelves attached one above the other. The height of the dividers depends on the distance between the adjustable shelves. Specification: steel sheet. Colour: light grey, RAL 7035.

	Usable height mm	Distance between shelves TE—TE* mm		
Dividers	179	225	_	59.415.000
	329	375	_	59.416.000

^{*} Distance between shelves from top edge to top edge

05 304 000

Base

Robust steel tubing construction $40 \times 40 \, \text{mm}$, closed side panels, incl. fastening material (screw connection between cabinet and base). Optional: base cover to be attached as a cover on the front or rear. Colour: Anthracite grey, RAL 7016.

Base, H 150 mm	97.588.000	59.412.000
Base cover	98.246.000	62.888.000

Cabinet systems | Clothing lockers







Cabinet systems | Clothing lockers



Art. no. **94.424.080** Pigeon grey, NCS S 4502-B

Clothing lockers

1-leaf for 1 lockable compartment

Equipment per compartment

single-leaf solid sheet door, flush-fitting, surface plain or with perforated field for additional ventilation (1 compartment lockable)

1 hat rack

1 clothes rail, with 3 sliding coat hooks

1 towel holder

Compartments width: 300 or 400 mm Clear height: 1280 mm / 300 mm

(hat rack)





300 mm




400 mm

		comparament width		200			
H Cabinet v	vidth mm		600	900	1200	800	1200
₩7 500 mm		Number of compartments	2	3	4	2	3
DT		Door specification	Art. no. 🞇	Art. no. 🞇	Art. no. 👋	Art. no. 🎇	Art. no. 🎇
1700 mm	KEY Lock	plain	94.414.XXX	94.405.XXX	94.417.XXX	94.420.XXX	94.411.XXX
without substructure	KEY Lock	perforated	94.531.XXX	94.534.XXX	94.537.XXX	94.543.XXX	94.546.XXX
1800 mm	KEY Lock	plain	94.426.XXX	94.429.XXX	94.432.XXX	94.438.XXX	94.441.XXX
with base, 100 mm	KEY Lock	perforated	94.552.XXX	94.555.XXX	94.558.XXX	94.564.XXX	94.567.XXX
1850 mm with feet, 150 mm	KEY Lock	plain	94.447.XXX	94.450.XXX	94.453.XXX	94.459.XXX	94.462.XXX
	KEY Lock	perforated	94.573.XXX	94.576.XXX	94.579.XXX	94.585.XXX	94.588.XXX



For colour information see fold-out page. When ordering,







Clothing lockers

1-leaf for 2 lockable compartments

Equipment per compartment

single-leaf solid sheet door, flush-fitting, surface plain or with perforated field for additional ventilation (2 compartments lockable)

1 hat rack

Γ

- 1 clothes rail, with 3 sliding coat hooks
- 1 towel holder

Compartments width: 300 mm **Clear height:** 1280 mm / 300 mm

(hat rack)

compartment width







- the air vents located on the top and bottom of the housing ensure permanent circulation of air in the locker
- door models with individual perforation pattern on request



Air duct

Elimination of odours thanks to high air exchange rate and improved drying through on-site forced ventilation.

Air duct on request.

		J	
Cabinet width mm			

W 7 500 mm		Number of compartments
DT		Door specification
1700 mm	KEY Lock	plain
without substructure	KEY Lock	perforated
1800 mm	KEY Lock	plain
with base, 100 mm	KEY Lock	perforated
1850 mm	KEY Lock	plain
with feet, 150 mm	KEY Lock	perforated
with feet, 150 mm	KEY Lock	perforated

600	1200
2	4
Art. no. 🞇	Art. no. 🞇
94.302.XXX	94.305.XXX
94.320.XXX	94.323.XXX
94.308.XXX	94.311.XXX
94.326.XXX	94.329.XXX
94.314.XXX	94.317.XXX
94.332.XXX	94.335.XXX

300 mm

Clothing lockers

2-leaf for 2 lockable compartments

Equipment per compartment

- 2 solid leaf door, flush fitting, surface plain or with perforated field for additional ventilation (2 compartments lockable)
- 1 hat rack
- 1 clothes rail, with 3 sliding coat hooks
- 1 towel holder

Compartments width: 300 or 400 mm Clear height: 1280 mm / 300 mm

(hat rack)







with feet



with base



Inclined top

Clothes lockers with an inclined top prevent undesired use of the cabinet top as shelf space. Inclined top on request.



Wide range of accessories

On request, you may also order benches, shoe racks, name and number plates, towel holders and more.



Base makes cleaning simpler

The closed base border on the floor makes it easy to clean changing room areas.

		compartment width	300 mm		400 mm
H -> Cabinet w	Cabinet width mm		600	1200	800
W		Number of compartments	2	4	2
D		Door specification	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
1700 mm	KEY Lock	plain	94.342.XXX	94.348.XXX	94.345.XXX
without substructure	KEY Lock	perforated	94.369.XXX	94.375.XXX	94.372.XXX
1800 mm	KEY Lock	plain	94.351.XXX	94.357.XXX	94.354.XXX
with base, 100 mm	KEY Lock	perforated	94.378.XXX	94.384.XXX	94.381.XXX
1850 mm	KEY Lock	plain	94.360.XXX	94.366.XXX	94.363.XXX
with feet, 150 mm	KEY Lock	perforated	94.387.XXX	94.393.XXX	94.390.XXX



Versatile locking systems

cylinder locks, numeric combination locks, coin deposit locks, locking systems for padlocks and master key systems are available. Other locks available on request. When ordering a clothes locker from this double page with closing device for padlock, please specify the suffix "V", or, for rotary knob safety lock, use the suffix "D" in addition to the article number from the table (e.g. 94.429.XXX.V)



Cabinet systems | Dual-level clothing lockers



Art. No. **94.424.080** Pigeon grey, NCS S 4502-B

Dual-level clothing lockers

equipment for each compartment single-leaf solid sheet door, flush-fitting, surface plain or with perforated field for additional ventilation (1 compartment lockable)

- 1 hat rack
- 1 clothes rail, with 3 sliding coat hooks 1 towel holder

Compartments width: 300 or 400 mm Clear height: 1280 mm (for top and

bottom compartment)











000:00:00	
with	base

		compartment width	300 mm			400 mm		
H Cabinet w	/idth mm		600	900	1200	800	1200	
W 7 500 mm		Number of compartments	2×2	3×2	4×2	2×2	3×2	
D		Door specification	Art. no. 🞇	Art. no. 🞇	Art. no. 👋	Art. no. 🞇	Art. no. 🞇	
1700 mm	KEY Lock	plain	94.468.XXX	94.471.XXX	94.474.XXX	94.480.XXX	94.483.XXX	
without substructure	KEY Lock	perforated	94.594.XXX	94.597.XXX	94.600.XXX	94.606.XXX	94.609.XXX	
1800 mm	KEY Lock	plain	94.489.XXX	94.492.XXX	94.495.XXX	94.501.XXX	94.504.XXX	
with base, 100 mm	KEY Lock	perforated	94.615.XXX	94.618.XXX	94.621.XXX	94.627.XXX	94.630.XXX	
1850 mm with feet, 150 mm	KEY Lock	plain	94.510.XXX	94.513.XXX	94.516.XXX	94.522.XXX	94.525.XXX	
	KEY Lock	perforated	94.636.XXX	94.639.XXX	94.642.XXX	94.648.XXX	94.651.XXX	







Cabinet width mm

600

800

900

1200




Single- or double-sided base, height 150 mm

Welded steel construction with angle profiles and adjustable plastic legs for levelling. Colour: Anthracite grey, RAL 7016. **Note:** double-sided (for 2 cabinets, back to back)


Base, H 150mm

W 🗷 mm	Model	Art. no.	Art. no.	Art. no.	Art. no.
500	single-sided	94.252.000	94.253.000	94.254.000	94.255.000
1000	double-sided	94.264.000	94.265.000	94.266.000	94.267.000



Welded steel construction with angle profiles and adjustable plastic legs for levelling. Colour: Anthracite grey, RAL 7016. **Note:** double-sided (for 2 cabinets, back to back)

Base, H 400 mm







Single-sided or double-sided base, height 400 mm

Welded steel construction with angle profiles and adjustable plastic legs for levelling. Colour: Anthracite grey, RAL 7016. **Note:** double-sided (for 2 cabinets, back to back). Bench depth: 300 mm.

Base, H 400 mm

W 7 mm	Model	Art. no.	Art. no.	Art. no.	Art. no.
500	single-sided	94.946.000	94.947.000	94.948.000	94.949.000
1000	double-sided	94.950.000	94.951.000	94.952.000	94.953.000



Fixed or fold-up shoe rack

Can be attached to the bases using attachment brackets without screws. Number required: 1 per clothes locker. Colour: Attachment brackets anthracite grey, RAL 7016; shoe racks galvanised anthracite grey, RAL 7016. Bench depth: 300 mm.

Shoe rack

W 7 mm	Model	Art. no.	Art. no.	Art. no.	Art. no.
230	secure	94.954.000	94.955.000	94.956.000	94.957.000
	Distance between stands mm	310	510	610	910
	Shelf length mm	336	536	636	936
230	folds upward	94.966.000	94.967.000	94.968.000	94.696.000
	Distance between stands mm	310	510	610	910
	Shelf length mm	285	485	585	885



Bench base for in-line installation on request

Upon presentation of a layout plan, the bases are available at **little cost** for single- and/or double-sided construction in a row. In addition, less cleaning is required thanks the small number of leg supports.



Double-sided base, height 400 mm with shoe racks

www.lista.com 201

Cabinet systems | Compartment cabinets











Compartment doors

Different compartment doors, e.g. with viewing windows or mail slot, on request



Inclined top part

An inclined top part prevents the cover from being used inadvertently as shelf space and reduces required cleaning.

Ventilation slots and label frames

The high-quality solid sheet doors provide very high stability and are also equipped with a label frame. Air vents at the top and bottom provide ideal ventilation.





Versatile locking systems

cylinder locks, numeric combination locks, coin deposit locks, locking systems for padlocks and master key systems are available. Other locking devices such as CODE/RFID Lock on request.




with closing device for a padlock, please specify the suffix "V" or, for a rotary knob safety lock, the suffix "D" in addition to the article number from the table (e.g. 11.525.XXX.V).

610	240 mm 905	1200	415	340 mm 810	1205
		1200	415	810	1205
2	3				05
		4	1	2	3
Art. no. 🞇	Art. no. 🞇	Art. no. 🞇	Art. no. 🛚 🐫	Art. no. 🞇	Art. no. 🛚 🐫
-	11.513.XXX	-	-	-	-
11.507.XXX	11.515.XXX	-	-	-	-
11.509.XXX	11.517.XXX	11.521.XXX	-	-	-
11.501.XXX	11.503.XXX	11.505.XXX	11.525.XXX	11.527.XXX	11.529.XXX
11.511.XXX	11.519.XXX	11.523.XXX	-	-	-
97.315.000	97.316.000	97.317.000	97.318.000	97.319.000	97.320.000
97.558.000	97.558.000	97.558.000	97.558.000	97.558.000	97.558.000
	Art. no. 11.507.XXX 11.509.XXX 11.501.XXX 11.511.XXX	Art. no. Art. no. 11.513.XXX 11.507.XXX 11.509.XXX 11.509.XXX 11.501.XXX 11.519.XXX 97.315.000 97.316.000	Art. no. ♣ Art. no. ♣ Art. no. 11.513.XXX - 11.507.XXX 11.515.XXX 11.509.XXX 11.517.XXX 11.521.XXX 11.501.XXX 11.503.XXX 11.505.XXX 11.511.XXX 11.519.XXX 11.523.XXX 97.315.000 97.316.000 97.317.000	Art. no. ♣ Art. no. ♠ Art. no. ♠ Art. no. <td>Art. no. ♣ Art. no.</td>	Art. no. ♣ Art. no.

COLOURS: With preconfigured cabinets housing in light grey, RAL 7035.



Cabinet systems I Battery charging cabinets with hinged doors

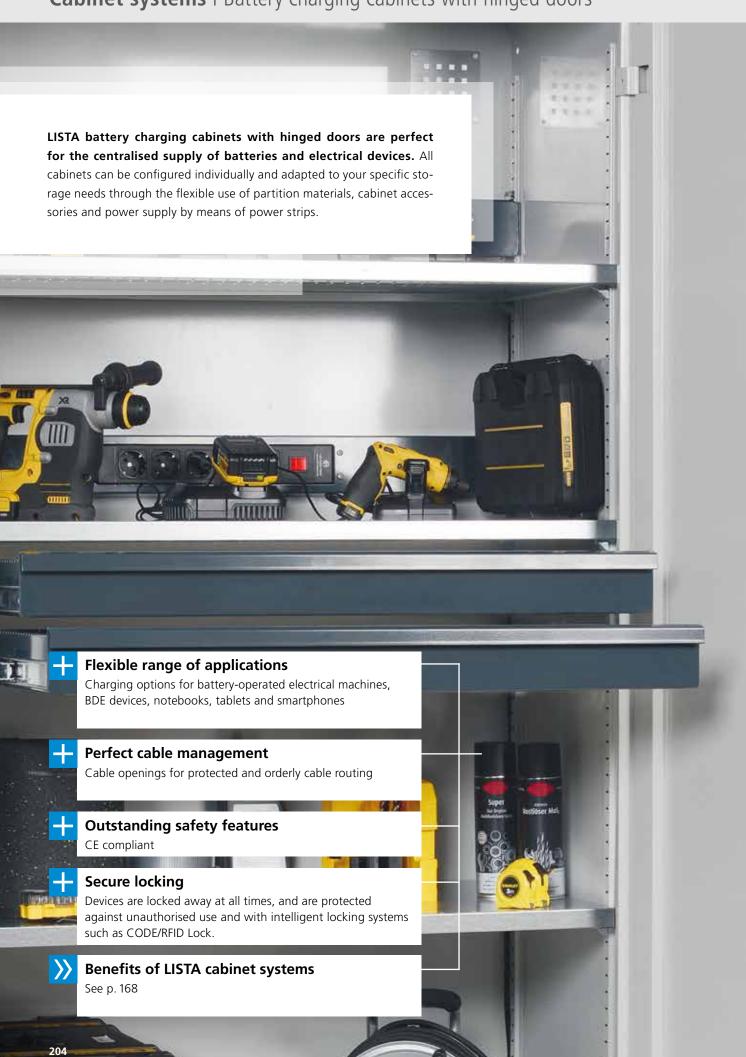



Battery charging cabinets with hinged doors

Depending on the model, the cabinets are equipped with **adjustable shelves**, galvanised, 30 mm thick, load capacity 60 kg. Painted **drawers**, anthracite gray (RAL 7016), load capacity 50 kg. **Power strips** with on/off switches and 4 or 5 sockets, 230 V.



Art. No. **62.955.020** Solid sheet hinged door, light grey (RAL 7035)



Art. No. **62.976.020** Viewing window hinged door, light grey (RAL 7035)



Art. No. **62.959.020** Solid sheet hinged door, light grey (RAL 7035)



Hinged doors with viewing windows

- For greater transparency of stored items
- Encourages order










W → 1000 mm D 7	580 mm H 1950 mm					Solid sh	eet doors	Viewing windows
Number of power strips	Mounting position, power strips	Adjustable shelves	Drawers	kg	Door storage	a	Art. No. 🐫	Art. No. 👋
Model D / Schuko								
1 × 5-socket (230V)	On side panel	4	-	60	Hinge	KEY Lock	62.954.XXX	62.972.XXX
2 × 5-socket (230V)	On side panel	4	_	60	Hinge	KEY Lock	62.955.XXX	62.973.XXX
1 × 5-socket (230V)	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.956.XXX	62.974.XXX
2 × 5-socket (230V)	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.957.XXX	62.975.XXX
2 × 5-socket (230V)	On rear panel/power conduit	3	2×95	60/50	Hinge	KEY Lock	62.959.XXX	62.977.XXX
2 × 5-socket (230V), RCD/MCB**	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.958.XXX	62.976.XXX
Model CH								
1 × 4-socket (230 V)*	On side panel	4	_	60	Hinge	KEY Lock	62.966.XXX	62.984.XXX
2×4-socket (230V)*	On side panel	4	_	60	Hinge	KEY Lock	62.967.XXX	62.985.XXX
1 × 4-socket (230 V)*	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.968.XXX	62.986.XXX
2 × 4-socket (230 V)*	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.969.XXX	62.987.XXX
2 × 4-socket (230 V)*	On rear panel/power conduit	3	2×95	60/50	Hinge	KEY Lock	62.971.XXX	62.989.XXX
2 × 4-socket (230 V)*, RCD/MCB**	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.970.XXX	62.988.XXX
Model F								
1 × 5-socket (230 V)	On side panel	4	_	60	Hinge	KEY Lock	62.960.XXX	62.978.XXX
2 × 5-socket (230 V)	On side panel	4	_	60	Hinge	KEY Lock	62.961.XXX	62.979.XXX
1 × 5-socket (230 V)	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.962.XXX	62.980.XXX
2 × 5-socket (230 V)	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.963.XXX	62.981.XXX
2 × 5-socket (230 V)	On rear panel/power conduit	3	2×95	60/50	Hinge	KEY Lock	62.965.XXX	62.983.XXX
2 × 5-socket (230 V), RCD/MCB**	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	62.964.XXX	62.982.XXX
Model GB								
1 × 5-socket (230 V)	On side panel	4	_	60	Hinge	KEY Lock	57.145.XXX	57.151.XXX
2 × 5-socket (230 V)	On side panel	4	_	60	Hinge	KEY Lock	57.146.XXX	57.152.XXX
1 × 5-socket (230 V)	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	57.147.XXX	57.153.XXX
2 × 5-socket (230 V)	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	57.148.XXX	57.154.XXX
2 × 5-socket (230 V)	On rear panel/power conduit	3	2×95	60/50	Hinge	KEY Lock	57.150.XXX	57.156.XXX
2 × 5-socket (230 V), RCD/MCB**	On rear panel/power conduit	4	_	60	Hinge	KEY Lock	57.149.XXX	57.155.XXX

^{*} With 1× thermal fuse

^{**} RCD = residual current protective device (16 A / 30 mA), MCB = miniature circuit breaker (CH = 10 A, D/F = 16 A)



1000

1250



Cabinet housing

incl. rubber grommets for protected cable feed through perforated rear panel in housing (punch-out) for optional fan installation.

D 7	H	Door storage	Art. No. 🞇	Art. No. 🞇	Art. No. 🞇
500 mm	1000 mm	Hinge	-	62.779.XXX	-
500 mm	1950 mm	Hinge	62.792.XXX	62.780.XXX	62.794.XXX
580 mm	1000 mm	Hinge	-	62.777.XXX	=
580 mm	1950 mm	Hinge	62.793.XXX	62.778.XXX	62.795.XXX



Punch out

perforated rear housing panel for optional installation of a fan



Hinged doors

2 doors excl. clasp lock (must be ordered separately)

	H 1	Door storage	Art. No. 🞇	Art. No. 🞇	Art. No. 🞇
Solid sheet	1000 mm	Hinge	-	62.009.XXX	-
Solid sheet	1950 mm	Hinge	62.006.XXX	62.011.XXX	62.016.XXX
Viewing window	1000 mm	Hinge	-	62.137.XXX	-
Viewing window	1950 mm	Hinge	-	62.012.XXX	62.017.XXX



Hinged bearing assembly

- For the installation of drawers and pull-out shelves, doors must be fitted with hinged bearing assembly
- Doors are flush with the cabinet housing
- Opening angle approx. 115°



Adjustable shelf

Incl. 4 shelf supports. Specification: sheet steel, galvanised, slotted. Long sides folded by $4\times90^\circ$. 30 mm thick with load-bearing capacity of 60 or 100 kg.

D 7 For cabinet of	depth	Art. No.	Art. No.	Art. No.
500 mm	60	58.104.000	58.107.000	58.110.000
500 mm	100	=	60.407.000	60.408.000
580 mm	60	58.105.000	58.108.000	58.111.000
580 mm	100	=	60.409.000	60.434.000
	Jsable dimensions (W × D mm)	730×425/506	980 × 425/506	1230 × 425/506



KEY Lock

Art. No. **49.060.000** Separately lockable



Divider for adjustable shelf

Drawers and pull-out shelves

 $For partitioning \ adjustable \ shelves. \ Specification: \ sheet \ steel, \ painted. \ Colour: \ light \ grey, \ RAL\ 7035.$

Full extension with ball bearings, including guide rails. Load capacity 50 kg. Specification: sheet steel.

D 7 For cabinet depth		Art. No.	Art. No.	Art. No.
500 mm	W 411 × H 150 mm	58.145.000	58.145.000	58.145.000
580 mm	W 490 × H 150 mm	58.146.000	58.146.000	58.146.000



CODE Lock

Art. No. 49.085.000



		Art. No.	Art. No.	Art. No.
Drawer, F	H 95 mm	62.308.000	58.113.000	57.481.000
580 mm	Usable dimensions (W \times D \times H mm)	$617\!\times\!459\!\times\!72$	867×459×72	$1117 \times 459 \times 72$
Drawer,	H 145 mm	-	57.471.000	57.482.000
580 mm	Usable dimensions (W \times D \times H mm)		$867 \times 459 \times 122$	$1117 \times 459 \times 122$
Pull-out s	helf, FH 53 mm	-	58.115.000	-
580 mm	Usable dimensions (W \times D \times H mm)		867×459×43	

Colour: anthracite gray, RAL 7016. Only compatible with cabinets with hinge bearing assembly and a depth of 580 mm.



RFID Lock Art. No. **49.086.000**

Base

Robust steel tubing construction $40 \times 40 \, \text{mm}$, closed side panels. Includes fastening material (screw connection between cabinet and base). Optional: base cover to be attached as a cover on the front or rear. Colour: Anthracite grey, RAL 7016.



	57.238.000	97.986.000	62.806.000
580 mm	98.657.000	98.216.000	97.835.000
500 mm	97.844.000	98.518.000	98.253.000
Base*, FH 150 mm	Art. No.	Art. No.	Art. No.



Power strips

With on/off switch and sockets, 230 V, without power and connection cables

D 7 For cabinet depth	Туре	Description	Art. No.
500 mm	D / PE	4-socket (230V)	82.474.000
500 mm	СН	3-socket (230V)*	82.475.000
500 mm	F	4-socket (230V)	82.476.000
500 mm	GB	4-socket (230V)	62.902.000
580 mm	D / PE	5-socket (230V)	62.763.000
580 mm	СН	4-socket (230V)*	62.782.000
580 mm	F	5-socket (230V)	62.739.000
580 mm	GB	5-socket (230V)	62.903.000

^{*} Incl. thermal fuse 10A



Side panel installation

Fastening kit for power strips

Side panel installation

Includes fastening material for screw connection of the power strips onto the cabinet side panel

For cabinet depth	Art. No.
500 mm	62.771.000
580 mm	62.772.000

Rear panel installation

Power conduit for holding the power strips **(4-socket for CH and 5-socket for D, F and GB).** Fastening material included. Specification: sheet steel. Colour: anthracite gray, RAL 7016.

W → For cabinet width	Art. No.
1000 mm	62.992.000
1250 mm	62.996.000



Rear panel installation

1



Cable fastening

Cable tie and mounting base kit for 2 m cable length

Quantity	Art. No.
5 pieces	390.024.000

Fan

Incl. adapter with integrated European plug For GB, an adapter is required, art. no. **61.160.000.**

Type	Art. No.
12V DC 106	57.467.000



RCD/MCB

RCD = residual current protective device (16 A)
MCB = miniature circuit breaker (CH = 10 A, D/F = 16 A)

Quantity	Art. No.
1 piece	57.101.000





System socket supply cable

Simple and quick electrical installation through plug and socket connector system, 3-pin.

Туре	Length (m)	Art. No.
D / PE	3.0	89.545.000
СН	3.0	89.544.000
F	3.0	89.545.000
GB	3.0	89.546.000



Connecting cable

3-pin connector system with plug and socket

Length (m)	Art. No.
1.0	89.548.000
1.5	390.036.000
2.0	89.549.000
3.0	89.550.000

LED cabinet lighting

12 V LED lighting for cabinet height 1950 mm. Installed at the front right of the cabinet. Consisting of 1 LED light each, length: 800 mm (9 W) and 500 mm (5 W), integrated motion detector requires 1 free slot in one power strip.

Art. No. **57.463.000**

www.lista.com 207

Cabinet systems I Battery charging cabinets with compartments



208





Art. no. **98.409.020** Light grey, RAL 7035



Art. no. **98.416.070** Ruby red, RAL 3003



Versatile locking systems

 Cylinder locks, numeric combination locks, coin deposit locks, locking systems for padlocks and master key systems are available







H 1795 mm, with base 150 mm high



	•••••	•••••	***
	•	•	
		10000	100
	•••••	•••••	
	•	•	.,,
	0		**:
			NAC I
			25.5
	•	۰	1
			•••
- 4			

W→	D 7	No. of com- partments	Shelf dimension $(W \times H mm)$	Type	Module per compartment	Art. no. 🞇
Cabinets	with 8 co	ompartment	ts and KEY Lock			
810 mm	585 mm	2×4	400×400	D / PE	2×230V	98.409.XXX
810 mm	585 mm	2×4	400×400	D / PE	1×230V, 2×USB	98.415.XXX
810 mm	585 mm	2×4	400×400	D / PE	1×230V, 1×RJ45	98.419.XXX
810 mm	585 mm	2×4	400×400	CH	2×230V	98.411.XXX
810 mm	585 mm	2×4	400×400	CH	1×230V, 2×USB	98.629.XXX
810 mm	585 mm	2×4	400×400	CH	1×230V, 1×RJ45	98.631.XXX
810 mm	585 mm	2×4	400×400	F	2×230V	98.413.XXX
810 mm	10 mm 585 mm 2×4		400×400	F	1×230 V, 2×USB	98.417.XXX
810 mm	585 mm	2×4	400×400	F	1×230V, 1×RJ45	98.421.XXX
810 mm	310 mm 585 mm 2×4		400×400	GB	2×230V	98.455.XXX
810 mm	585 mm	mm 2 × 4 400 × 400 GB		GB	1×230V, 2×USB	98.457.XXX
810 mm	585 mm	2×4	400×400	GB	1×230V, 1×RJ45	98.459.XXX

Cabinets	with 12 co	ompartme	nts and KEY Loc	k		
1205 mm	585 mm	3×4	400×400	D / PE	2×230V	98.410.XXX
1205 mm	585 mm	3×4	400×400	D / PE	1×230 V, 2×USB	98.416.XXX
1205 mm	585 mm	3×4	400×400	D / PE	1×230V, 1×RJ45	98.420.XXX
1205 mm	585 mm	3×4	400×400	CH	2×230V	98.412.XXX
1205 mm	585 mm	3×4	400×400	CH	1×230 V, 2×USB	98.630.XXX
1205 mm	585 mm	3×4	400×400	CH	1×230V, 1×RJ45	98.632.XXX
1205 mm	585 mm	3×4	400×400	F	2×230V	98.414.XXX
1205 mm	585 mm	3×4	400×400	F	1×230 V, 2×USB	98.418.XXX
1205 mm	585 mm	3×4	400×400	F	1×230V, 1×RJ45	98.422.XXX
1205 mm	585 mm	3×4	400×400	GB	2×230V	98.456.XXX
1205 mm	585 mm	3×4	400×400	GB	1×230V, 2×USB	98.458.XXX
1205 mm	585 mm	3×4	400×400	GB	1×230V, 1×RJ45	98.460.XXX




2×socket, 230V



Socket 230V/RJ45, without network cable, Plug+Play, Cat6



Socket 230V/Power USB











Art. no. **98.160.010** Pale blue, RAL 5012

Clothes lockers

The clothes lockers are equipped with the following for each compartment: Single-leaf solid sheet door, flush-fitting, smooth surface (1 compartment lockable), 1 hat shelf, 1 clothes rack with 3 sliding coat hooks, 1 towel holder, 2 × 230 V sockets.



H Cabinet width mm				600	900
W 7 500 mm		Numb	per of compartments Door specification	2 plain	3 plain
D↑	Model	Modules per compartment	•	Art. no. 🞇	Art. no. 🛚 🐫
1800 mm	D/Schuko	2×230V	KEY Lock	98.156.XXX	98.158.XXX
with base, 100 mm	СН	2×230V	KEY Lock	98.155.XXX	98.157.XXX
	F	2×230V	KEY Lock	98.161.XXX	98.159.XXX
	GB	2×230V	KEY Lock	98.162.XXX	98.160.XXX

E-scooter cabinets

The e-scooter cabinets are equipped with the following for each compartment: single-leaf solid sheet door, flush-fitting, perforated field for additional ventilation (1 compartment lockable), 1 hat shelf, 1 clothes rack with 3 sliding coat hooks, 1 velcro holder, $2 \times 230 \, \text{V}$ sockets.




H→ mm	W 7 mm	D ↑ mm	Model	Number of compartments × compartment width (mm)	Modules per compartment	•	Art. no. 🞇
1000	500	1700	D/Schuko	2×500	$2 \times 230 \text{ V}$	KEY Lock	98.166.XXX
1000	500	1700	СН	2×500	2×230V	KEY Lock	98.167.XXX
1000	500	1700	F	2×500	2×230V	KEY Lock	98.168.XXX
1000	500	1700	GB	2×500	2×230V	KEY Lock	98.169.XXX



Power modules for clothes lockers and e-scooter cabinets



Connecting cable



Clothes rack



300 mm

compartment width

Hook and loop fastener for e-scooter cabinet



Cabinet systems I Battery charging cabinets for laptops









Art. no. **98.416.070** Ruby red, RAL 3003

W <mark>→</mark> mm	D 7	H 1	No. of compartments	Shelf dimension (W×Hmm)	Туре	Module per compartment	Art. no. 🛚 👯
Laptop cabi	nets with 10 o	compartments	s and cylinder lock				
415	500	1790	1 × 10	330 × 140	D / PE	1×230V	98.600.XXX
415	500	1790	1 × 10	330 × 140	D / PE	2×230V	98.582.XXX
415	500	1790	1 × 10	330 × 140	CH	1×230V	98.597.XXX
415	500	1790	1 × 10	330 × 140	CH	2×230V	98.583.XXX
415	500	1790	1 × 10	330 × 140	F	1×230V	98.598.XXX
415	500	1790	1 × 10	330 × 140	F	2×230V	98.584.XXX
415	500	1790	1 × 10	330 × 140	GB	1×230V	98.599.XXX
415	500	1790	1 × 10	330×140	GB	2×230V	98.585.XXX



Power modules for laptop cabinet

Socket strip can be ordered with one or two 230 V sockets per compartment.



USB adapter for sockets

 $1\times$ USB-C connection, $3\times$ USB-A connection Overcharge, deep discharge, overload and short-circuit protection Colour: Black

Art. no. **61.257.000**



When ordering a laptop cabinet on this page with **CODE/RFID Lock**, please specify the suffix **"F"** in addition to the article number from the table (e.g. **98.600.**XXX.**F**)



Cabinet systems | Battery charging cabinets as an e-bike charging station










Art. no. **61.217.498** Pale grey, RAL 7035 Pale blue, RAL 5012



Art. no. **61.218.499** Pale grey, RAL 7035 Metallic grey, NCS S 6502-B



Socket outlet 230V/16A with cover, FI/LS switch per compartment

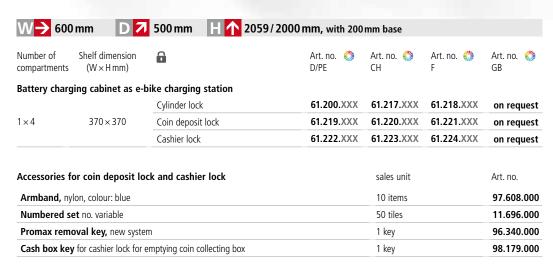




Cylinder lock with 3 keys and key security card



Coin deposit lock with door plate (without IP × 4 protection)







Cashier lock mechanical (without IP × 4 protection)

www.lista.com 215

Cabinet systems | Environmental and oil cabinets











Observe legal regulations and directives

The canisters may only be filled with acid- and lye-free liquids (no abrasive media), oils and grease with a flame point above 55° Celsius. Maximum ambient temperature 40° Celsius. Please call us for special applications and further information.



Note:

Not suitable for storage of flammable materials

Oil cabinets

The cabinets are fitted with: chromium steel drip trays, 2 mm thick, welded to form a liquid-tight seal according to Section 19 of the Water Resources Act/German directive on steel trays (StawaR), 40-litre capacity, canister shelves (painted grey), NCS 4502-B, canister made of HDPE plastic with outlet valve (glossy chrome finish). Solid-sheet hinged doors folded from one piece, with fulcrum pins, 235-degree opening angle.





Cabinets with 2 solid sheet doors

wg .	Door storage		AILIIO.
200	Fulcrum pin	KEY Lock	71.460.XXX
200	Fulcrum pin	KEY Lock	71.461.XXX
	200	200 Fulcrum pin	200 Fulcrum pin KEY Lock

Door storage



Canister with outlet tap

Fitted with screw cap. Filter in the filler neck. Outlet tap, glossy chrome finish with seal. Specification: HDPE plastic, transparent.

Width	Depth	Height	Volumetric capacity	Art.no.
120 mm	440 mm	270 mm	10	14.990.000
150 mm	440 mm	490 mm	25	14.991.000

W77777

Canister shelf

Art no 🌺

The canister shelf has a handle on the left and right and a centre lip. It is only 27 E (451 mm) deep so there is enough room in the front area for the canister tap.



Built-under drainage tray for oil cabinet

The built-under drainage tray of the oil cabinet has a leak-proof welded construction according to the Water Resources Act Sec. 19/StawaR (German directive on steel trays) and has a test certificate. It has a volumetric capacity of 40 l.

Art.no. **14.995.000**



Drip trays

The drip trays feature a leak-proof welded construction according to StawaR (German directive on steel trays) and have a test certificate.

Environmental cabinets

The cabinets are fitted with: galvanised drip trays, 3 mm thick, welded to form a liquid-tight seal according to Section 19 of the Water Resources Act/German directive on steel trays (StawaR), 20-litre capacity. Solid-sheet hinged doors folded from one piece, with hinges, 115-degree opening angle.

1950 mm



Cabinet with 2 solid sheet doors

Equipment	kg	Door storage		Art. no. 🞇
4 drip trays Tank dimensions:	100	Hinge	KEY Lock	60.474.XXX
$982 \times 445 \times 70 \text{mm} (\text{W} \times \text{D} \times \text{H})$				



D 7 500 mm

VERSATILE AND ROBUST

Whether for files, liquids, equipment or tools: shelving systems from LISTA offer tailor-made storage solutions for practically all requirements. High load capacities and a distinctly robust design guarantee optimum use of space and high storage capacity. Many shelving systems are now also available in a galvanised version. The more impressive new feature is that the universal shelving system has been completely overhauled to allow even more flexible solutions for a wide variety of working environments.





The right solution for every need



L1006 universal shelving see p. 220



Heavy-duty pull-out shelving systems see p. 238



Drawer storage walls see p. 84



Sliding shelf units*



Storage and sloping shelving systems*



Wide span shelving systems*




Pallet shelving systems*



Cantilever shelving systems*



Mobile shelving systems see p. 246

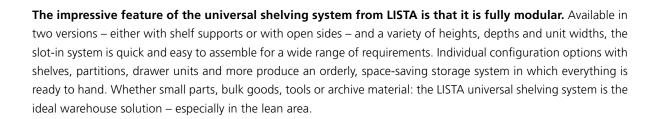



ALWAYS WITH LISTA

Choice of colours

12 standard colours, all other colours available; see p. 22. Many shelving systems are also available in a galvanised version.

Intelligent locking systems

Replaceable cylinders that can be fitted to existing locking systems, electronic locking systems via CODE and RFID Lock for absolute security made to measure; see p. 28.

Individual configuration options

in size, equipment, locking system, colour and drawer partitions; see p. 10.

Fully combinable


Standardised dimensions for all LISTA universal shelving systems of varying designs.





Fully modular and available in a wide range of versions

All individual parts and accessories of the universal shelving system can be freely positioned and combined with one another in a modular fashion — and this applies to both equipment versions (with shelf supports or with side panel).

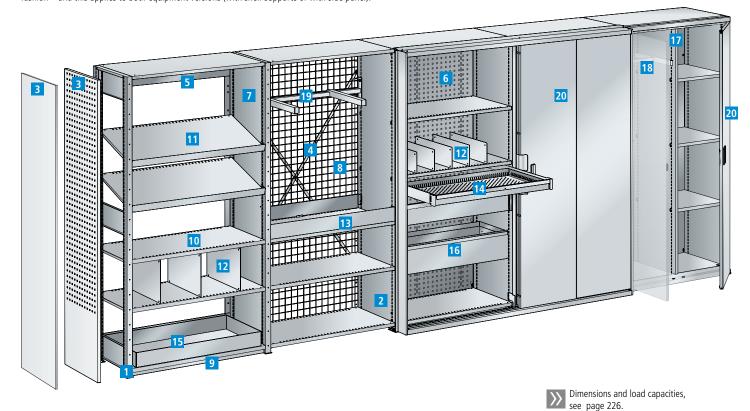

1 Shelf supports

Sturdy, open layout with a maximum load per unit of 2,800 kg, optional extension unit for shelving heights up to 5 m.

2 Side panel

Elegant closed layout with a maximum load per unit of 1,000 kg also prevents the stored items from falling out

3 Side panel cover, plain or perforated

For covering the open shelf supports or the row of slots on the side panels, perforated version for tool hooks

4 Diagonal brace

For stabilising the shelving units lengthwise

5 Lengthwise braces

Used instead of diagonal braces to make both sides accessible

Rear panel, plain or perforated

For covering the rear panel of shelving units; also stabilises the units lengthwise, perforated version for tool hooks

7 Partition

Placed between the shelf supports

8 Grating

Can be used as side panel covers, rear panels and partitions, prevents access and yet guarantees visibility and ventilation

9 Base cover

Protects against dust and dirt. Also prevents items from sliding underneath the unit

10 Shelf

High compartment loads of 80 to $350\,\mathrm{kg}$ (edge height $25\,\mathrm{mm}$) for maximum use of space, in a choice of plain or slotted

11 Sloping shelf LEAN

Retrofittable stop bars for fitting shelves at an incline, for providing ergonomic access to materials and parts

12 Partitions and shelf dividers

For subdividing slotted shelves, ideal for storing small parts and small boxes

13 Shelf front cover strip

For the neat and tidy storage of bulk goods

14 Drawer

Fully extendable with load capacity of 50 kg for space-saving storage of small parts; extensive range of partition material

15 Drip tray

For storing liquids and for use as a drip tray

16 Pull-out suspension filing frame

Suitable for A4 suspension files; load capacity 50 kg for the orderly storage of and easy access to suspension files

17 Centre partition

For the vertical subdivision of complete shelf units

18 Clothes rail

Perfect for storing clothing and protective workwear

19 Organising rail

For vertical storage, compartment division and for storing ring-shaped materials (cables, vee belts and tubing)

20 Hinged and sliding doors

Secure access and dust protection with hinged doors or space-saving sliding doors, lockable



The universal shelf unit offers storage solutions for a wide variety of requirements in workshops and offices. Since it takes ergonomic factors into account and implements the 5S principles, it is especially suitable for lean working environments.



Storage of tools and spare parts

Perfect order and cleanliness according to the 5S principle



Storage of boxes and containers

• Ergonomic access to materials at the workplace according to lean criteria



Storage of bulk goods

Structured and efficient storage of bulk goods



Shelf units with sloping shelves

Ergonomic access to materials at the workplace



Shelf cabinet system with lockable doors and drawers

• Safekeeping of small parts and tools



Storage of lever-arch files, folders and suspension files

Well-organised and within reach



Clothing locker shelf units

Storage of clothing and protective workwear



Double-stack shelving systems

Optimum use of space

Individual configuration options

Typical configurations



- Drawers for safekeeping of small parts
- Shelf front cover strips for tidy storage of loose bulk goods
- Organising rail for storing cables and tubing
- Tyre shelves for storing narrow and wide wheels









Configure and order L1006 universal shelving individually



- Choice of shelf dimensions W×D (e.g.: 1000 × 500 mm)
- To calculate the external dimension, please refer to the planning instructions on p. 226/227





- Choice of "shelf supports" or "side panel". Design combinations available on request!
- Choice of shelving height H
- Optional: shelf support cover, extension units, side panel covers and partitions, floor anchoring, levelling plates



2. Stabilising elements

• Choice of stabilising elements: diagonal braces, rear panels or lengthwise braces





- Elegant, closed side panel
- Pull-out suspension filing frame for orderly, easily accessible suspension files
- Partitions for orderly storage of and easy access to files and folders
 Shelves with an edging height of only 25 mm so that the full height of a file is available











3. Shelves

- Choice of shelves (plain, slotted) and compartment load
- Optional: Stop bars for sloping shelves, shelf labelling, partitions and dividers



4. Accessories

- Optional: Choice of accessory shelf front cover strips, drawers, partition material, drip trays, clothes rails, Cover panels, etc.
- Choice of tyre compartment level pair for tyre storage, see p. 235





Optional: Hinged and sliding doors



Optional: sideboard


Shelving systems I Universal shelf unit L1006, shelf support layout

Dimensions and load capacities

Max. load per unit 2,800 kg with a distance between shelves of max. 750 mm

Max. compartment load: 80, 160, 220, 280, 350 kg

Adjustment increment: 25 mm

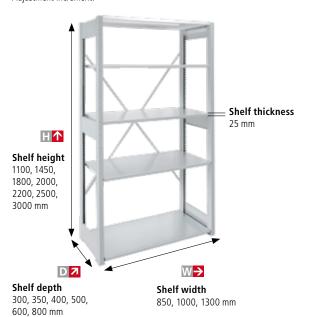



Planning instructions

Calculating the external dimensions

Overall width of shelving: Total shelving widths + number of supports \times 40 mm + 10 mm (base plate external)

Overall depth of shelving: Shelf depth +4 mm







Safety instructions

Anchoring rule Units with a depth to height ratio greater than 1:5 (1:4 for units with hinged doors and single units with drawers) must be anchored. Floor anchoring: Art. no. **130.555.000** (each).

Arrangement of diagonal braces For each basic unit and for each third add-on unit, an extra diagonal brace is required. Instead of diagonal braces, rear panels can be used — or lengthwise braces in order to make the unit accessible from both sides. Diagonal brace: Art. no. **50.026.000**.

Basic and add-on shelf units

Basic unit

2 pairs of shelf supports incl.6 horizontal braces1 diagonal brace, galvanised5-6 shelves, slotted (thickness 25 mm)



Add-on unit

1 pair of shelf supports, incl. 3 horizontal braces 5-6 shelves, slotted (thickness 25 mm)



				D 7 400	D 7 400 mm		500 mm		600 mm	
Н↑	W >	Number of shelves	Shelf load	Basic unit Art. no. 🞇	Add-on unit Art. no. 🞇	Basic unit Art. no. 🞇	Add-on unit Art. no. 🞇	Basic unit Art. no. 🞇	Add-on unit Art. no. 🞇	
			160	50.200.XXX	50.201.XXX	50.202.XXX	50.203.XXX	50.204.XXX	50.205.XXX	
	1000	5	220	50.236.XXX	50.237.XXX	50.238.XXX	50.239.XXX	50.240.XXX	50.241.XXX	
2000			160	50.206.XXX	50.207.XXX	50.208.XXX	50.209.XXX	50.210.XXX	50.211.XXX	
	1300	5	220	50.242.XXX	50.243.XXX	50.244.XXX	50.245.XXX	50.246.XXX	50.247.XXX	
			160	50.212.XXX	50.213.XXX	50.214.XXX	50.215.XXX	50.216.XXX	50.217.XXX	
	1000	5	220	50.248.XXX	50.249.XXX	50.250.XXX	50.251.XXX	50.252.XXX	50.253.XXX	
2200			160	50.218.XXX	50.219.XXX	50.220.XXX	50.221.XXX	50.222.XXX	50.223.XXX	
	1300	5	220	50.254.XXX	50.255.XXX	50.256.XXX	50.257.XXX	50.258.XXX	50.259.XXX	
			160	50.224.XXX	50.225.XXX	50.226.XXX	50.227.XXX	50.228.XXX	50.229.XXX	
	1000	6	220	50.260.XXX	50.261.XXX	50.262.XXX	50.263.XXX	50.264.XXX	50.265.XXX	
2500			160	50.230.XXX	50.231.XXX	50.232.XXX	50.233.XXX	50.234.XXX	50.235.XXX	
	1300	6	220	50.272.XXX	50.273.XXX	50.280.XXX	50.281.XXX	50.288.XXX	50.289.XXX	




Dimensions and load capacities

Max. load per unit 1,000 kg

Max. compartment load: 80, 160, 220, 280 kg


Adjustment increment: 25 mm

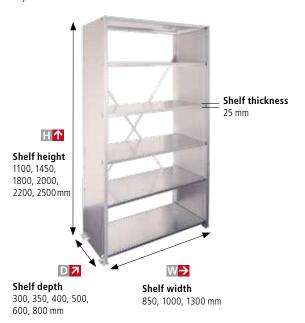


Planning instructions

Calculating the external dimensions

Overall width of shelving: Total shelf widths +50 mm (base plate external) Overall depth of shelving: Shelf depth +36 mm





Max. base and extension section per shelving unit

Permissable section load with rear panels (kg)	max.	max.	max.	max.	max.
	1050	1000	950	900	850
Permissable section load with diagonals or longitudinal connectors (kg)	max.	max.	max.	max.	max.
	800	770	750	710	680
Shelf spacing (mm)	150	300	450	600	max. 750



The load data apply only for uniformly distributed load! Please observe the safety instructions on page 226.

Basic and add-on shelf units

Compartment load 5 80 or 160 kg, galvanised or painted



Basic unit

2 solid sheet side panels

1 diagonal brace, galvanised 4-7 shelves, plain (thickness 25 mm)

Add-on unit

1 solid sheet side panel

4-7 shelves, plain (thickness 25 mm)



Basic unit

2 solid sheet side panels

1 rear panel, plain (2-part)

4-7 shelves, plain (thickness 25 mm)

Add-on unit

1 solid sheet side panel

1 rear panel, plain (2-part)

4-7 shelves, plain (thickness 25 mm)



Basic unit

2 solid sheet side panels

1 rear panel, plain (2-part)

1 hinged door, lockable

6-7 shelves, plain (thickness 25 mm)



Add-on unit 1 solid sheet side panel

1 rear panel, plain (2-part)

1 hinged door, lockable 6–7 shelves, plain (thickness 25 mm)



Basic unit

2 solid sheet side panels

1 rear panel, plain (2-part) 7 drawers (3 × 100, 4 × 150 mm)

4 shelves, plain (thickness 25 mm)

Add-on unit

1 solid sheet side panel

1 rear panel, plain (2-part)

7 drawers (3 × 100, 4 × 150 mm) 4 shelves, plain (thickness 25 mm)

Separate components and extensive range of accessories see p. 228

$W \rightarrow D 7$		1000 × 3	350 mm	1000 × 500 mm		
		Compartmer	nt load 80 kg	Compartment load 160 kg		
		Basic unit	Add-on unit	Basic unit	Add-on unit	
H ↑ mm	Number of shelves	Art. no. 🞇	Art. no. 🞇	Art. no. 🛚 🐫	Art. no. 🞇	
1100	4	45.919.XXX	45.928.XXX	-	-	
1450	5	45.922.XXX	45.931.XXX	-	-	
1800	6	45.925.XXX	45.934.XXX	-	-	
2000	6	50.300.XXX	50.301.XXX	50.302.XXX	50.303.XXX	
2200	7	50.304.XXX	50.305.XXX	50.306.XXX	50.307.XXX	
1100	4	45.955.XXX	45.964.XXX	-	-	
1450	5	45.958.XXX	45.967.XXX	-	-	
1800	6	45.961.XXX	45.970.XXX	-	-	
2000	6	50.308.XXX	50.309.XXX	50.405.XXX	50.406.XXX	
2200	7	50.407.XXX	50.408.XXX	50.409.XXX	50.410.XXX	


2000	6	50.411.XXX	50.412.XXX	50.413.XXX	50.414.XXX
2200	7	50.415.XXX	50.416.XXX	50.417.XXX	50.418.XXX

2000	4	-	_	50.419.XXX	50.420.XXX
2200	4	-	-	50.421.XXX	50.422.XXX

Shelving systems I Universal shelving L1006, single components

1a. Pair of shelf supports 🎳 Max. load per unit, 2,800 kg

Consisting of 2 shelf supports, 2 base plates and 3 horizontal braces (4 horizontal braces for height of 3000 mm). Slots 25 mm apart for attaching shelf supports at any height, including fastening material. Specification: Shelf supports in cold-rolled C profile, 40 × 75 mm, with 6 edge turns for maximum stability. Base plate, galvanised. Without Floor anchoring. Colour: As per colour chart or galvanised.

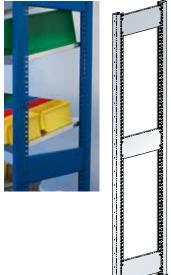

D 7	300	350	400	500	600	800
Η <mark>↑</mark>	Art. no. 🛚 🐫	Art. no. 🎇	Art. no. 🛚 🐫			
1100	45.680.XXX	45.681.XXX	45.682.XXX	46.380.XXX	46.381.XXX	46.382.XXX
1450	45.683.XXX	45.684.XXX	45.685.XXX	46.383.XXX	46.384.XXX	46.385.XXX
1800	45.686.XXX	45.687.XXX	45.688.XXX	45.689.XXX	45.690.XXX	45.691.XXX
2000	50.000.XXX	50.001.XXX	50.002.XXX	50.003.XXX	50.004.XXX	50.005.XXX
2200	50.516.XXX	50.517.XXX	50.518.XXX	50.519.XXX	50.520.XXX	50.521.XXX
2500	50.006.XXX	50.007.XXX	50.008.XXX	50.009.XXX	50.010.XXX	50.011.XXX
3000	45.692.XXX	45.693.XXX	45.694.XXX	45.695.XXX	45.696.XXX	45.697.XXX
Dimensions (W×D) mm	40×304	40×354	40×404	40×504	40×604	40×804



Additional horizontal braces

Specification: Steel sheet. Colour: As per colour chart or galvanised.

Art. no. 🛚 🎇	Art. no. 🛚 🐫				
15.510.XXX	45.511.XXX	45.512.XXX	45.513.XXX	45.514.XXX	45.515.XXX



Shelf support cover

For covering the top of shelf supports. Specification: Steel sheet. Colour: As per colour chart or galvanised.

Art. no. 🜼	Art. no. 🛚 🎇	Art. no. 🞇	Art. no. 🛚 🎇	Art. no. 🛚 🐫	Art. no. 🞇
50.510.XXX	50.511.XXX	50.512.XXX	50.513.XXX	50.514.XXX	50.515.XXX



Intermediate fill-in strip

To close off intermediate spaces when shelves are at the same height. Not suitable for use with partitions. Description: sheet steel. Colour: according to colour chart or galvanised.

| Art. no. 🛚 🐫 |
|--------------|--------------|--------------|--------------|--------------|--------------|
| 45.810.XXX | 45.811.XXX | 45.812.XXX | 45.813.XXX | 45.814.XXX | 45.815.XXX |



Extension unit, per pair of shelf supports

For shelving heights up to 5 m including fastening material. The static calculations for the extension will be carried out by LISTA's specialists. Specification: Galvanised.

Art. no. 50.484.000














Solid sheet side panel 🗂 Max. load per unit 1,000 kg

Standard with triangular folded reinforcing at the front. Slots 25 mm apart for attaching shelf supports. Including base plate set, galvanised. Specification: Steel sheet. Without Floor anchoring. Colour: As per colour chart or galvanised.







! NEW! Shelf heights 1,100mm, 1,450 mm and 1,800 mm for 3, 4 or 5 file heights

Adapter side panel with T-edging for combining depth 350 with 500 mm including 2 shelf supports

D 7	500
Η <mark>↑</mark>	Art. no. 🞇
2000	50.032.XXX
2200	50.033.XXX
2500	50.034.XXX
Dimensions (W × D) mm	30×536



Shelf supports for additional shelves

For the adapter side panel with T-edge, special shelf supports are required if shelves at the same height are used next to one another. Two of these are required for each shelf.

Art. no.

10 pieces **45.739.000**



Levelling plates, 50 × 100 mm

To compensate for height. Enable units to be aligned with precision on uneven floors. Specification: PVC. Colour: Grey.

Art. no. Thickness 1 mm Thickness 2 mm Thickness 4 mm 50.481.000 50.482.000 50.483.000



Floor anchoring

Please follow the assembly instructions provided. For single shelf units, 2 per side panel or 2 per pair of shelf supports.

Floor anchor	Art. no.
M8×80, each	50.299.000





Please observe the safety

instructions on page 226.

Shelving systems I Universal shelving L1006, single components







Side panel cover, plain or perforated


Add-on panel for covering the shelf supports or the rows of slots in the solid sheet side panels. Can be attached left or right. For perforated side panel cover: 10×10 mm square holes and 38 mm divisions for holding keyhole hooks. Specification: Steel sheet, 2-part for height 3000 mm (1000 + 2000 mm). Colour: As per colour chart or galvanised.

D 7	1	300	350	400	500	600	800
Н↑	_	Art. no. 🞇	Art. no. 🧌	Art. no. 🞇	Art. no. 👋	Art. no. 👋	Art. no. 🜼
1100	Plain	45.616.XXX	45.617.XXX	45.618.XXX	46.404.XXX	46.405.XXX	46.406.XXX
	Plain, per pair*	-	45.890.XXX	45.894.XXX	-	-	-
1450	Plain	45.619.XXX	45.620.XXX	45.621.XXX	46.407.XXX	46.408.XXX	46.409.XXX
	Plain, per pair*	-	45.891.XXX	45.895.XXX	-	-	-
1800	Plain	45.622.XXX	45.623.XXX	45.624.XXX	45.646.XXX	45.647.XXX	45.648.XXX
	Plain, per pair*	-	45.892.XXX	45.896.XXX	-	-	-
2000	Plain	50.012.XXX	50.013.XXX	50.014.XXX	50.015.XXX	50.016.XXX	50.017.XXX
	Plain, per pair*	-	45.893.XXX	45.897.XXX	-	-	-
	Perforated	50.337.XXX	50.338.XXX	50.339.XXX	50.340.XXX	50.341.XXX	50.342.XXX
2200	Plain	50.331.XXX	50.332.XXX	50.333.XXX	50.334.XXX	50.335.XXX	50.336.XXX
	Perforated	50.343.XXX	50.344.XXX	50.345.XXX	50.346.XXX	50.347.XXX	50.348.XXX
2500	Plain	50.018.XXX	50.019.XXX	50.020.XXX	50.021.XXX	50.022.XXX	50.023.XXX
	Perforated	50.349.XXX	50.350.XXX	50.351.XXX	50.352.XXX	50.353.XXX	50.354.XXX
3000	Plain	45.820.XXX	45.821.XXX	45.822.XXX	45.823.XXX	45.824.XXX	45.825.XXX
	Perforated	45.826.XXX	45.827.XXX	45.828.XXX	45.829.XXX	45.830.XXX	45.831.XXX
Dimensi	ions (W) mm	21	21	21	21	21	21

^{*}Filler panels (left and right) for covering the rows of slots in the side panels and for flush closure with the front triangular edging of the side panels.







Grating cover, side panel cover or partition (plain) for shelf supports

Side panel grating cover: The gratings are clamped in place by the shelf supports and shelves. Can also be used as partition. Specification: Steel wire 3.0 mm, mesh size 50×50 mm, galvanised, blue chromated according to DIN 50961. Partition (plain): Is placed between the shelf supports and held in place by the shelves. Specification: Steel sheet, 2-part for height 3000 mm (1000 + 2000 mm). Colour: As per colour chart or galvanised.

D 7		300	350	400	500	600	800
Η <mark>↑</mark>		Art. no. 🞇					
2000	Grating	50.387.000	50.388.000	50.389.000	50.390.000	50.391.000	50.392.000
	Plain	50.375.XXX	50.376.XXX	50.310.XXX	50.311.XXX	50.312.XXX	50.377.XXX
2200	Grating	50.393.000	50.394.000	50.395.000	50.396.000	50.397.000	50.398.000
	Plain	50.378.XXX	50.379.XXX	50.380.XXX	50.381.XXX	50.382.XXX	50.383.XXX
2500	Grating	50.399.000	50.400.000	50.401.000	50.402.000	50.403.000	50.404.000
	Plain	50.384.XXX	50.385.XXX	50.313.XXX	50.314.XXX	50.315.XXX	50.386.XXX
3000	Grating	45.832.000	45.833.000	45.834.000	45.835.000	45.836.000	45.837.000
	Plain	45.838.XXX	45.839.XXX	45.840.XXX	45.841.XXX	45.842.XXX	45.843.XXX
Dimensio	ns (W) mm	3	3	3	3	3	3



Base covers

Protects against dust and dirt. The base covers rest on the base plates and are hooked into the shelf supports or side panels by shelf supports. Including fastening material. Specification: Steel sheet. Colour: as per colour chart, **not available in galvanised version.**

$W \rightarrow$	850	1000	1300
H	Art. no.	Art. no.	Art. no.
25 mm	50.432.XXX	50.433.XXX	50.434.XXX





Diagonal brace

For stabilising the shelving units lengthwise. Fastening material included. Specification: Steel, galvanised.

Diagonal brace arrangement:

For each basic unit and for every third add-on unit, an extra diagonal brace is required.

H	W->	Model	Art. no.
1100-1450	850-1000	for shelf supports and solid sheet side panel	45.655.000
1100-1450	1300	for shelf supports	327.795.000
1100-1450	1300	for solid sheet side panel	344.289.000
1800-2500	850-1300	for shelf supports and solid sheet side panel	50.026.000
3000	850-1300	for shelf supports and solid sheet side panel	45.844.000




Lengthwise braces

Instead of diagonal braces, lengthwise braces (at the top and bottom) can be used in order to make the unit accessible from both sides.

Including fastening material. Specification: Steel sheet.

Colour: As per colour chart or galvanised.

W >	850	1000	1300
version	Art. no. 🛚 🞇	Art. no. 🛚 🎇	Art. no. 🛚 🎇
For shelf supports, per pair, height 185 mm	50.319.XXX	50.320.XXX	50.321.XXX
For solid sheet side panel, per pair, height 185 mm	50.322.XXX	50.323.XXX	50.324.XXX

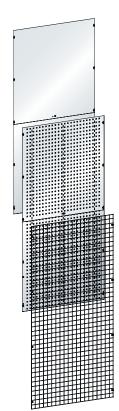

Rear panels, plain or perforated

The rear panel cover for shelving sections also stabilises the units lengthwise and is screwed to the shelf supports or side panels.

For perforated rear panel: Specification: 10×10 mm square holes and 38 mm divisions for holding keyhole hooks (see page 163). Including fastening material.

Specification: 2-part, sheet steel.

Colour: As per colour chart or galvanised.



Rear grating filling for shelf units. The rear gratings are screwed to the shelf supports or side panels. Including fastening material. Specification: Steel wire 3.0 mm.

Mesh size 50×50 mm, galvanised, blue chromated according to DIN 50961.

!	To stabilise the shelving systems lengthwise, diagonal or lengthwise braces must be used in addition to the perforated rear panel.

W-		850	1000	1300
ΗΛ		Art. no.	Art. no.	Art. no.
1100	Plain	45.600.XXX	45.601.XXX	46.410.XXX
1450	Plain	45.602.XXX	45.603.XXX	46.411.XXX
1800	Plain	45.604.XXX	45.605.XXX	45.606.XXX
2000	Plain	50.355.XXX	50.027.XXX	50.029.XXX
	Perforated	50.360.XXX	50.361.XXX	50.362.XXX
	Grating	50.423.000	50.424.000	50.425.000
2200	Plain	50.356.XXX	50.357.XXX	50.358.XXX
	Perforated	50.363.XXX	50.364.XXX	50.365.XXX
	Grating	50.426.000	50.427.000	50.428.000
2500	Plain	50.359.XXX	50.028.XXX	50.030.XXX
	Perforated	50.366.XXX	50.367.XXX	50.368.XXX
	Grating	50.429.000	50.430.000	50.431.000
3000	Plain	45.845.XXX	45.846.XXX	45.847.XXX
	Perforated	45.848.XXX	45.849.XXX	45.850.XXX
	Grating	45.851.000	45.852.000	45.853.000



Rear panel link piece is absolutely essential for all rear panels used in combination with shelf supports. Basic unit: 2 × width 80 mm and for each add-on unit 1 × width 120 mm. Specification: Steel sheet.


Colour: As per colour chart or galvanised.

W ->	80	120
Η <mark>↑</mark>	Art. no. 👋	Art. no. 🞇
1100	45.649.XXX	45.650.XXX
1450	45.651.XXX	45.652.XXX
1800	45.653.XXX	45.654.XXX
2000	50.369.XXX	50.370.XXX
2200	50.371.XXX	50.372XXX
2500	50.373.XXX	50.374.XXX
3000	45.854.XXX	45.855.XXX

Shelving systems I Universal shelving L1006, single components

3. Shelves, plain or slotted 🎍 Max. compartment load 80, 160, 220, 280 and 350 kg

Including floor anchor. Shelf thickness 25 mm. Specification: Steel sheet. Colour: As per colour chart or galvanised.



	D	7	300	350	400	500	600	800
W→	Shelf load		Art. no.					
	80	Plain	50.035.XXX	50.036.XXX	50.038.XXX	-	-	-
		Slotted	50.080.XXX	50.081.XXX	50.083.XXX	-	-	-
	160	Plain	55.737.XXX	50.037.XXX	50.039.XXX	50.041.XXX	50.044.XXX	50.047.XXX
050		Slotted	55.738.XXX	50.082.XXX	50.084.XXX	50.086.XXX	50.089.XXX	50.092.XXX
850	220	Plain	-	-	50.040.XXX	50.042.XXX	50.045.XXX	50.048.XXX
		Slotted	-	-	50.085.XXX	50.087.XXX	50.090.XXX	50.096.XXX
	280	Plain	-	-	-	50.043.XXX	50.046.XXX	50.049.XXX
		Slotted				50.088.XXX	50.091.XXX	50.097.XXX
		Plain	50.050.XXX	50.051.XXX	50.053.XXX	-	-	-
	80	Slotted	50.098.XXX	50.164.XXX	50.166.XXX	-	-	-
		Plain	55.739.XXX	50.052.XXX	50.054.XXX	50.056.XXX	50.059.XXX	50.062.XXX
	160	Slotted	55.741.XXX	50.165.XXX	50.167.XXX	50.169.XXX	50.172.XXX	50.175.XXX
4000	220	Plain	-	-	50.055.XXX	50.057.XXX	50.060.XXX	50.063.XXX
1000	220	Slotted	-	-	50.168.XXX	50.170.XXX	50.173.XXX	50.176.XXX
		Plain	-	-	-	50.058.XXX	50.061.XXX	50.064.XXX
	280	Slotted	-	-	-	50.171.XXX	50.174.XXX	50.177.XXX
	250	Plain	-	-	-	45.550.XXX	45.551.XXX	45.552.XXX
	350	Slotted	-	-	-	45.556.XXX	45.557.XXX	45.558.XXX
		Plain	50.065.XXX	50.066.XXX	50.068.XXX	-	-	-
	80	Slotted	50.178.XXX	50.179.XXX	50.181.XXX	-	-	-
	4.50	Plain	55.746.XXX	50.067.XXX	50.069.XXX	50.071.XXX	50.074.XXX	50.077.XXX
	160	Slotted	55.747.XXX	50.180.XXX	50.182.XXX	50.184.XXX	50.187.XXX	50.190.XXX
1300		Plain	-	-	50.070.XXX	50.072.XXX	50.075.XXX	50.078.XXX
	220	Slotted	-	-	50.183.XXX	50.185.XXX	50.188.XXX	50.191.XXX
	200	Plain	-	-	-	50.073.XXX	50.076.XXX	50.079.XXX
	280	Slotted	-	-	-	50.186.XXX	50.189.XXX	50.192.XXX







Stop bars for sloping shelves

The stop bars can be screwed front and back to the shelf supports or side panels. The shelves and stop bars can also be slotted in at an angle. Ideal for making material and parts available according to the FIFO principle.

Specification: Steel sheet. Colour: As per colour chart or galvanised.

W >	850	1000	1300
	Art. no. 🞇	Art. no. 🛚 🎇	Art. no. 🞇
	50.316.XXX	50.317.XXX	50.318.XXX

Max. angle of inclination of the shelves:

Depth $300 = 33^{\circ}$, $350 = 29^{\circ}$, $400 = 28^{\circ}$, $500 = 25^{\circ}$, $600 = 23^{\circ}$, $800 = 20^{\circ}$





Shelf labelling

Self-adhesive plastic label strips with hinged transparent protector, including labels. Width × height, 210 × 22 mm.

Sales units	Art. no.
10 pieces	18.931.000






Dividers

For subdividing slotted shelves. Specification: Steel sheet. Colour: As per colour chart or galvanised. Sales unit: 10 pcs.

D 7	300	350	400	500	600	800
Η↑	Art. no. 🞇	Art. no. 🛚 🐫	Art. no. 🞇	Art. no. 🛚 🐫	Art. no. 🛚 🐫	Art. no. 🛚 🎇
100	50.103.XXX	50.106.XXX	50.109.XXX	50.112.XXX	50.115.XXX	50.118.XXX
150	50.104.XXX	50.107.XXX	50.110.XXX	50.113.XXX	50.116.XXX	50.119.XXX
200	50.105.XXX	50.108.XXX	50.111.XXX	50.114.XXX	50.117.XXX	50.120.XXX



Shelf dividers

For subdividing slotted shelves. The height of the shelf dividers, slotted in at the top and the bottom, depends on the distance between the shelves. Clear shelf spacing = shelf divider height. Specification: Steel sheet. Colour: As per colour chart or galvanised. **Sales unit: 10 pcs.**

	D 7	300	350	400	500	600	800
Η <mark>↑</mark>		Art. no. 🔲	Art. no. 🛚 🐫	Art. no. 🛚 🐫	Art. no. 🎇	Art. no. 🛚 🐫	Art. no. 🔲
250		50.121.XXX	50.126.XXX	50.131.XXX	50.136.XXX	50.141.XXX	50.146.XXX
300		50.122.XXX	50.127.XXX	50.132.XXX	50.137.XXX	50.142.XXX	50.147.XXX
325		50.123.XXX	50.128.XXX	50.133.XXX	50.138.XXX	50.143.XXX	50.148.XXX
350		50.124.XXX	50.129.XXX	50.134.XXX	50.139.XXX	50.144.XXX	50.149.XXX
400		50.125.XXX	50.130.XXX	50.135.XXX	50.140.XXX	50.145.XXX	50.150.XXX

Shelving systems I Universal shelving L1006, single components



Shelf front cover strip

For storing bulk goods and small parts. Is screwed to the shelf supports or side panels. Including fastening material. Specification: Steel sheet. Colour: As per colour chart or galvanised.

	W >	850	1000	1300
Η		Art. no. 🛚 🐫	Art. no. 🛚 🎇	Art. no. 🛚 🐫
75		50.435.XXX	50.436.XXX	50.437.XXX





Drawers

Smooth-running drawers with full extension for ideal storage of small parts and tools. Load capacity 50 kg. Specification: Steel sheet. Colour: As per colour chart, **not available in galvanised version**.

$W \rightarrow D 7$	1000×350	1000×500
Η ↑	Art. no. 🛚 🎇	Art. no. 🛚 🎇
75	55.165.XXX	55.172.XXX
100	55.166.XXX	55.173.XXX
150	55.167.XXX	55.174.XXX
LISTA units	54 × 18 E	54 × 27 E
Useable drawer size (W × D mm)	918 × 306	918 × 459





Drip trays

Can be placed loose on the shelves with a shelf width of 1,000 mm. Can also be removed if hinged doors are used. Specification: Height 100 mm, chromium steel. Material thickness: 2 mm. Welded liquid-tight. Designed according to Section 19 WHG (German Water Resources Act) / StawaR (German directive on steel trays). The drip tray is leak-tested and has a data plate to that effect as well as a test certificate.

	300	350	400	500	600	800
W ->	Art. no.					
1000	53.823.000	53.828.000	53.824.000	53.825.000	53.826.000	53.827.000
Capacity in litres	26	32	36	45	54	72




Pull-out shelf

Load capacity 50 kg. Model: sheet steel. Colour: as per colour chart, not available in galvanised version.

	W->	850	1000	1300
		757	907	1207
D 7		Art. no. 🛚 🐫	Art. no. 🛚 🐫	Art. no. 🛚 🐫
350	332	46.370.XXX	46.371.XXX	46.372.XXX
400	382	46.373.XXX	46.374.XXX	46.375.XXX
500	482	46.376.XXX	46.377.XXX	46.378.XXX






Pull-out suspension filing frame

Suitable for A4 suspension files. Max. load capacity 50 kg. Specification: Steel sheet. Colour: As per colour chart, not available in galvanised version.

	W->	850	1000	1300
D 7		Art. no. 🛚 🐫	Art. no. 🛚 🎇	Art. no. 🛚 🐫
350		50.441.XXX	50.444.XXX	50.446.XXX
400		50.442.XXX	50.445.XXX	50.447.XXX
500		50.443.XXX	50.156.XXX	50.448.XXX





Lateral profiles

C700.16 for storage system: Vetro lateral file A4 landscape (985 × 450 A4 lateral and folio)

C700.17 for storage system: Datox EDP files, Monopendex files, ELBA centre point suspension files 91460, Leitz suspension files, Eichner suspension files. Specification: Steel sheet. Colour: Grey, NCS S 2502-R. Including fastening material.

	W->	850	1000	1300
D 7	version	Art. no.	Art. no.	Art. no.
350	C700.16	35.143.000	32.559.000	50.154.000
350 —	C700.17	35.149.000	32.581.000	50.157.000
500	C700.16	35.147.000	32.578.000	50.155.000
500	C700.17	35.153.000	32.599.000	50.158.000





C700.16

C700.17





Centre partition

For vertically subdividing complete shelf units with a depth of 500 mm. The centre divider is fixed in place by the shelves. Width 30 mm. Height of centre divider = shelf unit height -25 mm. Specification: Steel sheet. Colour: As per colour chart or galvanised.




Select the top shelf so that it fits over the entire width of the shelving unit. Further assembly of the shelving units takes place with shelves for the centre partition.



Plain shelves, smooth, for centre divider

Including floor anchor. Shelf thickness 25 mm. Unit load 80 kg. Specification: Steel sheet. Colour: As per colour chart or galvanised.


	W->	425	500	650
D 7		Art. no. 🛚 🐫	Art. no. 🛚 🐫	Art. no. 🛚 🐫
500		50.325.XXX	50.326.XXX	50.327.XXX



Clothes rail for centre divider

The clothes rails are fitted by means of crossbar plates and shelf supports. Specification: Rail made of anodised aluminium, Ø 27 mm, crossbars in sheet steel. Load capacity 50 kg. Colour of the crossbars: As per colour chart or galvanised.

W->	425	500	650
D 7	Art. no. 🛚 🐫	Art. no. 🛚 🐫	Art. no. 🛚 🐫
500	50.495.XXX	50.496.XXX	50.497.XXX



Clothes rail

The clothes rails are fitted by means of crossbar plates and shelf supports. Specification: Rail made of anodised aluminium, Ø 27 mm, crossbars in sheet steel. Load capacity 50 kg. Colour of the crossbars: As per colour chart or galvanised.

	W->	850	1000	1300
D 7		Art. no. 🛚 👯	Art. no. 🛚 🐫	Art. no. 🛚 🞇
400		50.498.XXX	50.502.XXX	50.506.XXX
500		50.499.XXX	50.503.XXX	50.507.XXX
600		50.500.XXX	50.504.XXX	50.508.XXX
800		50.501.XXX	50.505.XXX	50.509.XXX



Organising rail

For vertical storage, compartment division and for storing various materials in rings (cables, vee belts and tubing). The crossbars are screwed to the shelf supports or side panels. Load capacity 50 kg. The brackets are screwed to the crossbar. Including fastening material. Specification: Steel sheet. Colour: As per colour chart, **not available in galvanised version.**

Crossbars

W->	850	1000	1300	
	Art. no. 🛚 🐫	Art. no. 🛚 🐫	Art. no. 🛚 🞇	
	50.486.XXX	50.487.XXX	50.488.XXX	

Brackets

D 7	300	350	400	500	600	800
	Art. no. 🛚 🐫	Art. no. 🛚 🞇	Art. no. 🛚 🎇	Art. no. 🛚 🐫	Art. no. 🛚 🎇	Art. no. 🛚 🐫
	50.489.XXX	50.490.XXX	50.491.XXX	50.492.XXX	50.493.XXX	50.494.XXX



Pair of tyre shelf levels

Screwed together with the shelf supports. Model: sheet steel, galvanised.

W ->	Shelf load kg	Model	Cod. art
1000	160	per pair	46.028.222
1300	160	per pair	46.029.222

Shelving systems I Universal shelving L1006, single components

5. Hinged doors

Hinged with a 2-point bar lock with a recess for a clasp lock (must be ordered separately). The hinged doors can also be retrofitted to all shelf units. Specification: Steel sheet. Colour: As per colour chart, not available in galvanised version. Shelving depth with hinged door = shelving depth side panel/pair of shelf supports +30 mm



		Shelf supports			Side panel			
	W->	850	1000	1300	850	1000	1300	
Η <mark>↑</mark>		Art. no. 🞇	Art. no. 👋	Art. no. 🞇	Art. no. 👋	Art. no. 🞇	Art. no. 🞇	
1100		46.412.XXX	46.413.XXX	46.414.XXX	45.631.XXX	45.632.XXX	46.421.XXX	
1450		46.415.XXX	46.416.XXX	46.417.XXX	45.633.XXX	45.634.XXX	46.422.XXX	
1800		46.418.XXX	46.419.XXX	46.420.XXX	45.635.XXX	45.636.XXX	46.423.XXX	
2000		50.472.XXX	50.473.XXX	50.474.XXX	50.467.XXX	50.160.XXX	50.162.XXX	
2200		50.475.XXX	50.476.XXX	50.477.XXX	50.468.XXX	50.469.XXX	50.470.XXX	
2500		50.478.XXX	50.479.XXX	50.480.XXX	50.471.XXX	50.161.XXX	50.163.XXX	



Cover profile with supports

Basic unit: $2 \times$ cover profile and for each add-on unit $1 \times$ cover profile. Specification: sheet steel.Colour: As per colour chart, not available in galvanised v

version.						
Η↑	1100	1450	1800	2000	2200	2500
4	46.424.XXX	46.425.XXX	46.426.XXX	45.740.XXX	45.741.XXX	45.742.XXX



+ Clasp lock

Art. no. 🞇

KEY Lock, 49.060.000 separately lockable **CODE Lock** 49.085.000 RFID Lock 49.086.000





Cover profile for hinged doors is absolutely essential for all hinged doors used

in combination with shelf supports.

+ Clasp lock cover (optional)

Rear clasp lock cover for a more attractive appearance. Specification: sheet steel.Colour: As per colour chart.

45.868.XXX



Two shelving sections are closed with each sliding door. Running smoothly and quietly on castors: In a runner and guide rail which are fastened to the shelf supports at the bottom and/or at the top. Lockable with a lock-down cylinder lock. The lock must be ordered separately. The doors can be opened wide enough for one entire shelving unit to be freely accessible. The sliding doors can also be fitted later. Specification: Steel sheet. Colour: As per colour chart, not available in galvanised version. Shelving depth with hinged door = shelving depth side panel/pair of shelf supports +105 mm



		Shelf supports			Side panel			
W->	2×850	2×1000	2×1300	2×850	2×1000	2×1300		
H 1	Art. no. 🛚 🎇	Art. no. 🛚 🐫	Art. no. 🛚 🞇	Art. no. 🛚 🐫	Art. no. 🛚 🐫	Art. no. 🛚 🐫		
2000	50.458.XXX	50.459.XXX	50.460.XXX	50.449.XXX	50.450.XXX	50.451.XXX		
2200	50.461.XXX	50.462.XXX	50.463.XXX	50.452.XXX	50.453.XXX	50.454.XXX		
2500	50.464.XXX	50.465.XXX	50.466.XXX	50.455.XXX	50.456.XXX	50.457.XXX		

+ Lock-down cylinder lock

KEY Lock, 55.438.000 separately lockable






1000 2×1000

6. Add-on elements for "Office"



Sideboard







						.000	
					Actual width mm	1047	2047
D 7	Actual depth mm	mm	Number shelves	Actual height mm		Art. no.	Art. no. 🛚 👯
			1132		Multiplex	45.975.XXX	45.976.XXX
		1100	1100 3	1124	Resin	45.977.XXX	45.978.XXX
350	50 395 1450	1450 4	1450 4	1482	Multiplex	45.979.XXX	45.980.XXX
		1450		1474	Resin	45.981.XXX	45.982.XXX
		1100		1132	Multiplex	45.983.XXX	45.984.XXX
400	445	1100 3	1124	Resin	45.985.XXX	45.986.XXX	
400	445	1450		1482	Multiplex	45.987.XXX	45.988.XXX
		1450 4	4	1474	Resin	45.989.XXX	45.990.XXX
					Shelf load (kg)	80	80




Cover panel, resin-coated, thickness 22 mm

Surface and edging light grey, NCS S 1500-N, laminated chipboard (quality class E1), with melamine coating on both sides (manufactured according to standard EN 14322). 2 mm thick plastic edging on all sides. Including double-sided adhesive tape.



Multiplex cover panel, thickness 30 mm

Made of steamed beech veneers, glued in multiple layers and waterproof (DIN 68 705), bevelled edges, sanded, oiled and waxed surface. The panel is splash-proof, dirt-repellent and largely impervious to oil and grease. Including double-sided adhesive tape.

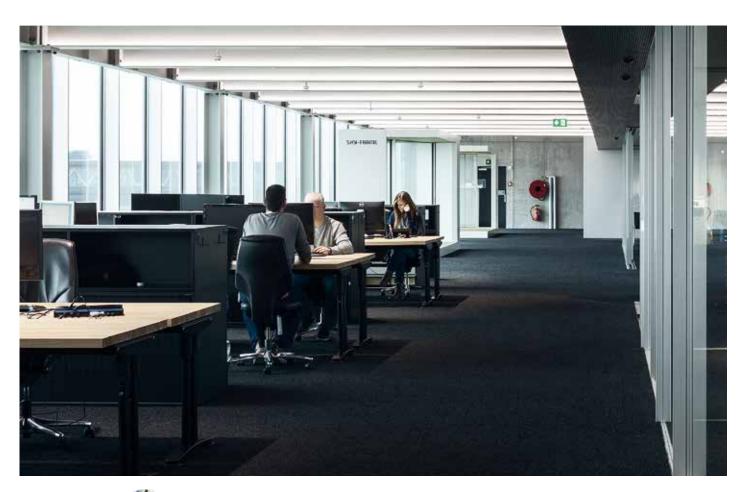


Shelving systems I Heavy-duty pull-out shelving systems







Dimensions and load capacities

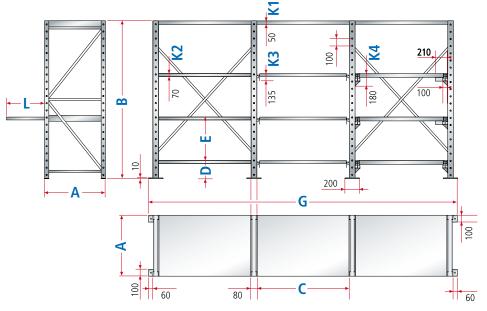

Lengthwise pallet storage



Crosswise pallet storage



Pallet type	Width mm	Depth mm	Height mm
I	800	1200	150
II	1200	800	150
III	1200	1000	150
IIII	1000	800	150

A = Shelving depth

B = Shelving height **C** = Shelving width

D = Minimum distance from floor

E = Minimum distance top edge to top edge G = Number of installation widths + number of side frame widths 80 mm + external base plate widths 60 mmExample: $G = 3 \times 1090 \text{ mm} + 4 \times 80 \text{ mm} + 2 \times 60 \text{ mm} = 3710 \text{ mm}$

K1...K4 = Installation heights

Shelving depths (A)

D 7 Installed dimensions mm	860	1060	1260
Extension depths (L) mm			
Part extension, 65% extension	510	650	810
Full extension, ~ 100 % extension	790	990	1190

Shelf widths (C)

M Installed dimensions mm	890	1090	1290
Side frame width	80	80	80
Base plate width	200	200	200

Load capacities


Installed dimensions mm		860	1060	1260		
Number of pull- out frames	Fixed frame Number	Max. load capacity per pull-out or fixed frame				
1 to 5	-	1000	900	800		
1 to 6	-	900	900	800		
1 to 7	-	800	800	800		
1 to 8	-	700	700	700		
1 to 9	-	600	600	600		
-	1 to 9	1000	900	800		
1 to 3	1 to 6	1000	900	800		
1 to 5	1 to 4	800	800	800		
Max. load capacity per top shelf		200	150	100		

The maximum load capacities specified must not be exceeded. The load capacities apply only to an evenly distributed load. The maximum load capacity per shelving unit is 9000 kg. Only one pull-out frame per shelving unit may be pulled out.

Shelving heights (B)

H		1500	2000	2200	2500	
Installation heights (K)						
Top shelf	K1	50 mm				
Fixed frame	K2	70 mm				
Part extension frame	К3	135 mm				
Full extension frame	K4	180 mm				
Vertical installation distances						

Vertical installation distances			
-	105 mm for fixed frame		
Distance from floor (D)	165 mm for part extension frame		
	215 mm for full extension frame		
	100 mm for fixed frame		
Minimum distance (E) top edge	200 mm for full extension and part extension frame		
	300 mm for full extension frame with sheet metal cover		
Hole spacing	every 100 mm		



Diagonal brace arrangement

the load capacities only apply when, for 6 shelf units or more, 2 shelf units or at least every fifth shelf unit is fitted with rear panels or 1 diagonal brace per 3 units.



Anchoring rule

Heavy-duty pull-out shelving units must always be anchored.



Optimum use of space for very heavy storage items







Pallet storage

 space-saving pallet storage with a load capacity of up to 1000 kg in fixed frames

Heavy-duty pull-out shelving systems 🖥 9000, disassembled

With 2 pull-out frames for part extension (PE, 65% extension) and 1 fixed frame as top shelf, each including chipboard inserts, 40 mm thick. Can be fitted with side panels, further pull-out and fixed frames, metal covers, siding doors, roller shutters and column guard. Basic unit including 1 diagonal brace for lengthwise stability, 2 side frames, floor anchor and levelling plate set. Add-on unit including 1 side frame, floor anchor and levelling plate set. Hole spacing in the side frame every 100 mm. Specification: steel sheet. Colour: as per colour chart.

Note: from the third add-on unit, an additional diagonal brace is required (see p. 242).







Heavy-duty pull-out shelves up to 1000 kg

- for storing large, heavy single items and equipment
- flush storage achieved by placing sheet metal covers on top or inserting chipboard inserts





D	W→	Pull-out frames	Fixed frames	Shelf load	Max. load per unit	Basic unit Art. no.	Add-on unit Art. no. 👋
860	890	2	1	1000	9000	71.530.XXX	71.534.XXX
860	1290	2	1	1000	9000	71.532.XXX	71.536.XXX



1260	890	2	1	800	9000	71.531.XXX	71.535.XXX	
1260	1290	2	1	800	9000	71.533.XXX	71.537.XXX	

Shelving systems | Heavy-duty pull-out shelving systems side frames, stabilisation



Side frames

Side frames are perforated at intervals of 100 mm to allow installation of top shelves, fixed and pull-out frames. Front and back columns are welded together with horizontal and diagonal braces to form a rigid frame. Specification: sheet steel pressed profiles. Colour: as per colour chart.

Caution: four floor anchors are required per side frame.

Installed dimensions mm	D 7	860	1060	1260
Side frames				
Η <mark>↑</mark>	W→	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
1500	80	73.000.XXX	73.010.XXX	73.020.XXX
2000	80	73.001.XXX	73.011.XXX	73.021.XXX
2200	80	73.002.XXX	73.012.XXX	73.022.XXX
2500	80	73.003.XXX	73.013.XXX	73.023.XXX

Side frame cover

For covering the top of the side frames. Specification: sheet steel. Colour: according to colour chart.

for shelving depth mm	W	860	1060	1260
		Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
Side frame cover		73.590.XXX	73.591.XXX	73.592.XXX

Side panels

The side panels and the side frame columns are screwed together. The standard side panels are used for the roller shutter structure. Includes screw fixtures. Specification: sheet steel 1.5 mm. Colour: according to colour chart.

for shelving depth mm	W 7	860	1060	1260
Side panels H 1500		Art. no. %	Art. no. <i></i>	Art. no. * ** 73.520. XXX
2000		73.501.XXX	73.511.XXX	73.521.XXX
2200		73.502.XXX	73.512.XXX	73.522.XXX
2500		73.503.XXX	73.513.XXX	73.523.XXX



Side frame connections

Screwed to the side frames at the front and rear. Including screw fasteners. Specification: flat steel. Colour: as per colour chart.

Per pair		73.060.XXX	73.061.XXX	73.062.XXX
Side frame connection	ns	Art. no. 🞇	Art. no. 🎇	Art. no. 🞇
		050	1030	1230
Installed dimensions mm	$W \rightarrow$	890	1090	1290



Diagonal braces

Used instead of rear panels to stabilise units lengthwise. Including screw fasteners. Specification: Steel, galvanised. Number of diagonal braces: see planning notes p. 240.

O	r		

Diagonal braces

Art. no.	Art. no.	Art. no.
73.100.000	73.110.000	73.120.000
73.101.000	73.111.000	73.121.000
73.102.000	73.112.000	73.122.000
73.103.000	73.113.000	73.123.000
	73.100.000 73.101.000 73.102.000 73.103.000	73.100.000 73.110.000 73.101.000 73.111.000 73.102.000 73.112.000 73.103.000 73.113.000



Rear panels

The rear panel cover for shelving sections also stabilises the units lengthwise and is screwed to the side frames with the columns. Including fastening material. Specification: steel sheet.

Colour: as per colour chart.

Rear panels		A	
Η <mark>↑</mark>	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
1500	73.530.XXX	73.540.XXX	73.550.XXX
Number of parts/dimensions mm	1×1000, 1×500	1×1000, 1×500	1×1000, 1×500
2000	73.531.XXX	73.541.XXX	73.551.XXX
Number of parts/dimensions mm	2×1000	2×1000	2×1000
2200	73.532.XXX	73.542.XXX	73.552.XXX
Number of parts/dimensions mm	1×1000, 2×600	1×1000, 2×600	1×1000, 2×600
2500	73.533.XXX	73.543.XXX	73.553.XXX
Number of parts/dimensions mm	2×1000, 1×500	2×1000, 1×500	2×1000, 1×500
Actual width mm	1000	1200	1400







Levelling plates

To compensate for height. Enable units to be aligned with precision on uneven floors. Specification: PVC. Colour: grey.



Thickness 1 mm	73.005.000
Thickness 2 mm	73.006.000
Thickness 4 mm	73.007.000
Dimensions (W × D mm)	100×200





Floor anchoring

Heavy-duty pull-out shelving units must always be anchored.

Floor anchor

112.991.000 M10 \times 130, each



Column guard PC6

Safety feature to protect exposed side frames. With 4 holes for floor anchoring. Including 4 segment anchors M12×140 mm (drill hole depth 140 mm). Specification: sheet steel, St 37-2. Colour: yellow/black.

Column guard PC6

W $166 \times D$ $166 \times H$ 32243.537.000



In order to comply with regulations, and for safety reasons, heavy-duty pull-out units must consist of at least these elements



Shelving systems I Heavy-duty pull-out shelving systems fixed and pull-out frames



Fixed frame

Instead of the top shelves, fixed frames can also be used. The fixed frames are screwed to the side frames. Including screw fasteners. Specification: Pressed profile, welded. Colour: as per colour chart.

ions mm	860	1060	1260
Usable depth mm	840	1040	1240
Usable width mm	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
860	73.030.XXX	73.031.XXX	73.032.XXX
1060	73.040.XXX	73.041.XXX	73.042.XXX
1260	73.050.XXX	73.051.XXX	73.052.XXX
g)	1000	900	800
	Usable depth mm Usable width mm 860 1060 1260	Usable depth mm 840 Usable width mm 860 73.030.XXX 1060 73.040.XXX 1260 73.050.XXX	Usable depth mm 840 1040 Usable width mm Art. no. Art. no. 860 73.030.XXX 73.031.XXX 1060 73.040.XXX 73.041.XXX 1260 73.050.XXX 73.051.XXX



Metal sheet covers for fixed frames

Placed on loosely. Locked in place with a bent section at the front and rear and a stop bracket welded on at the rear. Specification: steel sheet, 2 mm thick. Colour: as per colour chart.

Metal sheet covers for fixed frames

W->	Usable width mm	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
890	860	73.130.XXX	73.131.XXX	73.132.XXX
1090	1060	73.140.XXX	73.141.XXX	73.142.XXX
1290	1260	73.150.XXX	73.151.XXX	73.152.XXX



Chipboard inserts for fixed frames

2-piece, to be inserted into the fixed frames. Specification: chipboard, 40 mm thick.

Chipboard inserts for fixed frames

W->	Usable/actual width mm	Art. no.	Art. no.	Art. no.
890	860 / 869	73.430.000	73.431.000	73.432.000
1090	1060 / 1069	73.440.000	73.441.000	73.442.000
1290	1260 / 1269	73.450.000	73.451.000	73.452.000
Actual de	pth mm (2-part)	345	445	545

or...



Pull-out frames for part extension

Part extension (PE), 65% extension. The pull-out stop secures the pull-out frame in both closed and open positions. The runners are screwed to the side frames. Including screw fasteners. Specification: Pressed profile, welded. Colour: as per colour chart.

Installed dimens	ions mm	860	1060	1260
	Usable depth mm	810	1010	1210
Pull-out frames for part extension				
W ->	Usable width mm	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
890	800	73.070.XXX	73.071.XXX	73.072.XXX
1090	1000	73.080.XXX	73.081.XXX	73.082.XXX
1290	1200	73.090.XXX	73.091.XXX	73.092.XXX
Load capacity (k	g)	1000	900	800



Metal sheet covers for pull-out frames (part extension)

With raised edge on 3 sides, 30 mm high, placed on loosely. Locked in place with a bent section at the front and a stop bracket welded on at the rear. Specification: steel sheet, 2 mm thick. Colour: as per colour chart.

Metal sheet covers for pull-out frames (part extension)

W→	Usable width mm	Art. no. 🞇	Art. no. 🔲	Art. no. 🛚 🐫
890	800	73.270.XXX	73.271.XXX	73.272.XXX
1090	1000	73.280.XXX	73.281.XXX	73.282.XXX
1290	1200	73.290.XXX	73.291.XXX	73.292.XXX



Chipboard inserts for pull-out frames (part extension)

2-piece, to be inserted into the pull-out frames for part extension. Specification: chipboard, 40 mm thick.

Chipboard inserts for pull-out frames (part extension)

W->	Usable/actual width mm	Art. no.	Art. no.	Art. no.
890	800 / 772	73.470.000	73.471.000	73.472.000
1090	1000 / 972	73.480.000	73.481.000	73.482.000
1290	1200 / 1172	73.490.000	73.491.000	73.492.000
Actual de	pth mm (2-part)	330	430	530

!

In order to comply with regulations, and for safety reasons, heavy-duty pull-out shelving systems must consist of at least these elements.



or...



Pull-out frames for full extension

Full extension (FE), 100% extension. The pull-out stop secures the pull-out frame in both closed and open positions. The runners are screwed to the side frames. Including screw fasteners. Specification: Pressed profile, welded. Colour: as per colour chart.



Metal sheet covers for pull-out frames (full extension)

With raised edge on 3 sides, 30 mm high, placed on loosely. Locked in place with a bent section at the front and a stop bracket welded on at the rear. Specification: steel sheet, 2 mm thick. Colour: as per colour chart.



Chipboard inserts for pull-out frames (full extension)

 $\ensuremath{\text{2-piece}}$, to be inserted into the pull-out frames for full extension. Specification: chipboard, 40 mm thick.



Top Shelves

Cover the top of the side frames and provide protection from dust. Fitting material included. Specification: sheet steel. Colour: according to colour chart.



Roller shutter including top shelf

Pre-assembled roller shutter housing. Roller shutter guided in vertical profiles on side frame. With recess for lever tumbler lock. For initial assembly, including top shelf, pre-drilled, for attaching the roller shutter housing. Description: roller shutter housing and guide profiles made of sheet steel. Colours: according to colour chart. Roller shutter with plastic slats. Colour: pale grey, RAL 7035. Note: the height of the shelving is increased by 323 mm due to the design.

Installed dimen	sions mm D 7	860	1060	1260
	Usable depth mm	810	1010	1210
Pull-out frames for full extension				
W→	Usable width mm	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
890	800	73.210.XXX	73.211.XXX	45.008.XXX
1090	1000	73.212.XXX	73.213.XXX	73.214.XXX
1290	1200	45.009.XXX	73.215.XXX	73.216.XXX
Load capacity (I	(g)	1000	900	800

Metal sheet covers for pull-out frames (full extension)

W->	Usable width mm	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
890	800	73.217.XXX	73.218.XXX	45.250.XXX
1090	1000	73.219.XXX	73.220.XXX	73.221.XXX
1290	1200	45.251.XXX	73.222.XXX	73.223.XXX

Chipboard inserts for pull-out frames (full extension)

W->	Usable/actual width mm	Art. no.	Art. no.	Art. no.
890	800 / 680	73.224.000	73.225.000	45.252.000
1090	1000 / 880	73.226.000	73.227.000	73.228.000
1290	1200 / 1080	45.253.000	73.229.000	73.230.000
Actual de	pth mm (2-part)	330	430	530

Installed dimension	ns mm D 7	860	1060	1260
	Usable depth mm	840	1040	1240
Top Shelves	·			
W→	Usable width mm	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
890	890	73.650.XXX	73.651.XXX	73.652.XXX
1090	1090	73.660.XXX	73.661.XXX	73.662.XXX
1290	1290	73.670.XXX	73.671.XXX	73.672.XXX
Load capacity (kg)		200	150	100

Installed dimensions mm	D 7	860	1060	1260
Roller shutter including	top shelf			
H 1	W->	Art. no. 🞇	Art. no. 🞇	Art. no. 🞇
2000	890	73.231.XXX	73.232.XXX	73.233.XXX
	1090	73.240.XXX	73.241.XXX	73.242.XXX
	1290	73.249.XXX	73.250.XXX	73.251.XXX
2200	890	73.234.XXX	73.235.XXX	73.236.XXX
	1090	73.243.XXX	73.244.XXX	73.245.XXX
	1290	73.252.XXX	73.253.XXX	73.254.XXX
2500	890	73.237.XXX	73.238.XXX	73.239.XXX
	1090	73.246.XXX	73.247.XXX	73.248.XXX
	1290	73.255.XXX	73.256.XXX	73.257.XXX


+ lever tumbler lock

KEY Lock, Separately lockable 49.090.000



Shelving systems I Mobile shelf units


A LISTA mobile shelving system is the perfect way to create plenty of storage space in confined areas. When more space is needed in existing premises, LISTA has the perfect solution: create more space without extending. Fixed shelf units are needed only if simultaneous access to all stored items is necessary; otherwise, aisles between shelf units are simply uneconomical. Instead of many space-consuming service aisles between the fixed shelf units, only one single aisle is needed to provide access to all shelving.

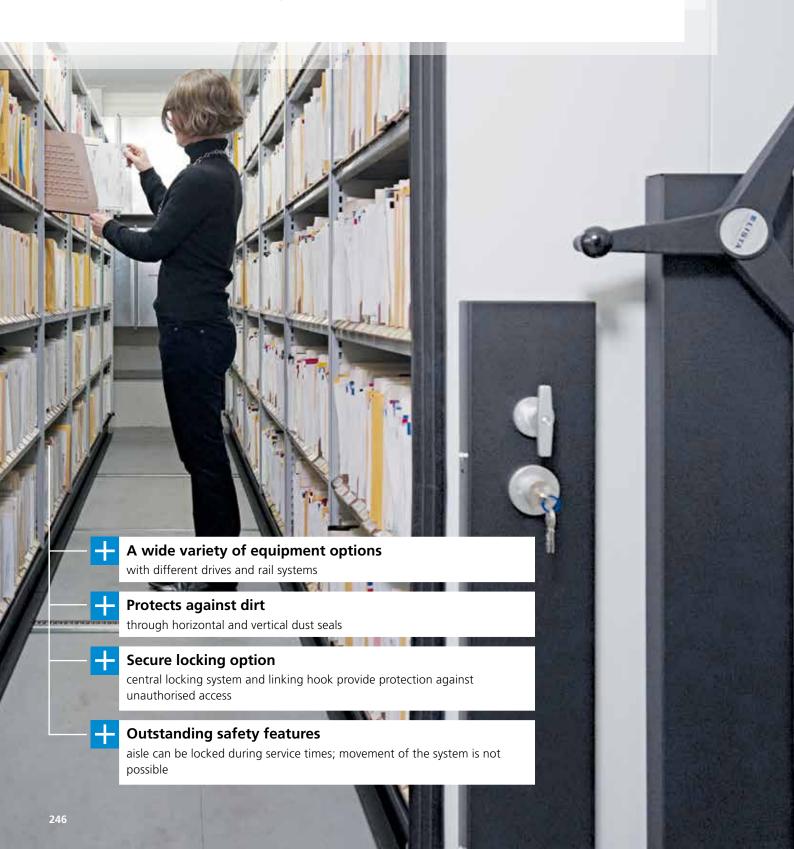



■ Benefits of LISTA mobile shelf units

Conventional storage




30 shelving units each providing 6 shelf metres = **180 shelf metres.**

Storage with mobile shelf units



54 shelving units each providing 6 shelf metres = **324 shelf metres.**

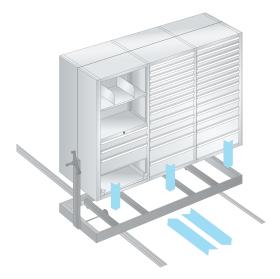

Flexible range of applications

LISTA offers suitable storage solutions for all types of stored goods. Universal and drawer storage walls are perfectly suited for use with mobile substructures. LISTA planning specialists utilise the many options offered by the mobile shelf unit system. Every organisation detail is managed according to your requirements — from the design to the turnkey installation of your system.



Universal shelving L1006 R Design "Solid sheet side panel"

Diagonal braces or rear panels ensure stability. Depending on the dimensions and specification, shelves have a load capacity between 80 and 280 kg. The maximum load-bearing capacity of a shelving unit is about 500 kg.

For more information on universal shelving systems see page 220.



Universal shelving L1006 Design "shelf supports"

Suitable for bulky or heavy stored goods. They provide optimum air circulation thanks to their open design. Stability is ensured by diagonal braces or rear panels. Depending on their dimensions, the shelves have a load capacity between 80 and 280 kg. Maximum load capacity per shelving unit up to 1000 kg.

For more information on universal shelving systems see page 220.



Drawer storage walls

The drawer options for small parts or tools are virtually unlimited. The many drawer sizes together with the large range of partition components provide a flexible and adaptable basis for optimum and material-friendly storage.

For more information on drawer storage walls, see page 84.

SYSTEMATIC ORGANISATION


LISTA drawer partition materials create systematic order for all industries and all requirements. From small parts to NC tools, our plastic boxes, troughs, metal dividers and more provide flexible solutions for practically any kind of storage item. The results speak for themselves: because systematic organisation means less time searching for stored items, simplified workflows and efficient results.



with preconfigured sets and freely combinable individual elements such as slotted partitions, metal dividers, plastic boxes, troughs, etc.

- Fully combinable
 with the entire LISTA range thanks to the standardised
 unit of measure
- the walls surrounding the interior of the drawers have a slotted grid and the bottoms of the drawers are perforated for the insertion and attachment of slotted partitions, metal dividers, milling cutter holders and holding pins
- Professional labelling
 with LISTA Script labelling software for labels, clip-on label holders and barcode holders



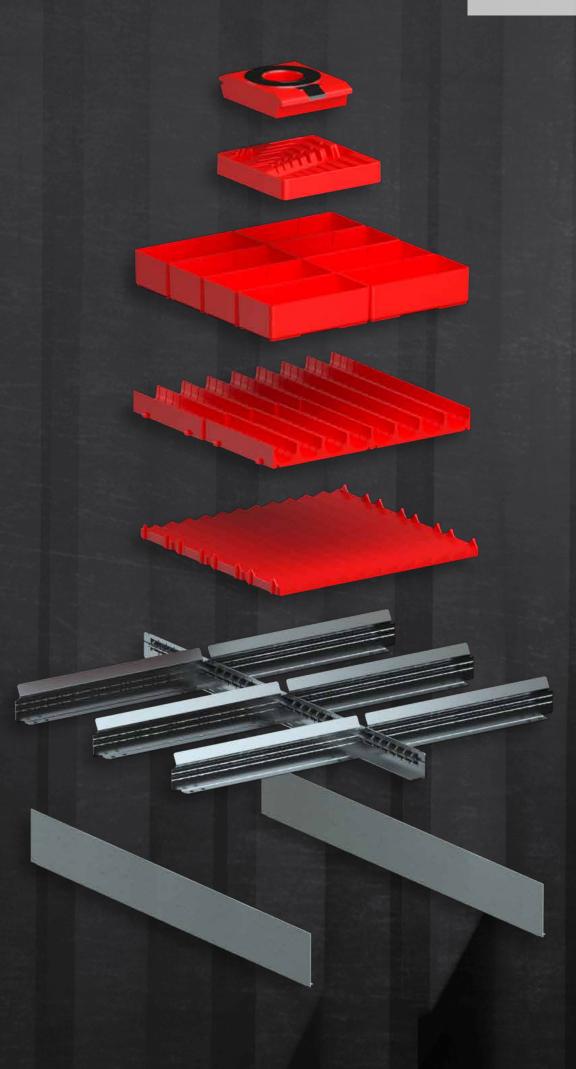

One system, many different options

Thanks to the LISTA Unit measuring system, our partition materials can be freely combined and are compatible with the entire LISTA range. This means that you have the ideal storage system for your particular storage items — either as individual parts or as a preconfigured set.


The LISTA Unit (E) – the clever measurement system

Using a practical grid system, the LISTA unit (E) ensures that housings, drawers and partition materials always fit neatly together. A LISTA unit (E) is 17 mm and is based on the grid system for partitioning drawers. Drawer cabinet housings and the drawers that fit into this housing are based on the same LISTA Units, even though they have different dimensions.

Determining the right partition material:

- 1. Determine the drawer size in LISTA Units (E)
- 2. Determine the dimensions of the set or the individual parts in LISTA Units (E)
- 3. The sum in Units of the individual parts must not exceed the sum in Units of the drawer(s)

Take the usable height of the drawer into account according to the goods to be stored.



For more information, see fold-out.





₩ide range of specifications in a modular system





Plastic boxes

- perfect for small parts of various sizes
- also available in ESD





Troughs

- for cylindrical items
- can be divided lengthwise as desired
- also available in ESD





Slotted partitions and metal dividers


- for flexible partitioning
- for parts of different sizes





Holding pins and non-slip mats

ideal for larger items





Foam inserts with blue underlays

- protects tools and other items and keeps them organised
- hold items firmly in place in the drawer





NC tool holders

for neat and orderly storage of NC items





LISTA Script

- clip-on label holders for plastic boxes, troughs and metal dividers
- helps you keep an overview of your inventory and can easily be read by a barcode scanner



LISTA Script see p. 268





For NC storage and transport systems see p. 100

You can find our LISTA Script labelling software on our **website** under **Products** Accessories > The entire LISTA range can be found online at www.lista.com.

18×27 F



306×459 mm




Troughs

For front height mm	Art. no.
50	80.377.000
6 troughs:	4-piece, Ø 33 mm*
30 trough dividers:	4-piece, Ø 33 mm*



Troughs

For front height	Art. no.
50	80.378.000
6 troughs:	3-piece, Ø 45 mm*
20 trough dividers:	3-piece, Ø 45 mm*





Troughs

mm	Art. no.	
50	80.379.000	
6 troughs:	2-piece, Ø 70 m	
20 trough dividers	2-niece Ø 70 m	



Plastic boxes

For front height mm	Art. no.	
50	80.372.000	
75	80.414.000	
24 plastic boxes:	75×75 mm	



Plastic boxes

80.412.00
80.368.00
Art. no.

4 plastic boxes: 75 × 150 mm



Plastic boxes


For front height mm	Art. no.
50	80.370.000
75	80.413.000
8 plastic boxes: 4 plastic boxes: 2 plastic boxes:	75 × 75 mm 75 × 150 mm 150 × 150 mm



Slotted partitions and metal dividers

For front height mm	Art. no.	
50	80.639.000	
75	80.640.000	
100	80.641.000	
150	80.642.000	

2 slotted partitions: 27 E 6 metal dividers: 6 E



Slotted partitions and metal dividers

For front height mm	Art. no.	
50	80.643.000	
75	80.644.000	
100	80.645.000	
150	80.646.000	
200	80.647.000	
300	80.648.000	

1 slotted partition: 27 E 2 metal dividers: 9 E







459 × 459 mm



Troughs	
For front height mm	Art. no.
50	80.656.000
9 troughs: 40 trough dividers:	4-piece, Ø 33 mm* 4-piece, Ø 33 mm*



Troughs For front height mm	Art. no.
50	80.657.000
9 troughs:	3-piece, Ø 45 mm*

* Take the usable height of the drawer into account according to the goods to be stored.



Troughs For front height

50	80.658.000	
9 troughs:	2-piece, Ø 70 mm*	
20 trough dividers:	2-piece, Ø 70 mm*	

Art. no.



Plastic boxes

For front height mm 50 75	Art. no. 80.659.000	
	24 plastic boxes:	75×75 mm
6 plastic boxes:	150 × 75 mm	



Plastic boxes

For front height mm	Art. no.	
50	80.661.000	
75	80.662.000	
100, 125	80.663.000	
18 plastic boxes:	150 × 75 mm	



Plastic boxes

For front height mm	Art. no.
50	80.664.000
75	80.665.000
100, 125	80.666.000
9 nlastic hoves	150 × 150 mm



Slotted partitions and metal dividers

For front height mm	Art. no.
50	80.667.000
75	80.668.000
100, 125	80.669.000
150	80.670.000


3 slotted partitions: 27 E 9 metal dividers: 6 E 2 metal dividers: 9 E



Slotted partitions and metal dividers

For front height mm	Art. no.	
50	80.671.000	
75	80.672.000	
100, 125	80.673.000	
150	80.674.000	
200	80.675.000	
250	80.676.000	
300	80.677.000	

2 slotted partitions: 27 E 6 metal dividers:




Dividers

For front height mm	Art. no.
75	100.315.000
100, 125	100.130.000
150	100.131.000
200	100.132.000
250	100.133.000
2 dividers:	27 E

Note

The front height is the same as the height of the drawer front. For the actual height of the partition material see p. 262–265.

Partition material sets excluding clip-on label holder.



Non-slip mats and PE foam inserts, see p. 267

Partition material | Sets







612 × 459 mm



Troughs

For front height

100.283.000


Art. no.

50 4-piece, Ø 33 mm* 12 troughs: 50 trough dividers: 4-piece, Ø 33 mm*



Trough and Allen key insert

For front height mm	Art. no.
50	100.312.000
5 troughs:	4-piece, Ø 33 mm*
20 trough dividers:	4-piece, Ø 33 mm*
6 troughs:	3-piece, Ø 45 mm*
20 trough dividers:	3-piece, Ø 45 mm*
1 Allen key insert	





Troughs


For front height Art. no. 50 100.313.000 6 troughs: 3-piece, Ø 45 mm*

20 trough dividers: 3-piece, Ø 45 mm* 2-piece, Ø 70 mm* 6 troughs: 10 trough dividers: 2-piece, Ø 70 mm*



Plastic boxes

For front height Art. no. 50 100.290.000 75 100.291.000 16 plastic boxes: $75 \times 75 \text{ mm}$ $150 \times 75 \text{ mm}$ 8 plastic boxes: 4 plastic boxes: $150 \times 150 \text{ mm}$





Plastic boxes

For front height Art. no.

50	100.292.000
75	100.293.000
100, 125	100.294.000

12 plastic boxes: $150 \times 75 \text{ mm}$ 6 plastic boxes: 150 × 150 mm



Slotted partitions and metal dividers

For front height mm	Art. no.	
50	100.950.000	
75	100.951.000	
100, 125	100.952.000	
150	100.953.000	


5 slotted partitions:27 E 18 metal dividers: 6 E



Slotted partitions and metal dividers

For front height mm	Art. no.	
	80.649.000	
75	100.314.000	
100, 125	80.651.000	
150	80.652.000	
200	80.653.000	
250	80.654.000	

3 slotted partitions: 27 E 8 metal dividers:



Dividers

2.7.40.5	
For front height mm	Art. no.
75	100.315.000
100, 125	100.130.000
150	100.131.000
200	100.132.000
250	100.133.000
2 dividers	27 E





Troughs

For front height mm	Art. no.
75	80.001.000
12 troughs:	4-piece, Ø 33 mm*
30 trough dividers:	4-piece, Ø 33 mm*
6 troughs:	3-piece, Ø 45 mm*
10 trough dividers:	3-piece, Ø 45 mm*



Troughs

For front height mm	Art. no.	
75, 100, 125	80.002.000	
6 troughs:	4-piece, Ø 33 mm*	
20 trough dividers:	4-piece, Ø 33 mm*	
6 troughs:	3-piece, Ø 45 mm*	
10 trough dividers:	3-piece, Ø 45 mm*	
6 troughs:	2-piece, Ø 70 mm*	
10 trough dividers:	2-piece, Ø 70 mm*	




Plastic boxes

For front height mm	Art. no.
50	80.045.000
75	80.046.000
100, 125	80.047.000
12 plastic boxes:	150×75 mm
12 plastic boxes:	150 × 150 mm



Plastic boxes


	~	
For front height mm	Art. no.	
50	80.043.000	
75	80.044.000	
20 plastic boxes:	75×75 mm	
14 plastic boxes:	$150 \times 75 \text{ mm}$	
6 plastic boxes:	$150 \times 150 \text{ mm}$	






Plastic boxes

For front height mm	Art. no.	
50	80.419.000	
75	80.049.000	
100, 125	80.050.000	
18 plastic boxes	150 × 150 mm	



Slotted partitions and metal dividers


For front height mm	Art. no.
50	80.003.000
75	80.004.000
100, 125	80.005.000
7 slotted partitions:	27 E
12 metal dividers:	6 E
2 metal dividers:	9 E



Slotted partitions and metal dividers

For front height mm	Art. no.
50	80.425.000
75	80.426.000
100, 125	80.427.000
150	80.428.000
200	80.429.000
250	80.430.000
300	80.431.000

2 slotted partitions: 27 E 2 metal dividers: 18 E



Slotted partitions and metal dividers

and metal dividers		
For front height mm	Art. no.	
50	80.015.000	
75	80.016.000	
100, 125	80.017.000	
150	80.018.000	
200	80.019.000	
250	80.020.000	
300	80.696.000	


4 slotted partitions: 27 E 2 metal dividers: 9 E 3 metal dividers: 12 E



Slotted partitions and metal dividers

For front height mm	Art. no.
50	80.009.000
75	80.010.000
100, 125	80.011.000
150	80.012.000
200	80.013.000
250	80.014.000
300	80.697.000


5 slotted partitions: 27 E 12 metal dividers:



Non-slip mats and PE foam inserts, see p. 267

The front height is the same as the height of the drawer front. For the actual height of the partition material see p. 262–265.

Partition material sets excluding clip-on label holder.



Correct use of partition material

Troughs should always be inserted in the running direction of the drawers to prevent round parts, such as drills or similar, from falling out when the drawers are closed forcefully.

18 × 36 F



306×612 mm



Troughs

For front height mm	Art. no.
50	80.618.000
8 troughs: 40 trough dividers:	4-piece, Ø 33 mm* 4-piece, Ø 33 mm*



Troughs

For front height mm	Art. no.
50	80.619.000
8 troughs: 30 trough dividers:	3-piece, Ø 45 mm* 3-piece, Ø 45 mm*

^{*} Take the usable height of the drawer into account according to the goods to be stored.



Troughs

For front height mm	Art. no.	
50	80.620.000	
8 troughs:	2-piece, Ø 70 mm	
20 trough dividers:	2-piece, Ø 70 mm	



Plastic boxes

For front height mm	Art. no.	
50	80.621.000	
75	80.622.000	
24 plastic boxes:	75×75 mm	
4 plastic boxes:	150 × 75 mm	




Plastic boxes

For front height mm	Art. no.	
50	80.623.000	
75	80.624.000	
100	80.625.000	
16 plastic boxes:	150 × 75 mm	



Plastic boxes

riastic boxes		
For front height mm	Art. no.	
50	80.626.000	
75	80.627.000	
100	80.628.000	
8 plastic boxes:	150×150 mm	



Slotted partitions and metal dividers

For front height mm	Art. no.
50	80.629.000
75	80.630.000
100	80.631.000
150	80.632.000

2 slotted partitions: 36 E 9 metal dividers: 6 E



Slotted partitions and metal dividers

For front height mm	Art. no.
50	80.633.000
75	80.634.000
100	80.635.000
150	80.636.000
200	80.637.000
300	80.638.000

1 slotted partition: 36 E 6 metal dividers: 9 E



27×36 E






ı	ro	ug	n	5
	_			

For front height mm	Art. no.
50	100.283.000
12 troughs:	4-piece, Ø 33 mm*
50 trough dividers:	4-piece, Ø 33 mm*



Troughs

For front height mm	Art. no.	
50	100.284.000	
4 troughs:	4-piece, Ø 33 mm*	
20 trough dividers:	4-piece, Ø 33 mm*	
8 troughs:	3-piece, Ø 45 mm*	
10 trough dividers:	3-piece, Ø 45 mm*	





Troughs

For front height mm	Art. no.	
50	100.286.000	
4 troughs:	3-piece, Ø 45 mm*	
20 trough dividers:	3-piece, Ø 45 mm*	
8 troughs:	2-piece, Ø 70 mm*	
10 trough dividers:	2-piece, Ø 70 mm*	



Plastic boxes

For front height mm	Art. no.
50	100.288.000
16 plastic boxes with	
centre divider:	$75 \times 75 \text{ mm}$
16 plastic boxes:	$75 \times 75 \text{ mm}$
4 plastic boxes:	$150 \times 75 \text{ mm}$
2 plastic boxes:	150 × 150 mm




Plastic boxes

For front height mm	Art. no.
50	100.290.000
75	100.291.000
16 plastic boxes 8 plastic boxes: 4 plastic boxes:	75×75 mm 150×75 mm 150×150 mm



Plastic boxes

For front height mm	Art. no.	
50	100.292.000	
75	100.293.000	
100, 125	100.294.000	
12 plastic boxes	150×75 mm	
6 plastic boxes:	150 × 150 mm	



Slotted partitions and metal dividers

For front height mm	Art. no.
75	100.270.000
100, 125	100.271.000
150	100.272.000
200	100.273.000
250	80.691.000
1 slotted partition:	36 E
1 metal divider:	12 E

15 E



Slotted partitions and metal dividers

For front height mm	Art. no.
75	100.275.000
100, 125	100.276.000
150	100.277.000
200	100.278.000
250	80.692.000

2 slotted partitions: 36 E 3 metal dividers:



Slotted partitions and metal dividers

For front height mm	Art. no.
50	100.244.000
75	100.245.000
100, 125	100.246.000
150	100.247.000


2 slotted partitions:36 E 10 metal dividers: 9 E



Slotted partitions and metal dividers

For front height mm	Art. no.
50	100.249.000
75	100.250.000
100, 125	100.251.000
150	100.252.000

3 slotted partitions: 36 E 6 metal dividers: 6 E 2 metal dividers: 9 E



1 metal divider:

Slotted partitions and metal dividers

100, 125	100.236.000
75	100.235.000
50	100.234.000
For front height mm	Art. no.

4 slotted partitions:36 E 15 metal dividers: 5 E 10 metal dividers: 6 E



Dividers


Dividers		
For front height mm	Art. no.	
75	100.265.000	
100, 125	100.266.000	
150	100.267.000	
200	100.268.000	
250	80.695.000	
2 dividers:	36 F	

The front height is the same as the height of the drawer front. For the actual height of the partition material see p. 262-265.

Partition material sets excluding clip-on label holder.

36×36 E






Troughs

Art. no.	
100.317.000	
4-piece, Ø 33 mm*	
4-piece, Ø 33 mm*	

* Take the usable height of the drawer into account according to the goods to be stored.



Troughs

For front height mm	Art. no.	
50	100.318.000	
8 troughs:	4-piece, Ø 33 mm*	
30 trough dividers:	4-piece, Ø 33 mm*	
8 troughs:	3-piece, Ø 45 mm*	
20 trough dividers:	3-piece, Ø 45 mm*	



Troughs

For front height mm	Art. no.
50	100.319.000
4 troughs:	4-piece, Ø 33 mm*
30 trough dividers:	4-piece, Ø 33 mm*
8 troughs:	3-piece, Ø 45 mm*
20 trough dividers:	3-piece, Ø 45 mm*
4 troughs:	2-piece, Ø 70 mm*
10 trough dividers:	2-piece, Ø 70 mm*



Troughs

For front height mm	Art. no.	
50	100.320.000	
16 troughs:	3-piece, Ø 45 mm*	
60 trough dividers:	3-piece, Ø 45 mm*	



Troughs

For front height mm	Art. no.	
50	100.322.000	
16 troughs:	2-piece, Ø 70 mm*	
40 trough dividers:	2-piece, Ø 70 mm*	



Plastic boxes

For front height mm 50 75	Art. no.	
	100.380.000	
	100.381.000	
16 plastic boxes:	75×75 mm	
16 plastic boxes:	$150 \times 75 \text{ mm}$	
4 plastic hoves	150 × 150 mm	



Plastic boxes

For front height mm 50	Art. no.	
	100.389.000	
75	100.390.000	
100, 125	100.391.000	
16 plastic boxes:	150×75 mm	
8 plastic boxes:	150 × 150 mm	



Slotted partitions and metal dividers

For front height mm	Art. no.
100, 125	100.354.000
150	100.355.000
200	100.356.000
250	80.688.000
300	100.357.000

1 slotted partition: 36 E 2 metal dividers: 18 E



Slotted partitions and metal dividers

Art. no.
100.348.000
100.349.000
100.350.000
100.351.000

2 slotted partitions: 36 E 8 metal dividers: 12 E



Slotted partitions and metal dividers

For front height mm	Art. no.
75	100.343.000
100, 125	100.344.000
150	100.345.000
200	100.346.000
250	80.689.000


3 slotted partitions:36 E 15 metal dividers: 9 E



Slotted partitions and metal dividers

For front height mm	Art. no.
50	100.333.000
75	100.334.000
100, 125	100.335.000
100, 123	100.333.000

4 slotted partitions:36 E 12 metal dividers: 6 E 9 metal dividers: 9 E




Slotted partitions and metal dividers

For front height mm	Art. no.
50	100.329.000
75	100.330.000
100, 125	100.331.000

5 slotted partitions:36 E 20 metal dividers: 6 E

45×36 E





Troughs

For front height mm	Art. no.
50	80.490.000
20 troughs:	4-piece, Ø 33 mm*
80 trough dividers:	4-piece, Ø 33 mm*

* Take the usable height of the drawer into account according to the goods to be stored.



Plastic boxes

For front height mm	Art. no.
50	80.496.000
75	80.497.000
20 plastic boxes: 20 plastic boxes: 5 plastic boxes:	75 × 75 mm 150 × 75 mm 150 × 150 mm




Plastic boxes

For front height mm	Art. no.
50	80.498.000
75	80.499.000
100, 125	80.500.000
20 plastic boxes: 10 plastic boxes:	150×75 mm 150×150 mm



Plastic boxes

For front height mm	Art. no.	
50	80.501.000	
75	80.502.000	
100, 125	80.503.000	
20 plastic boxes:	150 × 150 mm	



Slotted partitions and metal dividers

For front height mm	Art. no.
100, 125	100.354.000
150	100.355.000
200	100.356.000
250	80.688.000
300	100.357.000

1 slotted partition: 36 E 2 metal dividers: 18 E



Slotted partitions and metal dividers

For front height mm	Art. no.	
100, 125	80.504.000	
150	80.505.000	
200	80.506.000	
250	80.507.000	
300	80.508.000	


2 slotted partitions: 36 E 8 metal dividers: 15 E



Slotted partitions and metal dividers

For front height mm	Art. no.
75	80.509.000
100, 125	80.510.000
150	80.511.000
200	80.512.000

3 slotted partitions: 36 E 5 metal dividers: 9 E 10 metal dividers: 12 E



Slotted partitions and metal dividers

For front height mm	Art. no.
75	80.513.000
100, 125	80.514.000
150	80.515.000
200	80.516.000
250	80.517.000

4 slotted partitions:36 E 21 metal dividers: 9 E




The front height is the same as the height of the drawer front. For the actual height of the partition material see p. 262–265.

Partition material sets excluding clip-on label holder.

54 × 36 F





Troughs

For front height mm	Art. no.
50	80.387.000
16 troughs: 30 trough dividers: 8 troughs: 10 trough dividers:	4-piece, Ø 33 mm* 4-piece, Ø 33 mm* 3-piece, Ø 45 mm* 3-piece, Ø 45 mm*



Troughs

For front height mm	Art. no.
50	80.388.000
8 troughs:	4-piece, Ø 33 mm*
20 trough dividers:	4-piece, Ø 33 mm*
8 troughs:	3-piece, Ø 45 mm*
10 trough dividers:	3-piece, Ø 45 mm*
8 troughs:	2-piece, Ø 70 mm*
10 trough dividers:	2-piece, Ø 70 mm*



Plastic boxes

For front height mm 50 75 100, 125	Art. no.	
	80.449.000	
	80.405.000 80.406.000	
12 plastic boxes:	150×75 mm	
18 plastic boxes:	150 × 150 mm	



Plastic boxes

For front height mm	Art. no.
50	80.450.000
75	80.407.000
20 plastic boxes:	75×75 mm
14 plastic boxes:	$150 \times 75 \text{ mm}$
12 plastic boxes:	150 × 150 mm

^{*}Take the usable height of the drawer into account according to the goods to be stored.



Plastic boxes


For front height mm	Art. no.	
50	80.451.000	
75	80.452.000	
100, 125	80.453.000	
24 plastic boxes:	150 × 150 mm	



Slotted partitions and metal dividers

For front height mm	Art. no.
50	80.481.000
75	80.403.000
100, 125	80.404.000


7 slotted partitions:36 E 12 metal dividers: 6 E 2 metal dividers: 9 E



Slotted partitions and metal dividers

For front height mm	Art. no.
50	80.533.000
75	80.389.000
100, 125	80.390.000
150	80.391.000
200	80.392.000
250	80.393.000
300	80.394.000


4 slotted partitions: 36 E 2 metal dividers: 9 E 3 metal dividers: 12 E



Slotted partitions and metal dividers

For front height mm	Art. no.
50	80.479.000
75	80.395.000
100, 125	80.396.000
150	80.397.000
200	80.398.000
250	80.399.000
300	80.400.000
300	80.400.000

5 slotted partitions:36 E 12 metal dividers: 9 E




Dividers

For front height mm	Art. no.	
50	80.457.000	
75	80.458.000	
100, 125	80.459.000	
150	80.460.000	
200	80.461.000	
250	80.462.000	
300	80.463.000	

2 slotted partitions: 36 E

2 metal dividers 18 E



Non-slip mats and PE foam inserts, see p. 267

Note

The front height is the same as the height of the drawer front. For the actual height of the partition material see p. 262-265.

Partition material sets excluding clip-on label holder.










1326×612 mm




Slotted partitions and metal dividers

For front height mm	Art. no.
50	80.600.000
100, 125	80.601.000
150	80.602.000
6 slotted partitions:	36 E
6 metal dividers:	9 E
1 metal divider:	10 E



Slotted partitions and metal dividers

For front height mm	Art. no.
75	80.603.000
100, 125	80.604.000
150	80.605.000
5 slotted partitions:	36 E
2 metal dividers:	9 E
3 metal dividers:	12 E
1 metal divider:	10 E



Slotted partitions and metal dividers

For front height mm	Art. no.
75	80.553.000
100, 125	80.554.000
150	80.555.000
6 slotted partitions:	36 E
4 metal dividers:	9 E
2 metal dividers:	12 E
1 metal divider:	18 E



Slotted partitions and metal dividers

For front height mm	Art. no.
75	80.556.000
100, 125	80.557.000
150	80.558.000
5 slotted partitions:	36 E
2 metal dividers:	9 E
2 metal dividers:	12 E
2 metal dividers:	18 E



Partition material | Slotted partitions, metal dividers and dividers





For lengthwise partitioning of drawers in combination with metal dividers. Specification: Steel sheet, colour: Grey, NCS S 4502-B.

Metal dividers

Together with the slotted partitions, they can be used to subdivide the drawers as desired. Specification: Aluminium



Dividers

For lengthwise and crosswise partitioning of drawers. Specification: Steel sheet, colour: Grey, NCS S 4502-B.

Drawer front height mm

Length mm	
304	
456	
610	
762	
915	
1085	
1323	

D ₁ 71	Length mm		
Slotted partitions, both sides			
27 E	27 E 456		
36 E	610		

 $W_1 \rightarrow$

252

303

Metal dividers


15 E

18 E

	441
3 E	48
4 E	65
5 E	82
6 E	98
7 E	116
8 E	133
9 E	149
10 E	167
12 E	201

How do I use the slotted partitions, metal dividers and dividers in my LISTA drawer?

Example: for drawer units 45×36 E (765 \times 612 mm)

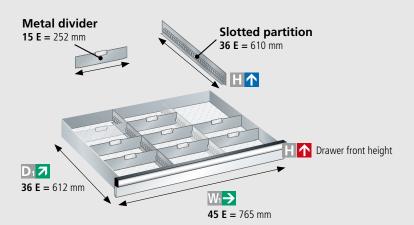











50 mm	75 mm	100, 125 mm	150 mm	200 mm	250 mm	300 mm
31,5	50	75	125	175	225	275
rt. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.
pcs/set	1 pcs/set	1 pcs/set	1 pcs/set	1 pcs/set	1 pcs/set	1 pcs/set
12.088.000	12.121.000	12.089.000	12.090.000	12.122.000		12.091.000
30.237.000	80.121.000	80.127.000	80.133.000	80.139.000	80.222.000	80.243.000
30.239.000	80.123.000	80.129.000	80.135.000	80.141.000	80.225.000	80.144.000
30.541.000	80.542.000	80.543.000	80.544.000	80.545.000	80.546.000	80.547.000
0.178.000	80.179.000	80.180.000	80.181.000	80.182.000	80.183.000	80.184.000
-	80.124.000	80.130.000	80.136.000	80.142.000	80.228.000	80.229.000
-	80.125.000	80.131.000	80.137.000	80.143.000	80.685.000	80.233.000
Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.
pcs/set	5 pcs/set	5 pcs/set	5 pcs/set	3 pcs/set	3 pcs/set	3 pcs/set
80.307.000	80.308.000	80.309.000	80.310.000	80.311.000	80.312.000	80.313.000
80.314.000	80.315.000	80.316.000	80.317.000	80.318.000	80.319.000	80.320.000
Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.	Art. no.
pcs/set	5 pcs/set	5 pcs/set	5 pcs/set	5 pcs/set	5 pcs/set	5 pcs/set
95.261.000	95.272.000	95.302.000	-	-	-	-
95.262.000	95.273.000	95.303.000	-	-	-	-
95.263.000	95.274.000	95.304.000	-	-	<u>-</u>	-
95.264.000	95.275.000	95.305.000	95.313.000	-	-	-
95.265.000	95.276.000	95.306.000	95.314.000	95.321.000	-	-
95.266.000	95.277.000	95.307.000	95.315.000	95.322.000	95.328.000	-
95.267.000	95.278.000	95.308.000	95.316.000	95.323.000	95.329.000	95.368.000
5.268.000	95.279.000	95.309.000	95.317.000	95.324.000	95.330.000	95.369.000
5.269.000	95.280.000	95.310.000	95.318.000	95.325.000	95.365.000	95.370.000
95.270.000	95.300.000	95.311.000	95.319.000	95.326.000	95.366.000	95.371.000
5.271.000	95.301.000	95.312.000	95.320.000	95.327.000	95.367.000	95.372.000
					10 pcs/set	
		fastening the metal dividers to 1			134.002.000	

Clip-on label holders for slotted

partitions for fitting into all slotted partitions and the inner slots of the drawer fronts. Labels not included.



Label size (W×H) mm	Quantity	Art. no.
27×12	10 holders	80.305.000
47×12	10 holders	80.306.000


Barcode holder including protective shield for slotted partitions, metal dividers and dividers including labels.



Label size (W×H) mm	For drawer front height mm	Quantity	Art. no.
47×12	50 to 300	10	80.321.000
62×12	50 to 300	10	80.322.000
62×21,8	50 to 300	10	80.323.000
62×29	75 to 300	10	80.324.000

Clip-on label holders for slotted partitions, metal dividers and divider

including labels.



LISTA-Script labels "Standard pack"

The labelling software can be downloaded from the LISTA website **www.lista.com** under Products > Accessories > LISTA Script.



Label size		11111
(W×H) mm	Quantity	Art. no.
210×22/70×22	2 sheets	80.325.000
47 × 12	76 labels	
47 × 18	52 labels	
27×12	133 labels	

Partition material | Plastic boxes and troughs



Especially suitable for drawers with a front height of: 50, 75, 100, 125 mm

* The plastic box also has a fixed centre divider. How can I partition my LISTA drawer? Example: Plastic boxes and troughs for drawers 36×27 E (612 \times 459 mm) 4,5 × 4,5 E * $75 \times 75 \text{ mm}$ 4,5 × 4,5 E 4,5×9 E $75 \times 75 \text{ mm}$ 9×9E 75 × 150 mm 150 × 150 mm 9×9E $150 \times 150 \text{ mm}$ Drawer front height **27 E =** 459 mm **36 E =** 612 mm

Perfect drawer partitioning Store your small and round parts professionally and perfectly in the LISTA drawers with LISTA plastic boxes and troughs. The table on the right shows the maximum capacity of your drawer for each size of plastic boxes and troughs. The dimensions are standardised but can be combined if desired and fit into any LISTA drawer. Please bear the front height of your drawer in mind (external dimension)!

Maximum capacity per plastic box for: Drawer units (E)				9 × 9 E 150 × 150 mm	4,5 × 9 E 75 × 150 mm	4,5 × 4,5 E 75 × 75 mm
		Number of plastic boxes/troughs	Number of plastic boxes	Number of plastic boxes		
$W_1 \rightarrow D$	1 7 1					
18×27	$306 \times 459 \text{ mm}$	6	12	24		
27×27	459×459 mm	9	18	36		
36×27	612×459 mm	12	24	48		
54×27	918×459 mm	18	36	72		
18×36	306×612 mm	8	16	32		
27×36	459×612 mm	12	24	48		
36×36	612×612 mm	16	32	64		
45×36	765×612 mm	20	40	80		
54×36	918×612 mm	24	48	96		
64×36	1088 × 612 mm	28	56	112		
78×36	1326×612 mm	32	68	136		

264



Plastic boxes, standard



Drawer front

H height (mm)

50

75

100





75 × 150 mm

75 × 75 mm



75 × 75 mm

150 × 150 mm

Art. no.

6 pcs/set

80.187.000

80.186.000

80.192.000

Height

26

46

71

Art. no.	Art. no.
6 pcs/set	12 pcs/set
80.191.000	80.189.000
80.190.000	80.188.000
80.193.000	-

Art. no.

12 pcs/set	
80.185.000*	
	-
	_


^{*} The plastic box Art. no. 80.185.000 also has a fixed centre divider.

Troughs, standard

Troughs, 9 × 9 E, 6 pieces

Dividers, 10 pieces





6 pcs/set

10 pcs/set

9 × 9 E (150 × 150 mm)





Ø 33 mm, 4 troughs

Ø 45 mm, 3 troughs

Ø 70 mm, 2 troughs

Αı	t.	no

	80.196.000
	134.044.000

Art. no.

80.195.000 134.040.000

Art. no.

80.194.000 134.020.000

Specification

Plastic boxes/troughs also available in ESD.

N.B.: Take the usable height of the drawer into account according to the goods to be stored.

Clip-on label holders for plastic boxes

for inserting into the groove on the plastic boxes. Including labels and transparent sheets.





Label size $(W \times H) mm$ Quantity Art. no. 47×12 20 tabs 134.034.000

Correct use of partition material

Troughs should always be inserted in the running direction of the drawers to prevent round parts, such as drills or similar, from falling out when the drawers are closed forcefully.

Clip-on label holders for dividers

fit directly onto the dividers. Including paper and transparent sheet.



- CONTRACTOR 1
11


47 × 12 (Ø 70 mm)	20 tabs	134.049.000
27×12	20 tabs	134.029.000
Label size (W×H) mm	Quantity	Art. no.

LISTA-Script labels "Standard pack"

The labelling software can be downloaded from the LISTA website $\boldsymbol{www.lista.com}$ under Products > Accessories > LISTA Script.




	A 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Quantity	Art. no.
2 sheets	80.325.000
76 labels	
52 labels	
133 labels	
	2 sheets 76 labels 52 labels



Pairs of grooved inserts

Consisting of main and secondary components. They are attached by inserting between two slotted partitions. They can be divided by metal separators. Main components slotted for dividing into small compartments or marking with label holders. Specification: ABS plastic. Colour: red. Main component: width 153 mm/9 E, depth 68 mm/4 E. Secondary component: width 153 mm/9 E, depth 34 mm/2 E.

Number of grooves	Max. tool Ø mm	Art. no.
6	20,5	80.078.000
8	15	80.079.000
11	10	80.080.000



Label holders

Specification: aluminium, for labelling.

Width mm	Height mm	Art. no.
29	25	100.527.000
29	50	100.521.000
29	75	100.522.000



Milling cutter holder, height 26 mm

The milling cutter holders can be lengthened as desired by screwing them on top of one another. They are screwed onto the perforated drawer bottom. Including screw nuts. Specification: ABS plastic. Colour: red.

For tool bore (DIN) Ø mm	Ø mm	Inch	Number	Art. no.
13	12,2	1/2	5	80.765.000
16	15,5	-	5	80.766.000
22	21,5	-	5	80.767.000
25,5	25	1	5	100.103.000
27	26,5	-	5	100.099.000
32	31,2	-	5	100.100.000
38	37,5	1 1/2	5	100.104.000
40	39,5	-	5	100.101.000
50	49,5	-	5	100.102.000



Holding pins

For positioning and holding irregularly shaped tools. The holding pins are screwed onto the perforated drawer bottom. Including screw nuts. Specification: round steel, bright galvanised.

For front height mm	Ø mm	Height mm	Number	Art. no.
50	6	27	10	134.036.000
75	6	52	10	134.054.000
100	6	77	10	134.057.000



Pair of angular supports, height 52 mm

The pair of angular supports can be screwed horizontally or vertically onto the perforated drawer bottom. Screw fasteners included. Specification: ABS plastic. Colour: red.

Width mm	Depth mm	Art. no.
25	75	80.077.000



Non-slip mats

Non-slip mats to protect delicate inventory items. For placing onto the bottom of the drawer. Specification: nylon/PVC mesh mats. Colour: anthracite.

For drawer sizes Unit (E)	Width mm	Depth mm	Thickness mm	Art. no.
18×27	300	450	3	119.001.000
18×36	300	600	3	119.000.000
27×27	450	450	3	119.020.000
27×36, 36×27	450	600	3	100.396.000
36×36	600	600	3	100.394.000
45×36	750	600	3	130.743.000
54×27	900	450	3	119.119.000
54×36	900	600	3	130.745.000
64×36	1080	600	3	119.028.000
78×36	1320	600	3	119.031.000



Foam inserts

For storing very delicate or irregularly shaped parts. To achieve a snug fit, areas can be cut out of the foam with plunge cutters. Specification: polyethylene plastic. Colour: black.

For drawer sizes Unit (E)	Width mm	Depth mm	Thickness mm	Art. no.
36×27, 27×36	600	447	22	80.917.000
36×36	600	600	22	80.918.000
54×27	906	447	22	80.923.000
54×36	906	600	22	80.919.000
78×36	1320	600	22	80.980.000



Underlay for foam inserts

Specification: polyethylene plastic. Colour: blue.

For drawer sizes Unit (E)	Width mm	Depth mm	Thickness mm	Art. no.
36×27, 27×36	600	447	3	80.906.000
36×36	600	600	3	80.907.000
54×27	906	447	3	80.924.000
54×36	906	600	3	80.908.000
78×36	1320	600	3	80.981.000



Plunge cutter for foam inserts

For accurate cutting of the blank PE foam inserts.

Width mm	Height mm	Art. no.
20	80	80.920.000
50	80	80.921.000
20×20 "U" shape	80	80.922.000



LISTA Script labelling system

LISTA

With LISTA Script, your LISTA products can be simply and clearly labelled. The labelling software can be downloaded from our website. The matching labels are supplied as perforated A4 sheets suitable for any commercially available printer. There are almost no limits to the ways you can design labels. As always with LISTA.



Easy to use in three simple steps



1. Design

Design the labels using LISTA Script labelling software



2. Print

 Print the labels on perforated A4 sheets and detach them in the desired size



3. Insert

 Open the viewing window, insert the label and close the viewing window by pressing the bottom edge



➡ Pre-perforated labels for cabinets and partition material

LISTA labels are available in the sizes 70×22 mm, 140×22 mm and 210×22 mm for cabinet labelling and 27×12 mm, 47×12 mm and 47×18 mm for labelling partition material.



Label size 210 × 22 mm

for labelling drawers



Label size 70 × 22 mm

for labelling housing



Label size 70 × 22 mm

for labelling drawers



All labels

on perforated A4 sheets




Label size 27 × 12 mm

for labelling troughs



Label size 47 × 12 mm

for labelling plastic boxes



Label size 47 × 18 mm

for labelling dividers

LISTA Script labels "Standard pack"

Label size $(W \times H) mm$ Quantity Art. no. 210 × 22 / 70×22 2 sheets 80.325.000 133 labels 27 × 12 47 × 12 76 labels 52 labels 47×18

* Clip-on label holders

To hold clip-on label holders, for fitting into the slots inside the drawer fronts, see partition material p. 262.





Label strips with and without labels


For labelling shelves, clothes lockers, etc. Specification: plastic, with hinged transparent protector, self-adhesive.

Width mm	labels	Height mm	Max. font heigh mm	nt Quantity	Art. no.
105	-	22	14	1	18.926.000
210	-	22	14	1	18.927.000
1000	-	22	14	1	18.929.000
105	•	22	14	10	18.930.000
210	•	22	14	10	18.931.000

with labels

- without labels

LISTA Script labels for label strips



For drawer handles and disassembly tools, please contact us.

THERE FOR YOU ALL OVER THE WORLD

LISTA is there for you, on several continents, in many different locations. In addition to our two plants at the headquarters in Erlen (Switzerland) and in Bergneustadt (Germany), we also look after and advise our customers through our international sales branches in Europe and China. A close-knit network of retail partners tops off the service that we offer.





LISTA Group locations

Switzerland, Germany, Austria, France, Italy, England, Spain, China



Founding

1945

Headquarters

Erlen (TG), Switzerland



Production sites

Erlen (CH), Bergneustadt (DE)

ORDERING AND CONTACT

Lista AG Switzerland

Fabrikstrasse 1 CH-8586 Erlen

Telephone +41 71 649 21 11 Fax +41 71 649 22 03 info@lista.com

Lista Italia s.r.l. Italy

Telephone +39 02 935 70 196/362 Telephone + 33 4 50 31 71 71 Fax +39 02 935 70 417 info.it@lista.com

Lista GmbH Germany

Brückenstrasse 1 D-51702 Bergneustadt Telephone +49 2261 40 30 Fax +49 2261 40 32 22 info.de@lista.com

Lista France France

Fax + 33 4 50 31 71 79 info.fr@lista.com

Lista Austria GmbH Austria

Telephone +43 1 291 20 Fax +43 1 291 204 info.at@lista.com

Lista Sistemas de Almacenaje, S.A. Spain

Telephone +34 938 575 927 info.es@lista.com

Lista (UK) Ltd. United Kingdom

Telephone +44 1 908 222 333 Fax +44 1 908 222 433 info.uk@lista.com

COLOUR YOUR WORKSPACE

Twelve standard colours, six colour combinations, all other colours available. Whether a workbench or drawer cabinet in red, green or violet: LISTA can supply any product, in any colour and colour combination on request. This means that you can design your own individual system with absolute flexibility. All options are possible, from different colours for individual work areas to storage and workspace furnishing in corporate design colours.

In addition to classic standard colours like pale blue, pale grey, pure white or black, you can choose from 12 other predefined colours or simply specify the colours you want. And you can order housings and drawers in different colours. Because when we say flexible, we mean it.

Standard colours







.020 Light grey RAL 7035



Reseda green RAL 6011



Capri blue RAL 5019



Metallic grey NCS S 6502-B



.060 Black NCS S 9000-N







Dove grey
NCS S 4502-B



Gentian blue RAL 5010







Pure white RAL 9010



Anthracite grey RAL 7016



Pale blue RAL 5012 Light grey RAL 7035



Light grey RAL 7035 Signal blue RAL 5005



Light grey
RAL 7035
Metallic grey
NCS S 6502-B



Metallic grey NCS S 6502-B Light grey RAL 7035



Light grey RAL 7035 Ruby red RAL 3003



Ruby red RAL 3003 Metallic grey NCS S 6502-B





Other pre-defined colours*



















White aluminium **RAL 9006**









Sky blue

RÁL 5015

























Orange **RAL 2004**

The clever measurements system

The LISTA units

As a practical grid system, LISTA units enable clear assignment of housing, drawer and partition material. A LISTA unit (U) is 17 mm and is based on the grid system for partitioning drawers. Drawer cabinet housings and the drawers that fit into the housing are based on the same LISTA units, even though they have different dimensions.

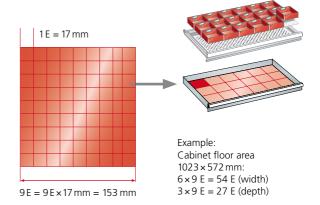

	Depth 27 E			Depth 36 E							
LISTA units	18×27 E	27×27 E	36×27 E	54×27 E	18×36 E	27×36 E	36×36 E	45×36 E	54×36 E	64×36 E	78×36 E
Cabinet base area mm	411×572	564×572	717 × 572	1023 × 572	411×725	564×725	717×725	870×725	1023×725	1193×725	1431×725
Drawer usable surface mm	306×459	459×459	612×459	918×459	306×612	459×612	612×612	765×612	918×612	1088×612	1326×612

^{*}The other predefined colours are available at extra cost.

Explanation of symbols

Product features



10-year guarantee



Proven safety



ESD available



Height adjustment in mm



Drawer load capacity in kg



Shelf load capacity in kg



Pull-out shelf load capacity in kg



Bench load capacity in kg



Housing load capacity in kg



Vertical pull-out load capacity in kg

Locking systems



KEY Lock

The standard locking system with replaceable cylinders makes it easy to adapt to existing locking systems. The locking system secures all drawers simultaneously.



CODE Lock

Here the key is replaced by a numeric combination. A simple four to six-digit numeric combination is sufficient to open the drawer cabinets.



RFID Lock

The LISTA RFID Lock enables automatic and contactless locking through radio frequency identification. It consists of a transponder in the lock and a mobile control unit such as badge or card.



AUTO Lock

Like RFID Lock, opens and locks automatically however; can also be time-dependent.



Legal notice

Publisher:

Lista AG

Fabrikstrasse 1 CH-8586 Erlen info@lista.com www.lista.com

This documentation was produced in good faith. The publisher accepts no liability in respect of misprints, errors or omissions. Due to the printing process, colours may deviate from the original colours.

General terms and conditions

The general terms and conditions and other current information can be found at www.lista.com.

This document is protected by copyright. Any reprinting — even in part — requires written permission from the publisher.

